



HIGH POWER TERMINATION --- RFST200G02

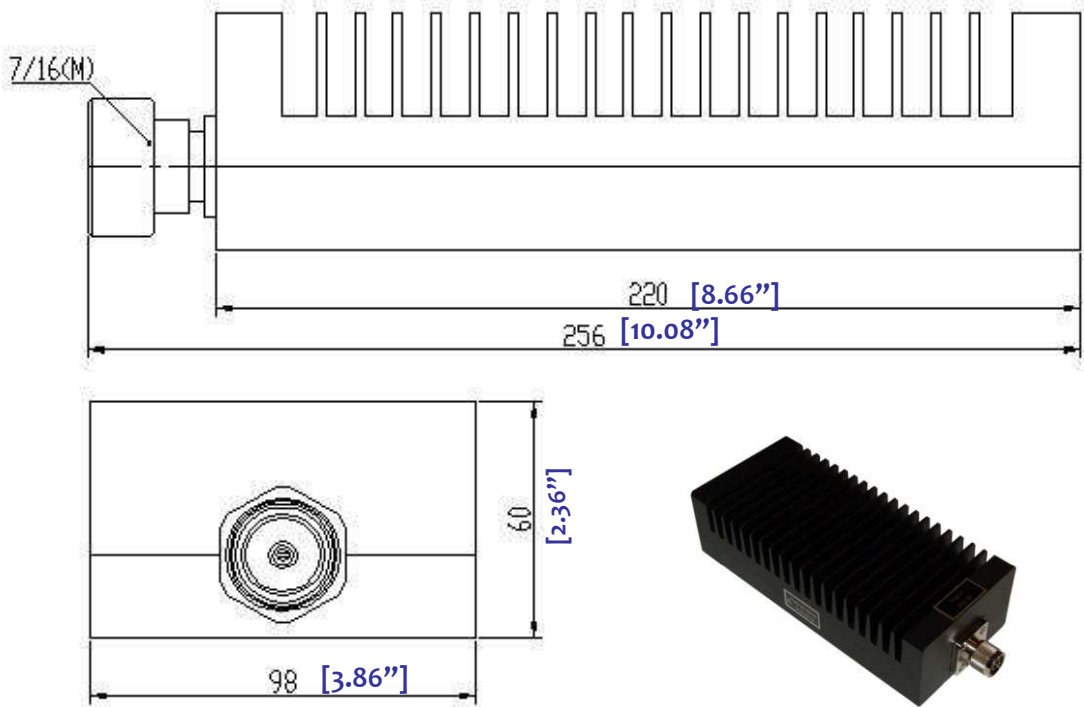

S11 SWR 200.0m/ Ref 1.000 [F2]

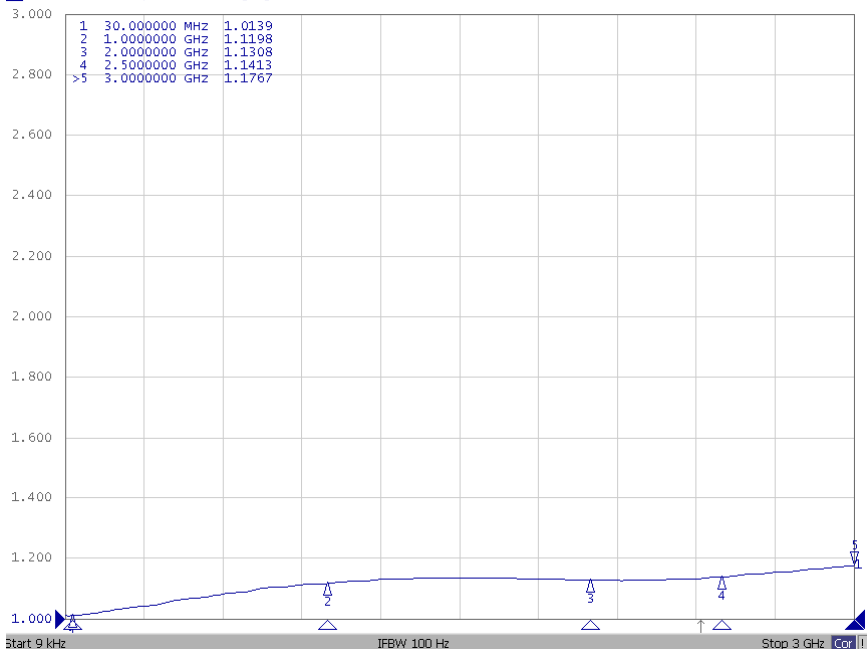

2.0	Environment specifications	
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-55°C~+125°C
2.3	Altitude	41500 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc
2.7	Cooling	FAN required for long time operation

1.0	Mechanical Specifications	
1.1	Connector	N,TNC,7/16
1.2	Size	256 X 98 X 60mm 10.08" X 3.86" X 2.36"
1.3	External Finish	Body painted black epoxy enamel

3.0 Electrical Specifications				
PN	Frequency (GHz)	VSWR (max.)	Power (CW)	Peak Power (KW)
RFST200G02	DC-2GHz	1.20	200	10KW 5μs 0.5%

PAGE 1 OF 1		DATE	Sep 2 nd 1506
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITINGS BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY		DESIGN	RFP6
		RF-LAMBDA	RFP6
		CAD MODEL REVISION	10
		ASSEMBLY REVISION	VS52
 RFST200G02 HIGH POWER TERMINATION		ASSEMBLY NAME	RFLVR07
		DRAWING NUMBER	005-A
www.rflambda.com		SIZE	11
RF-LAMBDA		SHEETS	1 OF 1