
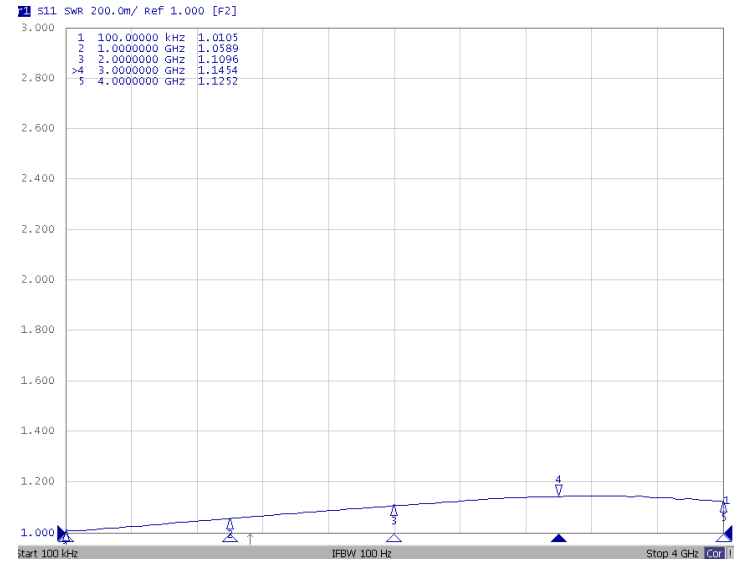


HIGH POWER TERMINATION --- RFST100G04

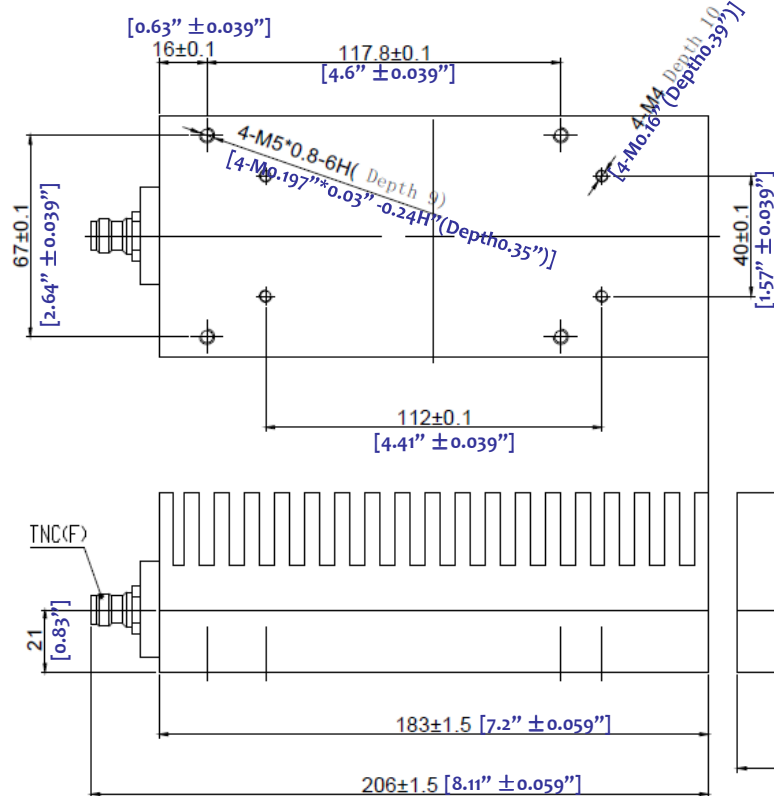

2.0	Environment specifications	
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-55°C~+125°C
2.3	Altitude	41500 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc
2.7	Cooling	FAN required for long time operation

1.0	Mechanical Specifications	
1.1	Connector	N,TNC,7/16
1.2	Size	215.6 X 80 X 60mm 8.49" X 3.15" X 2.36"
1.3	External Finish	Body painted black epoxy enamel

3.0 Electrical Specifications				
PN	Frequency (GHz)	VSWR (max.)	Power (CW)	Peak Power (KW)
RFST100G04	DC-4GHz	1.25	100	5KW 5μs 0.5%

PAGE 1 OF 1	DATE Sep 2 nd 1506
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITINGS BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY	DESIGN RFPC RF-LAMBDA RFPC CAD MODEL REVISION 10 ASSEMBLY REVISION VS52 ASSEMBLY NAME RFLVR07 DRAWING NUMBER D05-A
RFST100G04 HIGH POWER TERMINATION	www.rflambda.com RF-LAMBDA
SIZE IT	SHEETS 1 OF 1