

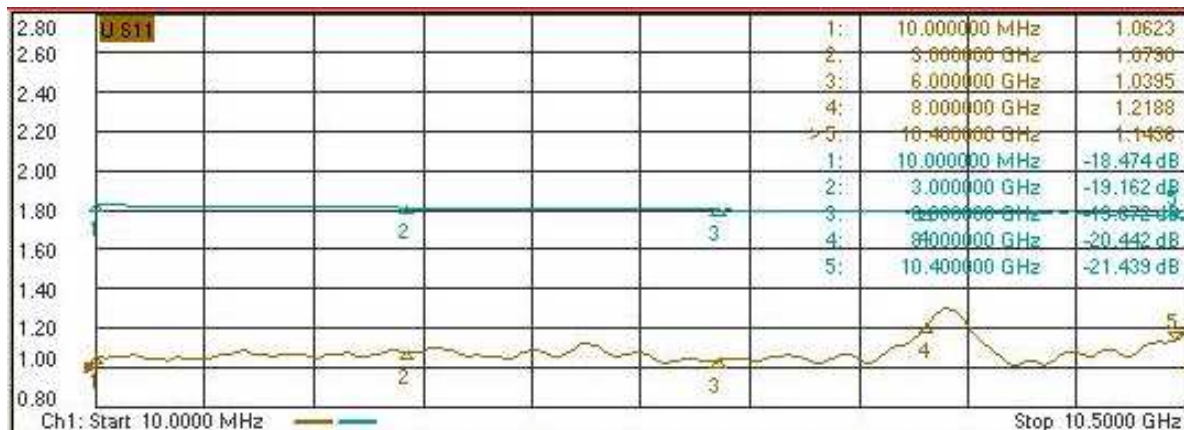


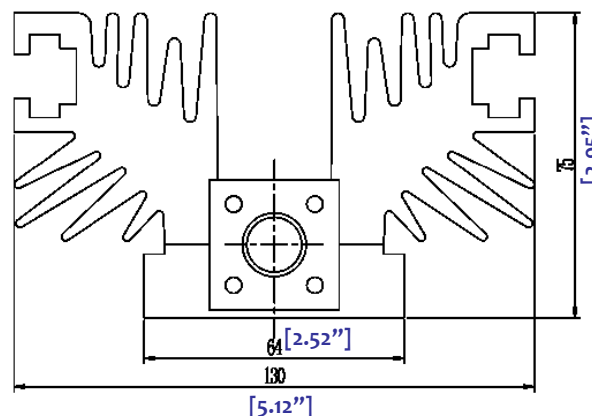

HIGH POWER FIXED TERMINATION --- RFST400GXX

1.0	Mechanical Specifications	
1.1	Connector	N or 7/16 (Male or Female)
1.2	Size	340 X 130 X 75mm 13.38" X 5.12" X 2.95"
1.3	Weight	3.5kg
1.4	External Finish	Body painted black epoxy enamel

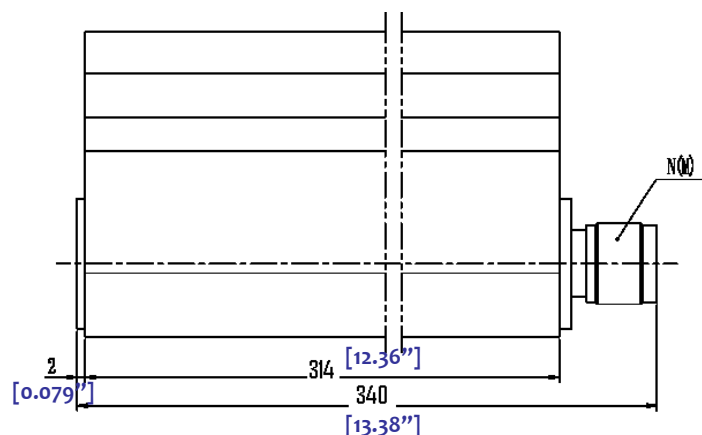

2.0	Environment specifications	
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-55°C~+125°C
2.3	Altitude	44000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc
2.7	Cooling	FAN required for long time operation

3.0 Electrical Specifications				
PN	Frequency (GHz)	VSWR (max.)	Power (CW)	Peak Power (KW)
RFST400G06	DC-6GHz	1.30	400	5KW
RFST400G08	DC-8GHz	1.45	400	5KW
RFST400G10	DC-10GHz	1.50	400	5KW

PAGE 1 OF 1	DATE Sep 2 nd 2006
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY.	DESIGN RFPG
RF-LAMBDA	RF-LAMBDA
CAD MODEL REVISION 10	ASSEMBLY REVISION VS52
ASSEMBLY NAME RFLVR07	DRAWING NUMBER 005-A
www.rflambda.com	SIZE 11
RF-LAMBDA	SHEETS 1 OF 1