





75W HIGH POWER EMBEDDED TERMINATION

--- RFSTB75GXX

1.0	Mechanical Specifications	
1.1	Coaxial Connector	N,SMA
1.2	Size	69×51×27mm 2.44"×2.01"×1.06"
1.3	External Body Finish	Body painted with gray/black epoxy enamel

2.0	Environment specifications	
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-55°C~+125°C
2.3	Altitude	42000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msec
2.7	Cooling	FAN required for long time operation

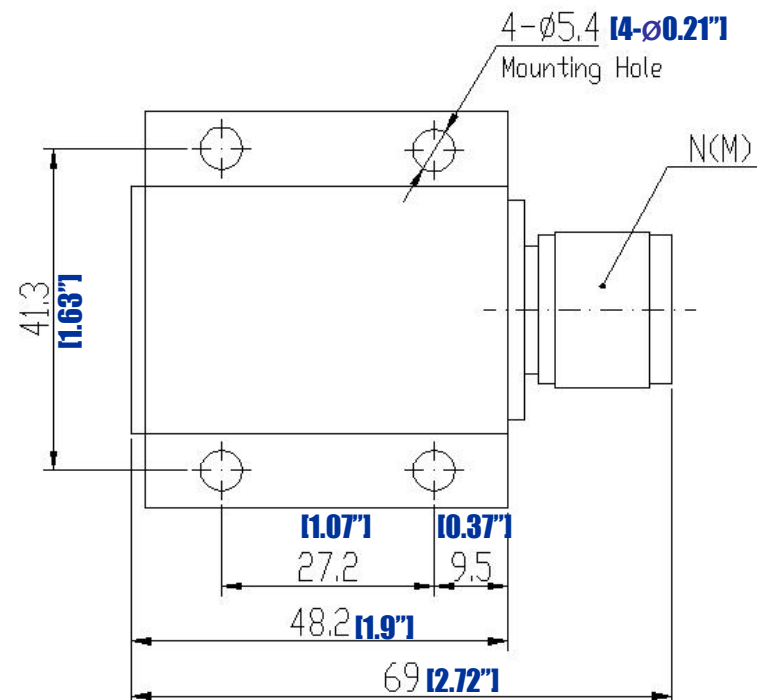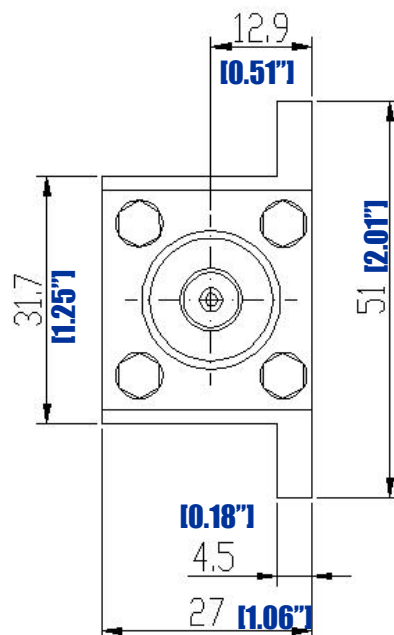

3.0	Electrical Specifications				
PN	Frequency (GHz)	Nominal Impedance	Average Power	Peak Power	VSWR (max.)
RFSTB75G06	DC-6	50Ω	75W	10KW	1.2
RFSTB75G08	DC-8	50Ω	75W	10KW	1.25
RFSTB75G10	DC-10	50Ω	75W	10KW	1.35
RFSTB75G18	DC-18	50Ω	75W	10KW	1.35

PAGE 1 OF 1		DATE	JUN 12 th 2009
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITINGS BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY		DESIGN	RFPC
		RF-LAMBDA	RFPC
		CAD MODEL REVISION	10
		ASSEMBLY REVISION	VS52
 RFSTB75GXX HIGH POWER TERMINATION		ASSEMBLY NAME	RFLVR07
		DRAWING NUMBER	D05-A
www.rflambda.com		SIZE	LT
RF-LAMBDA		SHEETS	1 OF 1