


# 3.5mm DC-26.5GHz 2W TERMINATION


--- RFST10G26V

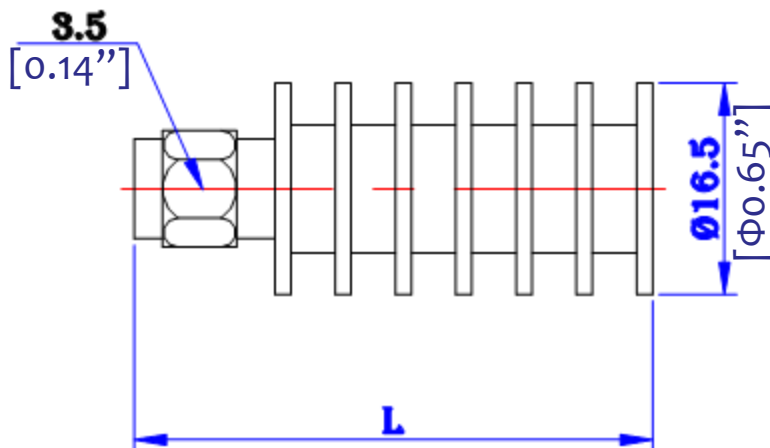

1.0	Mechanical Specifications	
1.1	Coaxial Connector	3.5mm-male
1.2	External Body Finish	Body painted black epoxy enamel
1.3	Weight	15g

2.0	Environment specifications	
2.1	Operation Temp.	-50°C~+120°C (case temp.)
2.2	Storage Temp.	-55°C~+125°C
2.3	Vibration	10g rms (15 degree 2KHz)
2.4	Humidity	100% RH at 35c, 95%RH at 40°C
2.5	Shock	20G for 11msc

3.0	Electrical Specifications	
3.1	Frequency Range	DC-26.5GHz
3.2	Average Power	10W
3.3	VSWR	1.10-1.20:1
3.4	Peak Power	0.5KW

PAGE 1 OF 1	DATE MAY 6 <sup>th</sup> 2000
<small>PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY.</small>  <b>RFST10G26V Termination</b> <a href="http://www.rflambda.com">www.rflambda.com</a>	DESIGN RFPC
	RF-LAMBDA RFPC
	CAD MODEL REVISION 10
	ASSEMBLY REVISION V552
	ASSEMBLY NAME RFLVR07
DRAWING NUMBER De5A	
RF-LAMBDA	SIZE LT SHEETS 1 OF 1