


# SMA Type DC-26.5GHz 25W TERMINATION


--- RFST25G26S

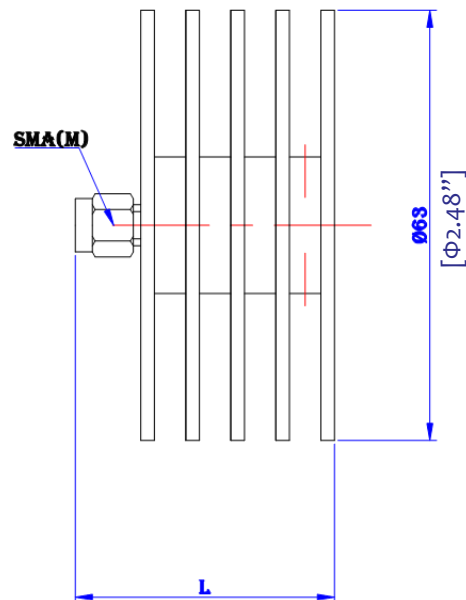

1.0	Mechanical Specifications	
1.1	Coaxial Connector	SMA-male
1.2	External Body Finish	Body painted black epoxy enamel
1.3	Weight	130g

2.0	Environment specifications	
2.1	Operation Temp.	-50°C~+120°C (case temp.)
2.2	Storage Temp.	-55°C~+125°C
2.3	Vibration	10g rms (15 degree 2KHz)
2.4	Humidity	100% RH at 35c, 95%RH at 40°C
2.5	Shock	20G for 11msc

3.0	Electrical Specifications	
3.1	Frequency Range	DC-26.5GHz
3.2	Average Power	25w
3.3	VSWR	1.15-1.30:1
3.4	Peak Power	0.5KW

PAGE 1 OF 1	DATE MAY 6 <sup>th</sup> 2000
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY.	DESIGN RFPC
 <b>RFST25G26S</b> Termination	RF-LAMBDA RFPC
www.rflambda.com	CAD MODEL REVISION 10
RF-LAMBDA	ASSEMBLY REVISION V552
SIZE LT	ASSEMBLY NAME RFLVR07
SHEETS 1 OF 1	DRAWING NUMBER De5A