


# 2.92mm DC-40GHz 20W TERMINATION

## --- RFST20G40K

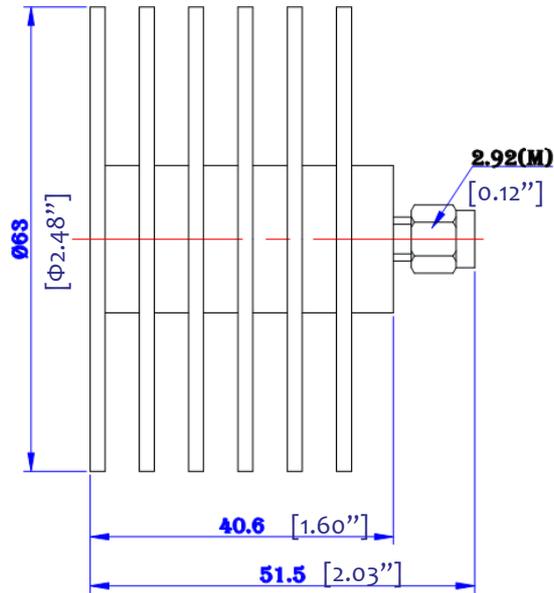

1.0 Mechanical Specifications		
1.1	Coaxial Connector	2.92mm
1.2	External Body Finish	Body painted black epoxy enamel
1.3	Weight	135g

2.0 Environment specifications		
2.1	Operation Temp.	-50°C~+120°C (case temp.)
2.2	Storage Temp.	-55°C~+125°C
2.3	Vibration	10g rms (15 degree 2KHz)
2.4	Humidity	100% RH at 35c, 95%RH at 40°C
2.5	Shock	20G for 11msc

3.0 Electrical Specifications		
3.1	Frequency Range	DC-40GHz
3.2	Average Power	20W
3.3	VSWR	1.20-1.35:1
3.4	Peak Power	0.2 KW

PAGE 1 OF 1	DATE MAY 6 <sup>th</sup> 2000
<small>PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY.</small>	
 <b>RFST20G40K Termination</b>	
www.rflambda.com	
RF-LAMBDA	SIZE LT SHEETS 1 OF 1