



RF-LAMBDA

The power beyond expectations

RFHB75M02GPI




0.75-1.5GHz Broadband 180° Hybrid

Summary:

- . High power operational up to 50W CW
- . Small compacted package
- . Wide bandwidth, flat frequency response
- . MIL-E-5400 standard

Electrical and Environmental Specification

Frequency Range:	0.75-1.5GHz
Insertion Loss:	0.3dB
Isolation:	22dB
Amplitude Unbalance:	± 0.5dB
Phase unbalance:	± 10.0 degree
Power:	50W CW
VSWR:	1.25 : 1
Operational Temp. Range:	-55°C~+85° C
Storage Temp. Range:	-55°C~+100° C

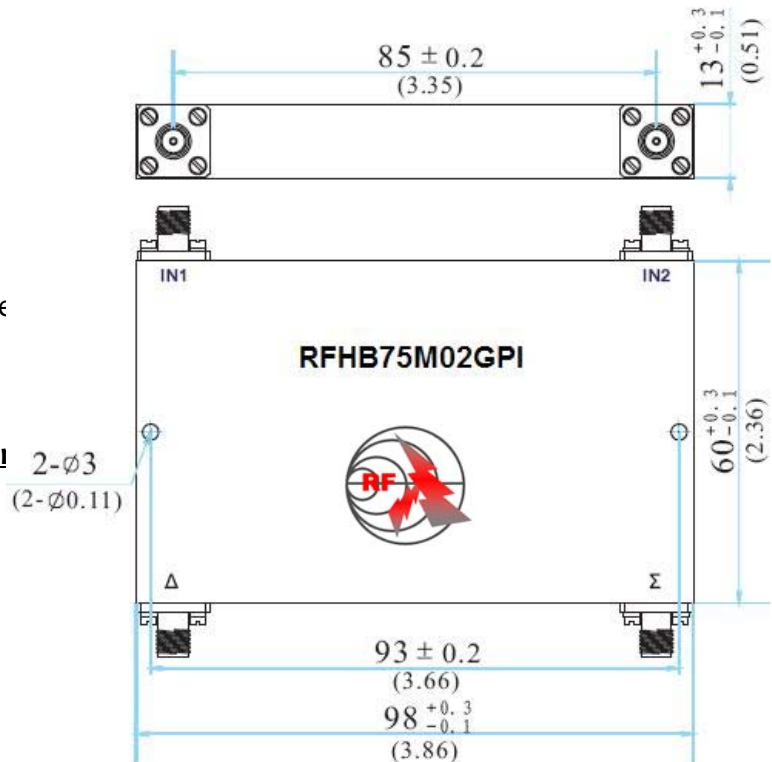

Coaxial 50W 0.75-1.5GHz 180° Hybrid

