


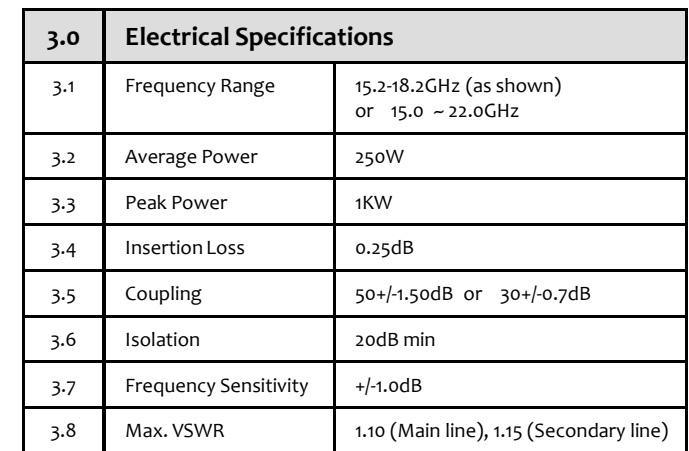

2.0	Environment specifications	
2.1	Operation Temp.	-30°C~+60°C
2.2	Storage Temp.	-50°C~+125°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

PAGE 1 OF 1		DATE Apr 20 th 2007	
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY		DESIGN RFPC RF-LAMBDA RFPC	
 RWQCP515B WAVEGUIDE COUPLER		CAD MODEL REVISION 19-CD ASSEMBLY REVISION V552-D ASSEMBLY NAME RFLVR16 DRAWING NUMBER	
www.rflambda.com		D0341	
RF-LAMBDA		SIZE LT	SHEETS 1 OF 1