


WAVEGUIDE WR28 HIGH DIRECTIVITY DIRECTIONAL COUPLER- RWGCP28SE

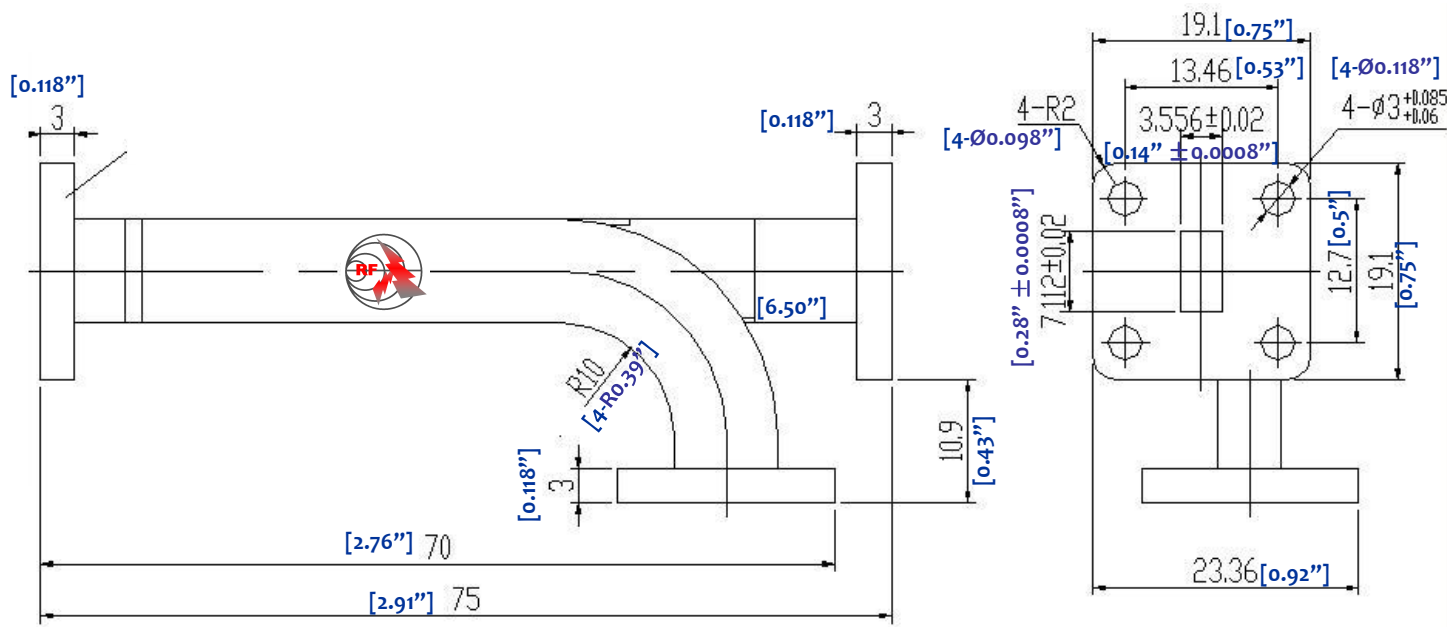

3.0 Electrical Specifications		
3.1	Frequency Range	34.25~35.75GHz
3.2	Coupling	25dB
3.3	Directivity	25dB min
3.4	VSWR	1.15
3.5	Insertion Loss	0.2dB max.
3.6	Average Power	50W

1.0 Mechanical Specifications		
1.1	Waveguide type	Rectangular Waveguide WR28
1.2	Flange type	CPRG, CPRF, COVER, CHOKE available
1.3	Flange Holes	Through
1.4	Basis-material	Cuprum
1.5	Internal Body Finish	Silver Plated chromate or conversion
1.6	External Body Finish	Body painted with gray/black epoxy enamel

2.0 Environment specifications		
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-60°C~+125°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

PAGE OF		DATE	Apr 19 th 2007
<p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITINGS BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY</p> <p>RWGCP28SE WAVEGUIDE COUPLER</p> <p>www.rflambda.com</p>		DESIGN	RFPC
		RF-LAMBDA	RFPC
		CAD MODEL REVISION	0-4
		ASSEMBLY REVISION	VS2D5
		ASSEMBLY NAME	RFLVR011
		DRAWING NUMBER	D02-1
RF-LAMBDA		SIZE	LT
		SHEETS	1 OF 1