

Q-Band Power Amplifier, 43 to 46 GHz, 30 dB Gain, +29 dBm P_{1dB}

Description:

Model SBP-4334633029-2222-S1 is a power amplifier with a nominal small signal gain of 30 dB and a nominal P_{1dB} of +29 dBm across the frequency range of 43 to 46 GHz. The DC power requirement for the amplifier is +8 V_{DC}/2.5 A. The mechanical configuration offers a right angle structure with WR-22 waveguides and UG-383/U flanges. Other port configurations, such as an in line structure with WR-22 waveguides or 2.4 mm connectors, are also available under different model numbers.



Features:

- High Output Power
- High Gain

Applications:

- Radar Systems
- Communication Systems
- Test Equipment



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	43 GHz		46 GHz
Gain		30 dB	
P _{1dB}		+29 dBm	
P _{SAT}		+31 dBm	
P _{in}			+5 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage	+7 V _{DC}	+8 V _{DC}	+9 V _{DC}
DC Supply Current		2.5 A	
Specification Temperature		+25 °C	
Case Temperature	0 °C		+50 °C

Mechanical Specifications:


Item	Specification
Input Port	WR-22 Waveguide with UG-383/U Flange
Output Port	WR-22 Waveguide with UG-383/U Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	2.0 Oz
Size	1.20" (W) X 2.60" (L) X 0.50" (H)
Outline	BG-SQ-1

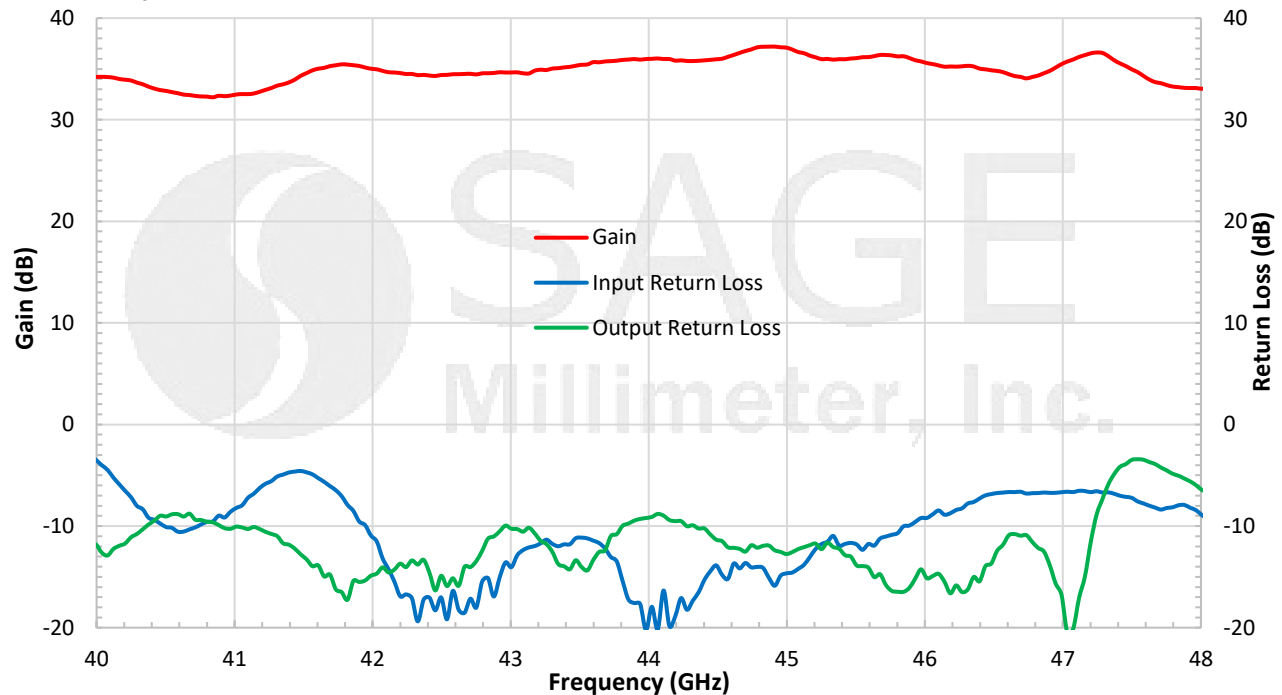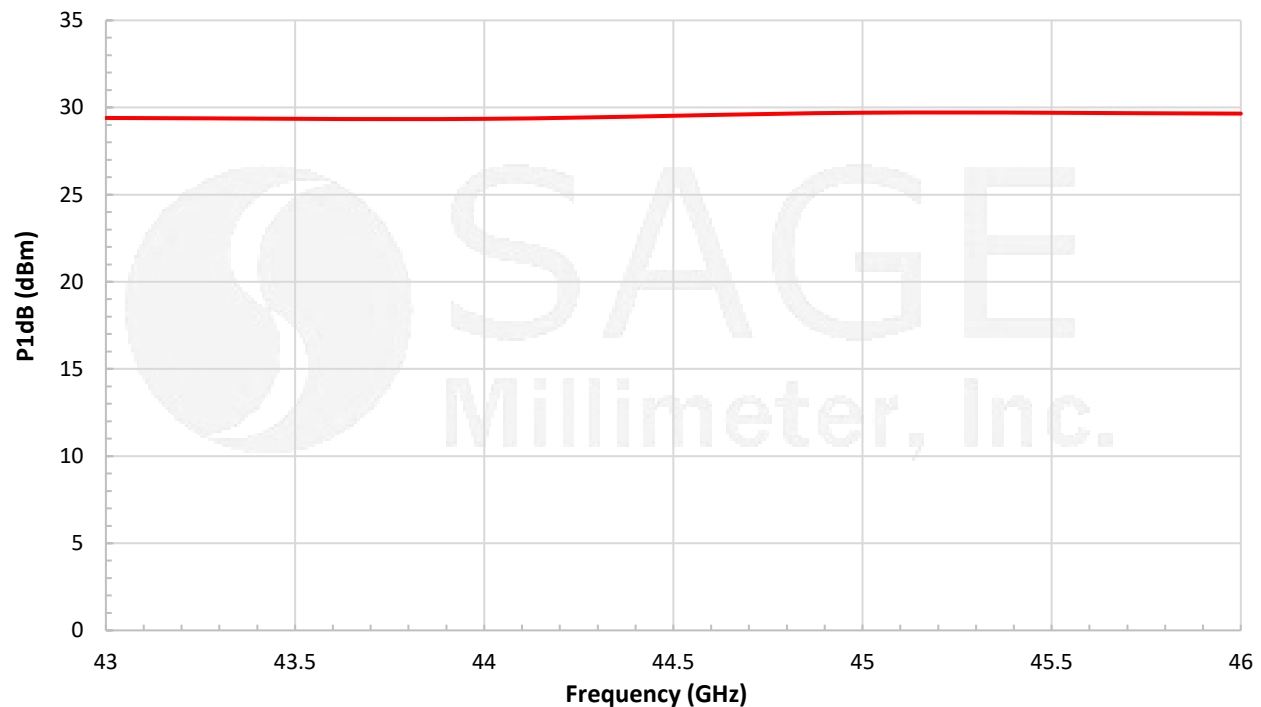

**Q-Band Power Amplifier, 43 to 46 GHz, 30 dB Gain, +29 dBm P_{1dB}****Typical Gain and Return Loss vs. Frequency**Bias: +8 V_{DC}/2.5 A**Typical P_{1dB} vs. Frequency**Bias: +8 V_{DC}/2.5 A

Q-Band Power Amplifier, 43 to 46 GHz, 30 dB Gain, +29 dBm P_{1dB}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

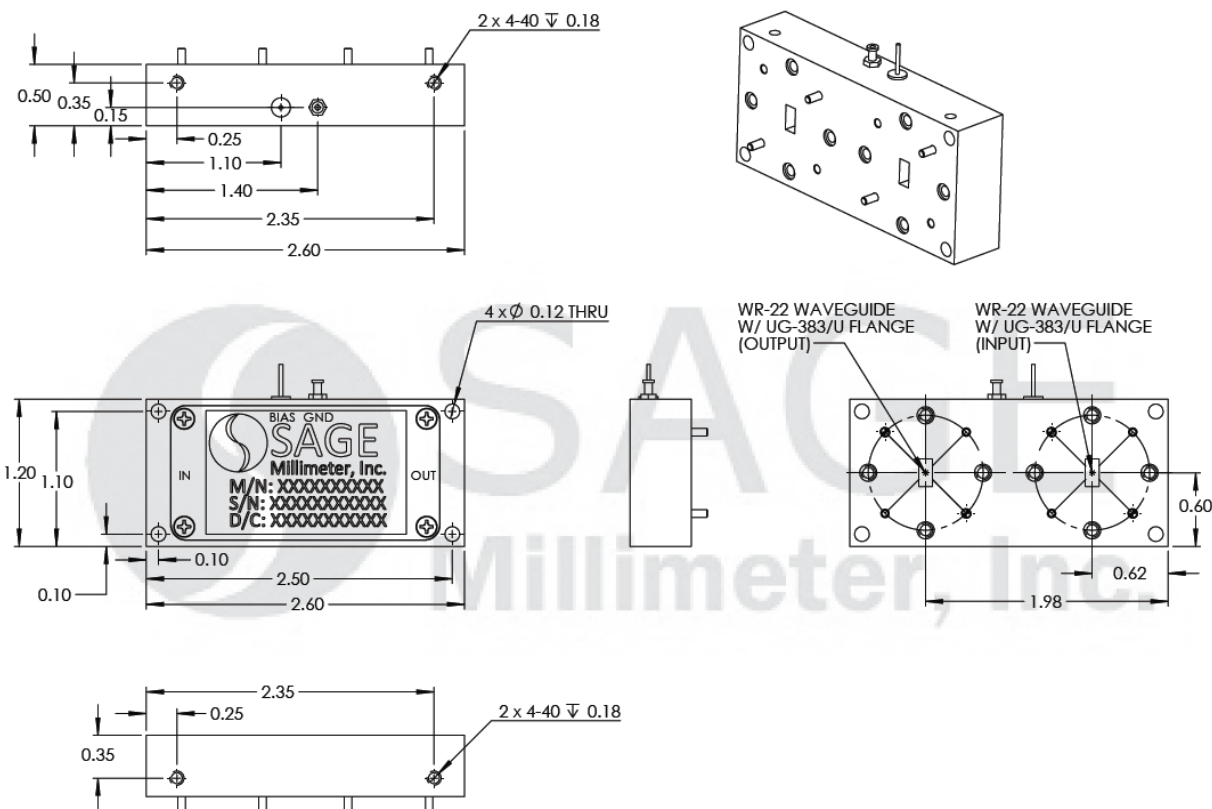

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +35 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50°C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.