

Low Noise Amplifier, 21 to 40 GHz, 30 dB Gain, 3 dB NF

Description:

Model SBL-2134033030-KFKF-S1 is a low noise amplifier with a typical small signal gain of 30 dB and a nominal noise figure of 3 dB across the frequency range of 21 to 40 GHz. The DC power requirement for the amplifier is +6 V_{DC}/160 mA. The input and output port configurations are both female K connectors. Other port configurations are available under different model numbers.



Features:

- Broadband Operation
- State-of-the-Art Noise Figure
- High Gain and Good Gain Flatness

Applications:

- Radar Systems
- Communication Systems
- Low Noise Receivers

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	21 GHz		40.0 GHz
Gain		30 dB	
Noise Figure		3 dB	
P _{in}			-20 dBm
Output P _{1dB}		+10 dBm	
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage	+5.5 V _{DC}	+6 V _{DC}	+15 V _{DC}
DC Supply Current		160 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:


Item	Specification
Input Port	K(F)
Output Port	K(F)
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.3 Oz
Size	1.20" (W) X 1.20" (L) X 0.50" (H)
Outline	BG-SC-1






Low Noise Amplifier, 21 to 40 GHz, 30 dB Gain, 3 dB NF

Typical Gain and Return Loss vs. Frequency

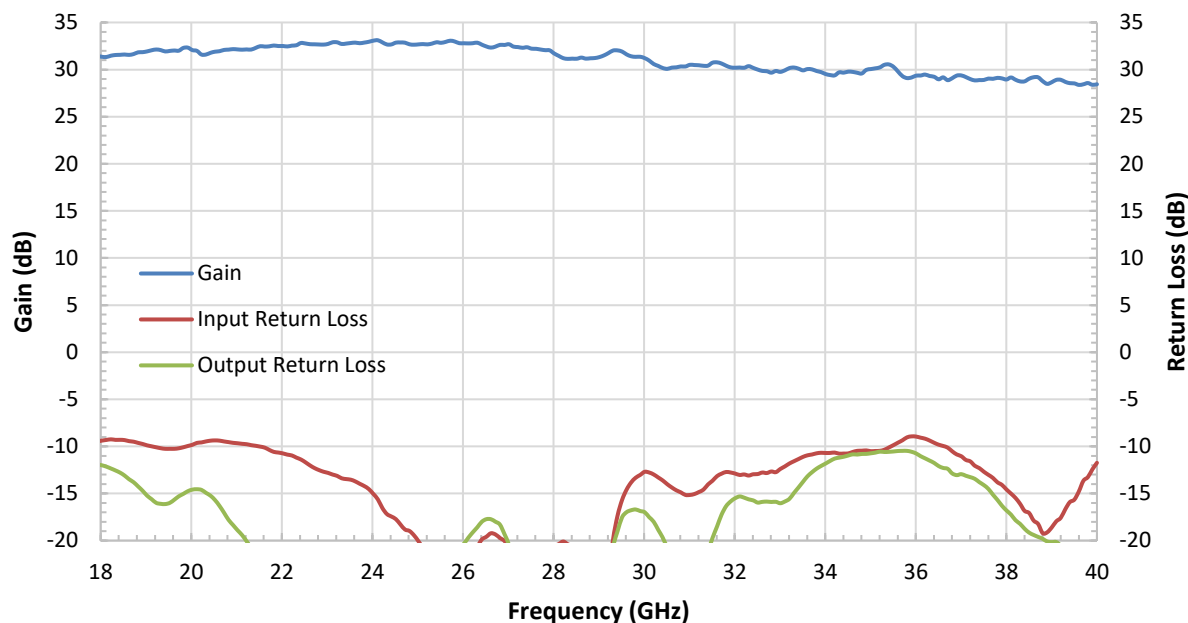Bias: +6 V_{DC}/160 mA


Typical Noise Figure vs. Frequency

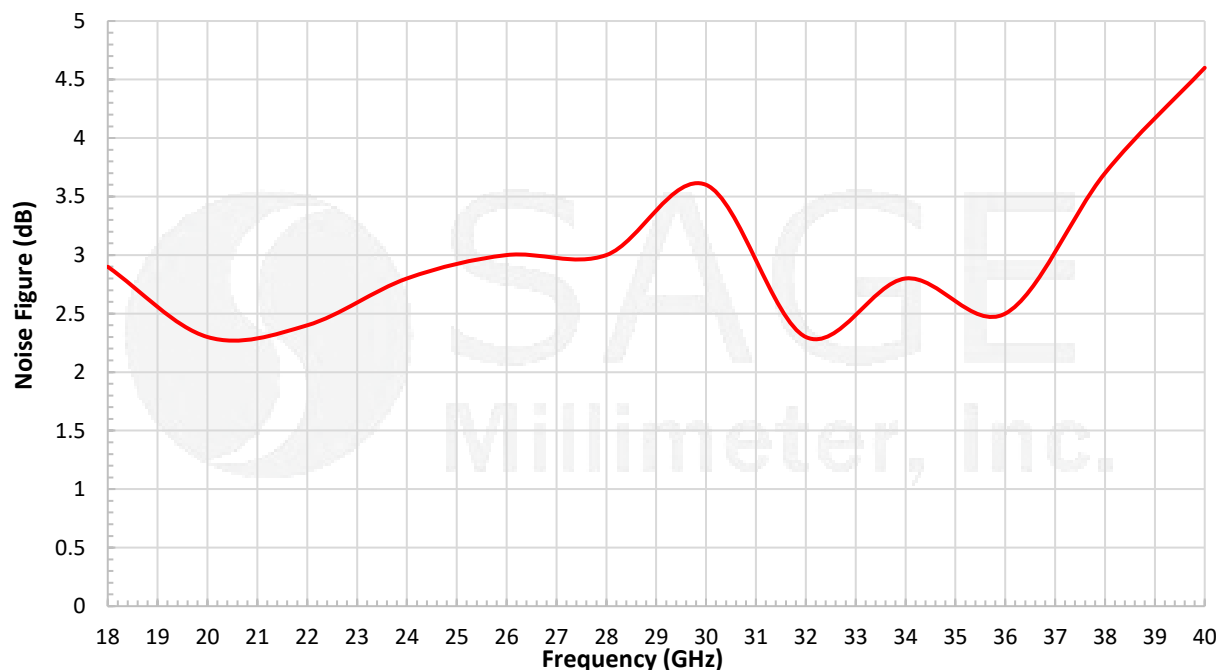Bias: +6 V_{DC}/160 mA


Low Noise Amplifier, 21 to 40 GHz, 30 dB Gain, 3 dB NF

Typical Output Power vs. Frequency

Bias: +6 V_{DC}/160 mA

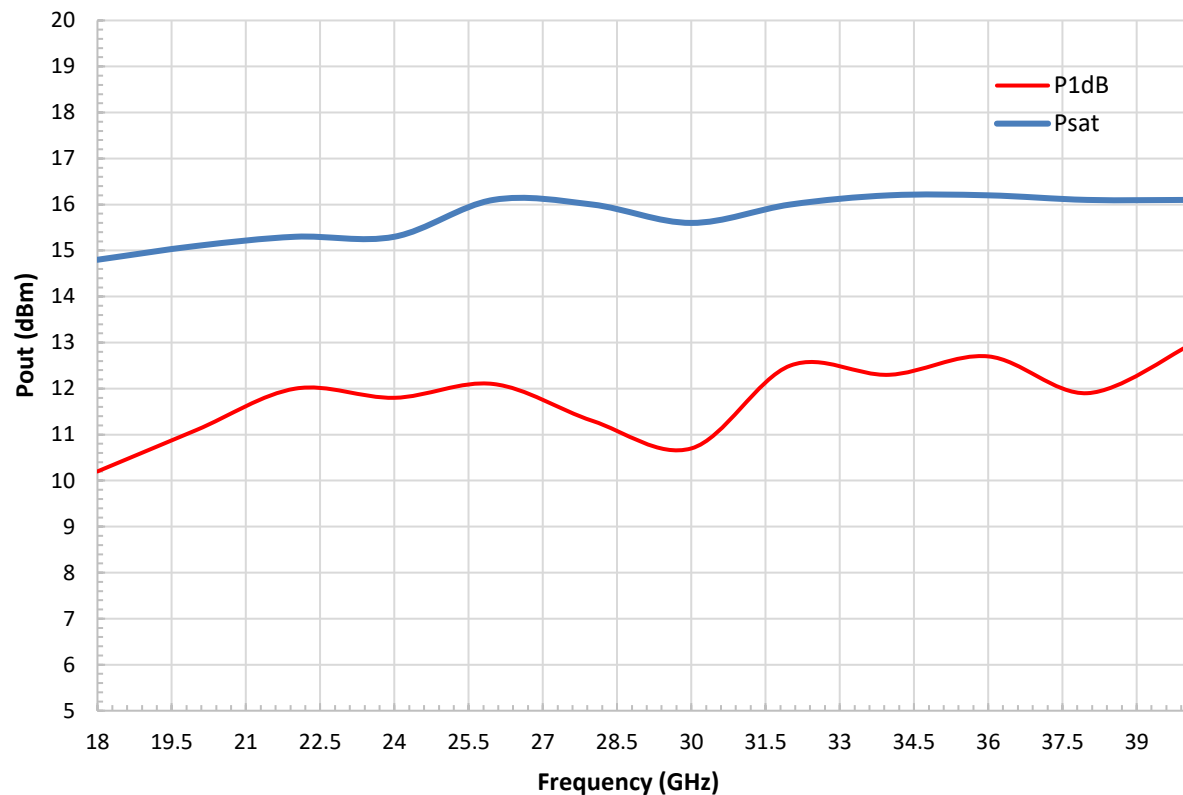

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

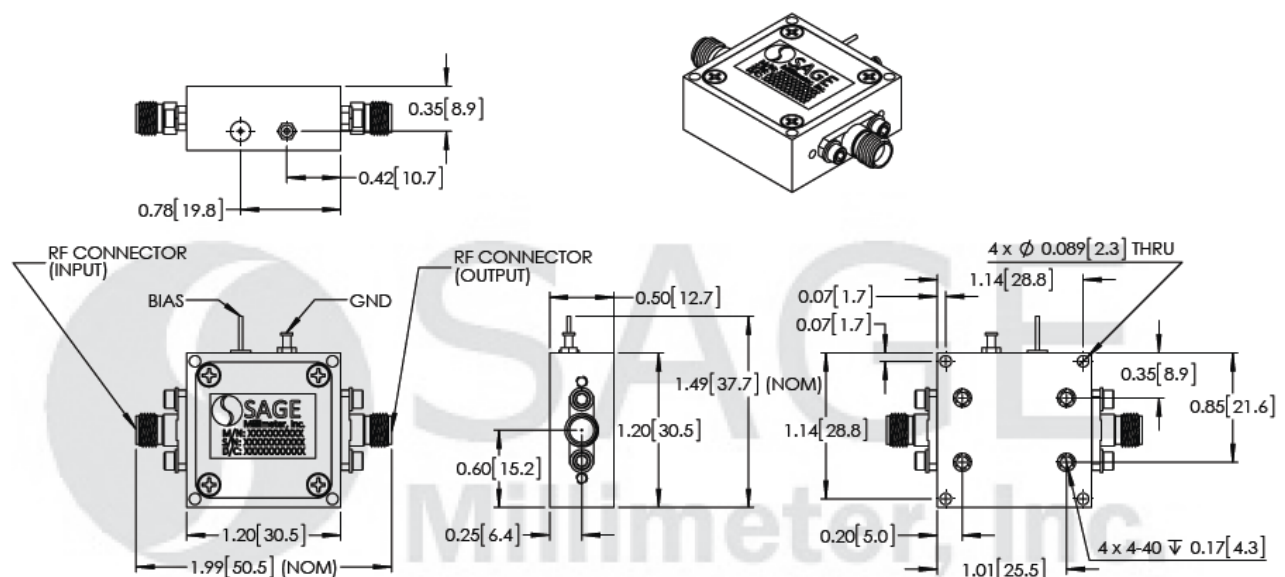



Low Noise Amplifier, 21 to 40 GHz, 30 dB Gain, 3 dB NF

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50°C. Use proper heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

