

COMPACT, MODULAR BLOCK UPCONVERTERS



C-, X-, Ku-, DBS-, AND Ka-BANDS



Ku-, DBS- and Ka-Band Models



C- and X-Band Models

FEATURES

- Small size: 3.5" [88.9 mm] x 5.0" [127 mm] x 1.36" [34.54 mm]
- 32 dB attenuation control
- 10 MHz reference input on RF input or external reference input connector
- Analog and RS-485 remote control
- RF output power detector
- Mute for external command or excess output power
- Low phase noise

This series of block upconverters are ideal for use in modular systems where small size and high performance are required. Status and control can be accomplished either by discrete lines for existing controllers or by RS-485.

INPUT FREQUENCY (GHz)	OUTPUT FREQUENCY (GHz)	LO FREQUENCY (GHz)	MODEL NUMBER
0.95 to 1.75	5.85 to 6.65	4.9	UPBA-6.25
0.95 to 1.45	7.9 to 8.4	6.95	UPBA-8.15
0.95 to 1.45	12.75 to 13.25	11.8	UPBA-13
0.95 to 1.45	14 to 14.5	13.05	UPBA-14.25-1
0.95 to 1.7	13.75 to 14.5	12.8	UPBA-14.125-1

DBS- AND Ka-BAND MODELS

0.95 to 2.05	17.3 to 18.4	16.35	UPBA-17.85
0.95 to 1.2	28.35 to 28.6	27.4	UPBA-28.475-1
0.95 to 1.2	29.25 to 29.5	28.3	UPBA-29.375-1
1 to 2	29 to 30	28	UPBA-29.5-1
0.95 to 1.7	29.25 to 30	28.3	UPBA-29.625-1
0.95 to 1.45	29.5 to 30	28.55	UPBA-29.75-1
1 to 2	30 to 31	29	UPBA-30.5-1



COMPACT, MODULAR BLOCK UPCONVERTERS

SPECIFICATIONS	BLOCK UPCONVERTER
Type	Single conversion
Frequency sense	No inversion
Input characteristics	
Impedance	50 ohms
VSWR	1.25:1 maximum
Non-damage	+15 dBm minimum
External reference characteristics	
Location	Input center conductor or reference connector
Frequency	10 MHz
Level	-5 dBm to +7 dBm
Output characteristics	
Impedance	50 ohms
VSWR	1.25:1 maximum
Power output (1 dB compression)	+13 dBm minimum at minimum attenuation
Ka-Band models	+15 dBm minimum at minimum attenuation
Transfer characteristics	
Noise figure	15 dB typical at minimum attenuation
Gain	26 ±1 dB at 23 °C
Gain flatness	±0.2 dB/any 40 MHz, ±0.25 dB/any 80 MHz, ±0.5 dB/RF-Band
Gain stability	
Constant temperature	±0.25 dB/24 hours
-40 °C to +80 °C	2 dB maximum after 1/2 hour warm-up
Attenuation control	32 dB/0.1 dB step remote control or 0 volts to 10 volts DC
Group delay	
Slope (any 80 MHz segment)	0.0125 ns/MHz
Parabolic (any 80 MHz segment)	0.000625 ns/MHz ²
Ripple (any 80 MHz segment)	0.5 ns
Total	1 ns peak-to-peak over RF-Band
Spurious output	
Signal-related	65 dBc minimum
IF signal second harmonic	
(DBS- and Ka-Band models)	60 dBc maximum at 0 dBm output power
Signal-independent (in-band)	-100 dBm maximum
Signal-independent (out-of-band)	-70 dBm maximum
Image rejection	60 dB minimum
Second harmonic output (P1 dB)	-40 dBc maximum
Intermodulation distortion (third-order)	With two in-band output signals at 0 dBm, third-order intermodulation products are less than 46 dBc
Mute	60 dB minimum
Maximum phase noise	See table on the next page
Output power monitor	See table on the next page
Control/monitor	Discrete analog and RS-485 provided, refer to L3 Narda-MITEQ Technical Note 25T058 for details.

Note: All specifications guaranteed at maximum gain unless otherwise noted.

MAXIMUM PHASE NOISE

LOCAL OSCILLATOR (dBc/Hz)


OFFSET (Hz)	10 MHz	BELOW 10 GHz	ABOVE 10 GHz	ABOVE 27 GHz
10	-113	-51	-45	-34
100	-135	-73	-67	-64
1K	-145	-83	-77	-74
10K	-150	-93	-87	-84
100K	-150	-103	-97	-94
1M	-150	-103	-97	-104

OUTPUT POWER MONITOR

DC VOLTAGE BASED ON OUTPUT LEVEL TYPICAL

Output Power (dBm)	Monitor Level (VDC)
13	0.85 to 1.50
10	0.60 to 0.84
7	0.38 to 0.59
3	0.12 to 0.28
No input signal	0.01 maximum

REPRESENTATIVE BLOCK DIAGRAM

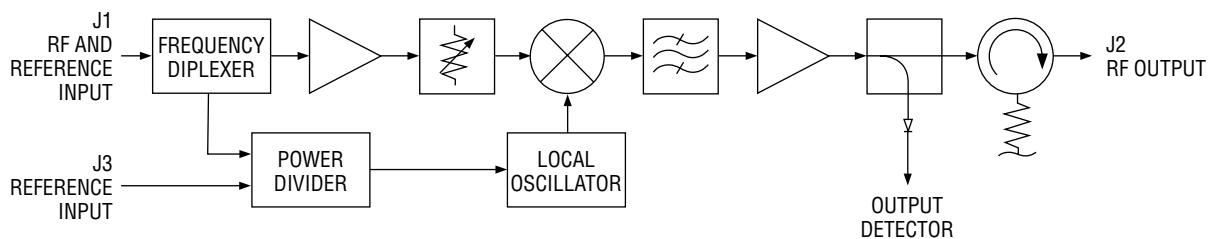

GENERAL SPECIFICATIONS

PRIMARY POWER REQUIREMENTS

Voltage.....	12 VDC to 15 VDC
Voltage ripple/noise	50 mV peak-to-peak, typical (20 MHz BW)
Current.....	650 mA typical, 1A maximum
Ka-Band models.....	1.3A typical, 1.6A maximum

PHYSICAL

Weight.....	1.5 lb. [0.68 kg] nominal
Connectors	
RF	SMA female
RF (Ka-Band).....	2.92 mm female
Power/monitor and control interface.....	15 pin D-type male

ENVIRONMENTAL

Operating


Ambient temperature.....	-40 °C to +60 °C
Relative humidity.....	Up to 95% at 30 °C
Atmospheric pressure	Up to 10,000 feet

Nonoperating

Ambient temperature.....	-40 °C to +85 °C
Relative humidity.....	Up to 95% at 40 °C
Atmospheric pressure	Up to 50,000 feet
Shock.....	30 g's, 10 rms
Vibration.....	20 Hz to 2000 Hz random to 0.04 G²/Hz

COMPACT, MODULAR BLOCK UPCONVERTERS

OUTLINE DRAWINGS

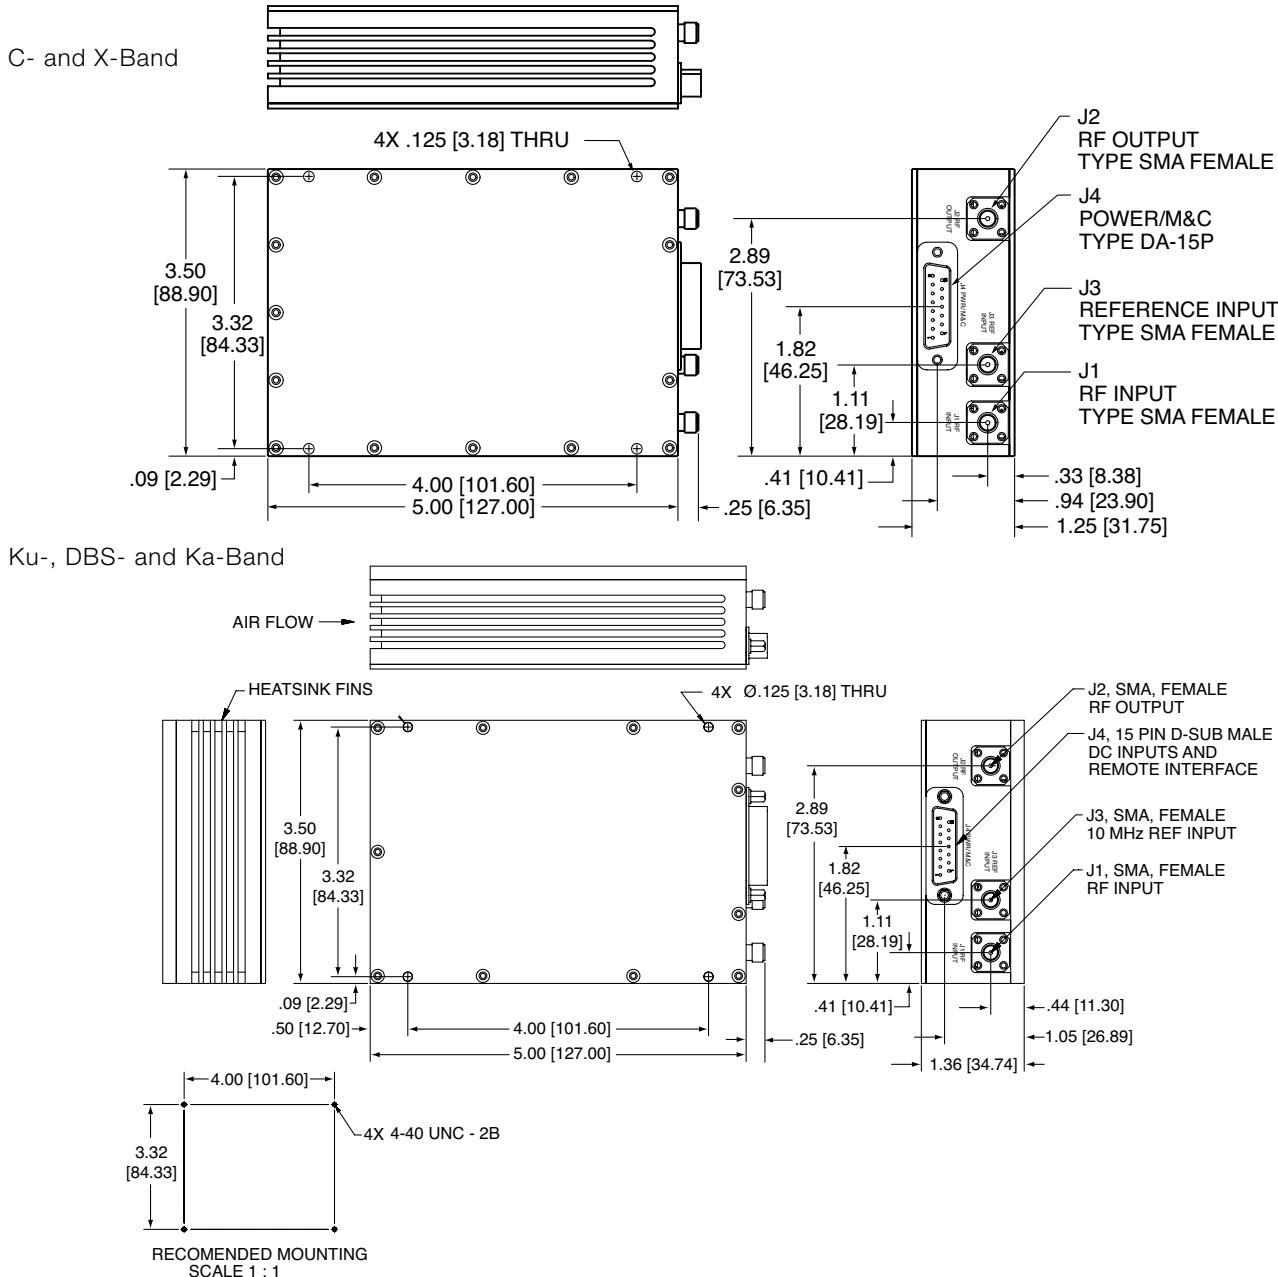

Note: Dimensions shown are in inches and those shown in brackets [] are in millimeters.

narda  **MITEQ**

435 Moreland Road

Hauppauge, NY 11788

Tel: 631-231-1700

Fax: 631-231-1711

Email: satcomsalesnm@L3T.com

www.nardamiteq.com

The material presented in this datasheet was current at the time of publication. L3 Narda-MITEQ's continuing product improvement program makes it necessary to reserve the right to change our mechanical and electrical specifications without notice. If either of these parameters is critical, please contact the factory to verify that the information is current.

This material consists of L3 Narda-MITEQ general capabilities information and does not contain controlled technical data as defined within the International Traffic in Arms (ITAR) Part 120.10 or Export Administration Regulations (EAR) Part 734.7-11.
D-301F/08.30.17