


V Band, X4 Active Frequency Multiplier, 45 to 70 GHz, +16 dBm P_{out}

Description:

Model SFA-453703416-15SF-E1 is an active X4 frequency multiplier. The multiplier has an input frequency of 11.25 to 17.50 GHz with a typical input power of +5 dBm and an output frequency of 45 to 70 GHz. The typical output power is +16 dBm. The multiplier also has a typical harmonic suppression of -20 dBc. The DC power requirement for the multiplier is +8 V_{DC}/600 mA. The input port configuration is a female SMA connector and the output is a WR-15 waveguide with a UG-385/U anti-cocking flange. Other port configurations are available under different model numbers.

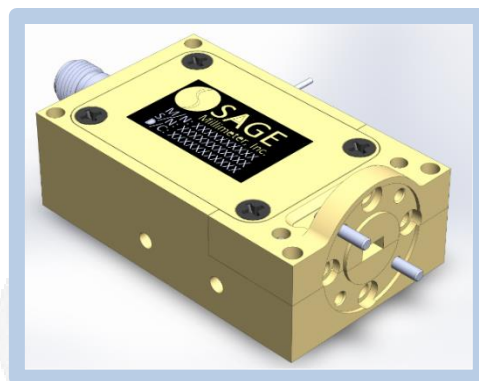

Features:

- Broadband Coverage
- High Output Power
- Low Harmonic Emission

Applications:

- IEEE 802.11ab WiGig
- Frequency Extenders
- Source Modules
- Communication Systems



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Input Frequency	11.25 GHz		17.50 GHz
Input Power		+5 dBm	+20 dBm
Output Frequency	45.0 GHz		70.0 GHz
Output Power		+16 dBm	
Harmonic Suppression		-20 dBc	
Spurious		-60 dB	
Port Return Loss		10 dB	
DC Voltage	+6 V _{DC}	+8 V _{DC}	+15 V _{DC}
DC Supply Current		600 mA	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

Mechanical Specifications:


Item	Specification
Input	SMA (F)
Output	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	1.10" (W) x 1.80" (L) x 0.75" (H)
Outline	FA-SV-2CW-A-1.8

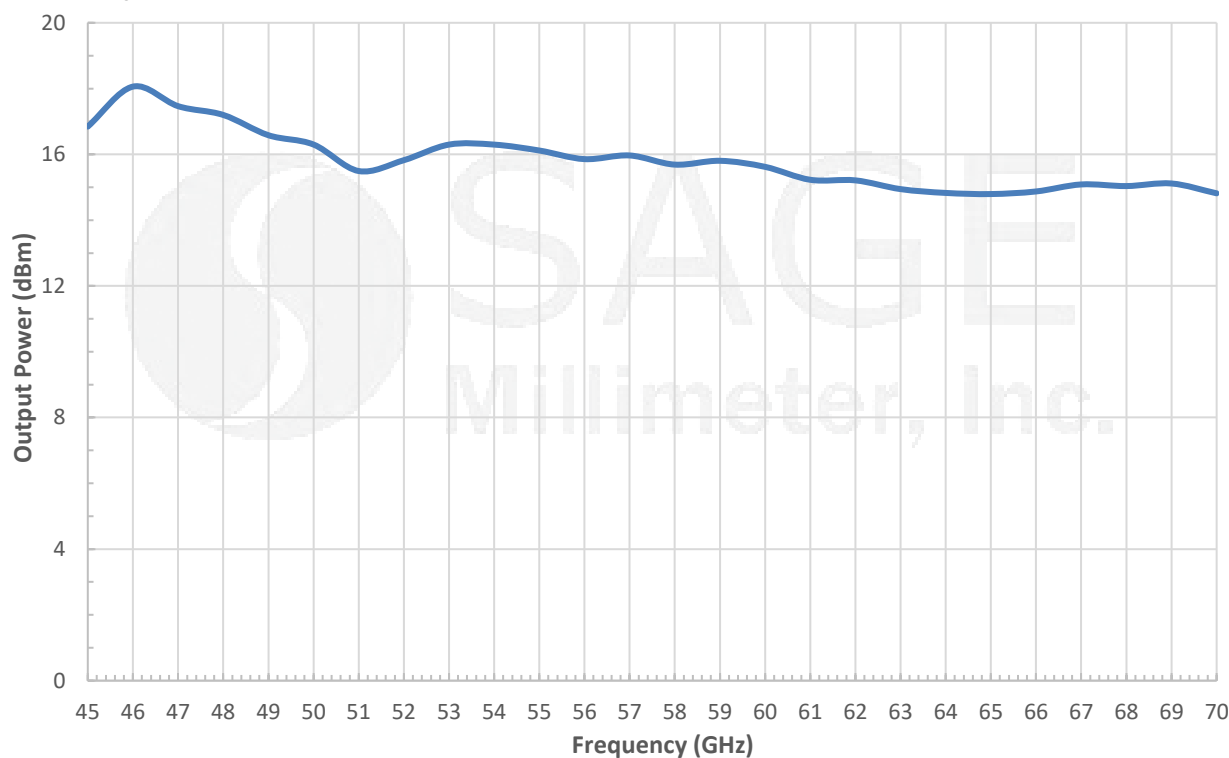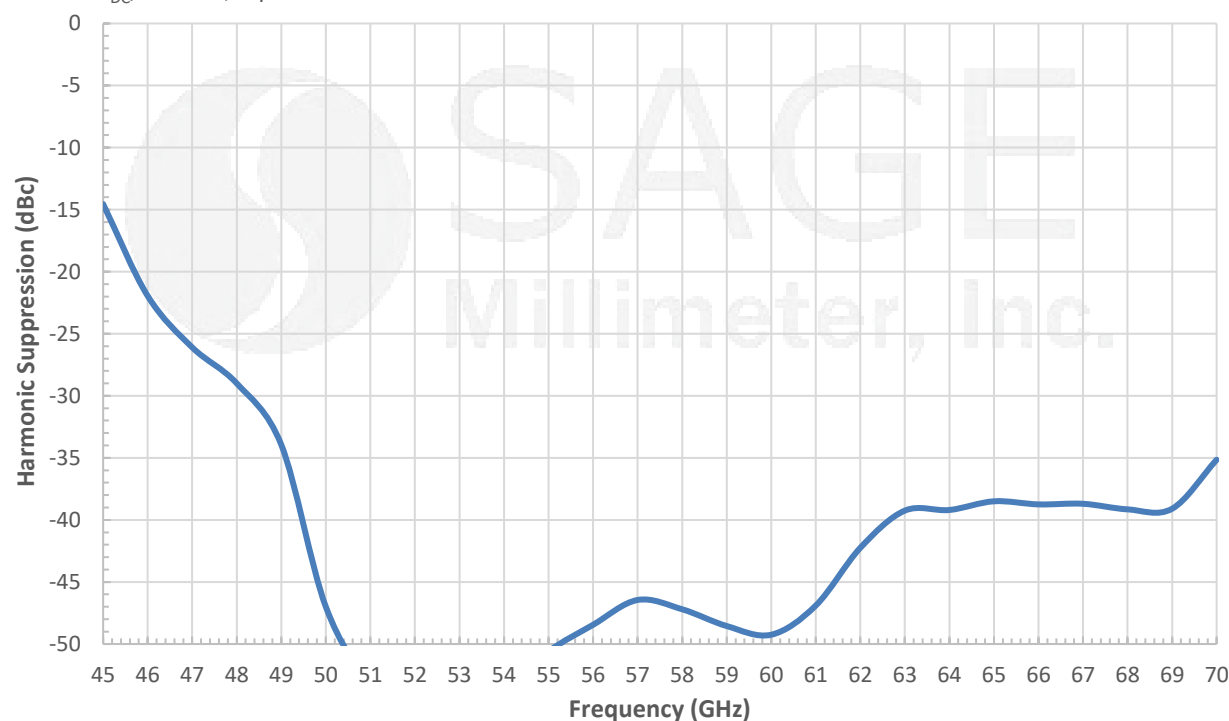

**V Band, X4 Active Frequency Multiplier, 45 to 70 GHz, +16 dBm P_{out}** **Typical Output Power vs. Frequency**Bias: +8V_{DC}/700 mA; Input Power: +5 dBm**Typical Harmonic Suppression vs. Frequency**Bias: +8V_{DC}/700 mA; Input Power = +5 dBm

V Band, X4 Active Frequency Multiplier, 45 to 70 GHz, +16 dBm P_{out}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

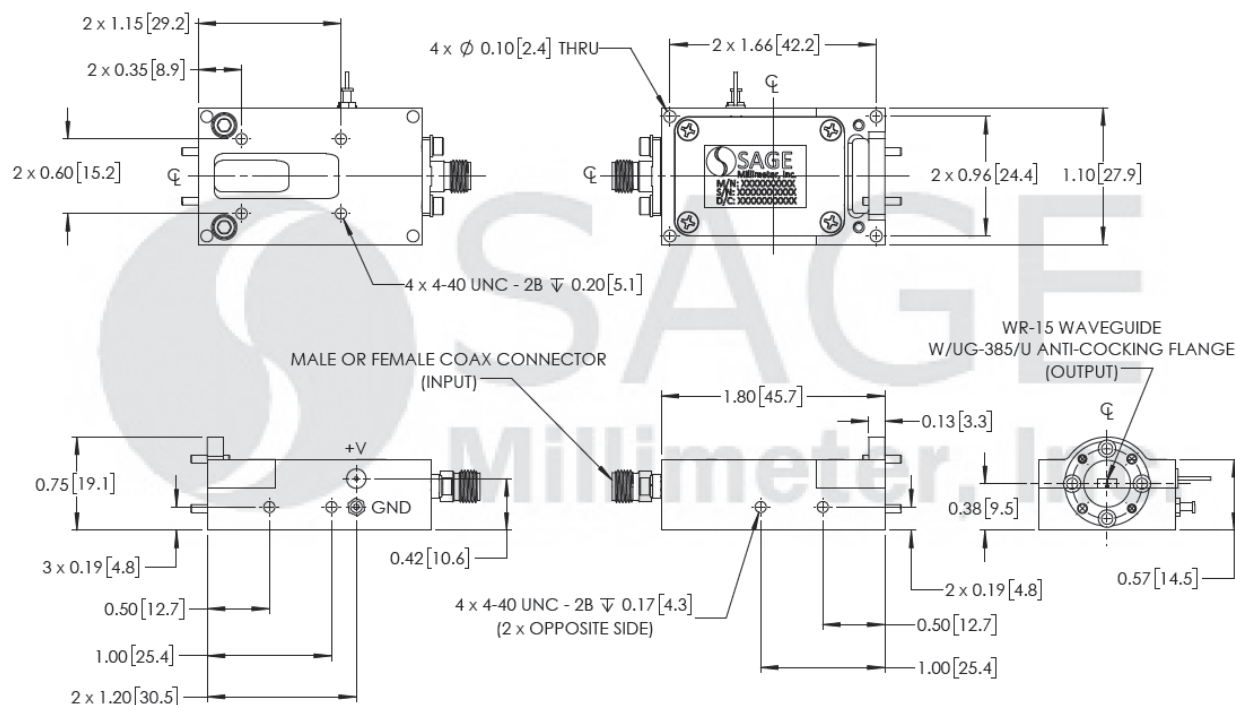

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**