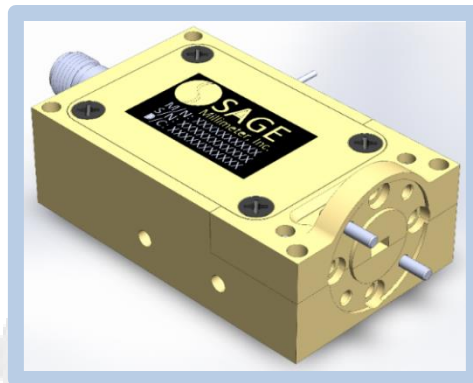


E-Band, X6 Active Frequency Multiplier, 70 to 86 GHz, +10 dBm P_{out}**Description:**

Model SFA-703863610-12SF-E1 is an active X6 frequency multiplier. The multiplier has an input frequency of 11.66 to 14.33 GHz with a typical input power of 0 dBm and an output frequency of 70 to 86 GHz with a typical output power of +10 dBm. The multiplier also has a typical harmonic suppression of -20 dBc. The DC power requirement for the multiplier is +8 V_{DC}/280 mA. The input port configuration is a female SMA connector and the output is a WR-12 waveguide with a UG-387/U anti-cocking flange. Other port configurations are available under different model numbers.

**Features:**

- Low Harmonic Emission
- Broad Band Coverage
- High Output Power

Applications:

- Frequency Extenders
- Source Modules
- Communication Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Input Frequency	11.66 GHz		14.33 GHz
Input Power		0 dBm	+20 dBm
Output Frequency	70 GHz		86 GHz
Output Power		+10 dBm	
Harmonic Suppression		-20 dBc	
Spurious		-60 dBc	
Port Return Loss		10 dB	
DC Voltage	+5 V _{DC}	+8 V _{DC}	+12 V _{DC}
DC Supply Current		280 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:


Item	Specification
Input Port	SMA (F)
Output Port	WR-12 Waveguide with UG-387/U Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	1.10" (W) x 1.80" (L) x 0.75" (H)
Outline	FA-SE-2CW-A-1.8




E-Band, X6 Active Frequency Multiplier, 70 to 86 GHz, +10 dBm P_{out}

Typical Output Power vs. Frequency

Bias: +8 V_{DC}/280 mA, Input Power: +0 dBm

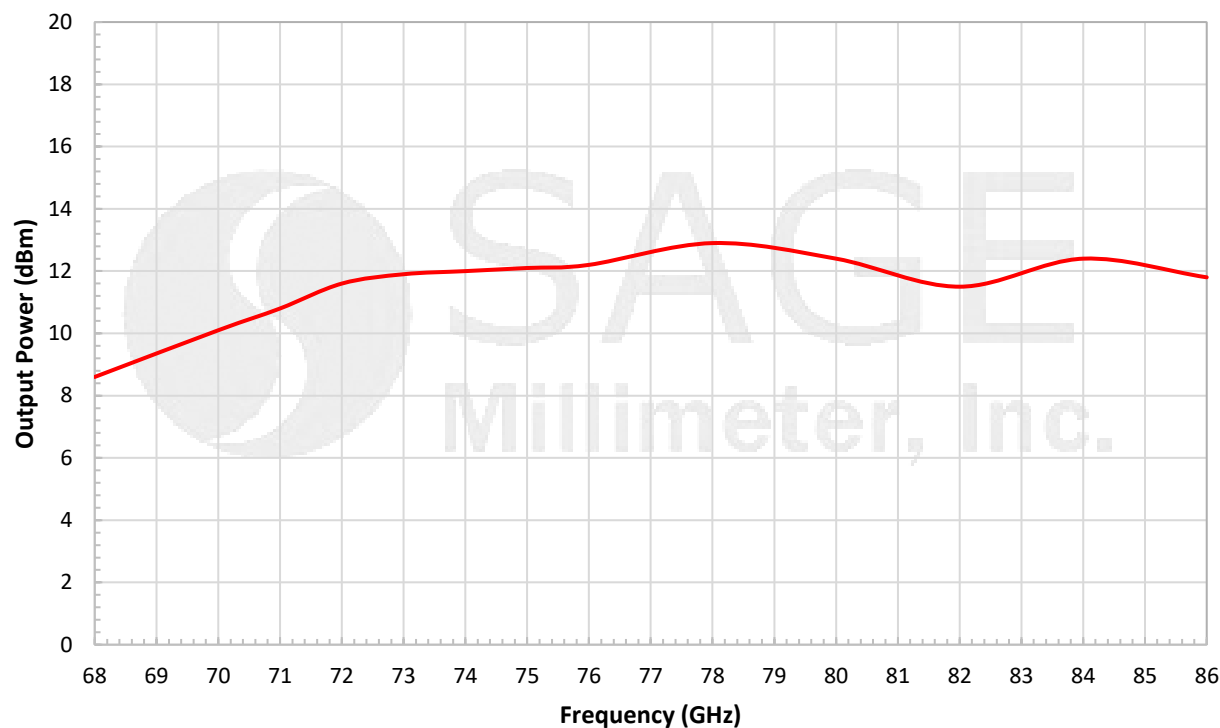

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

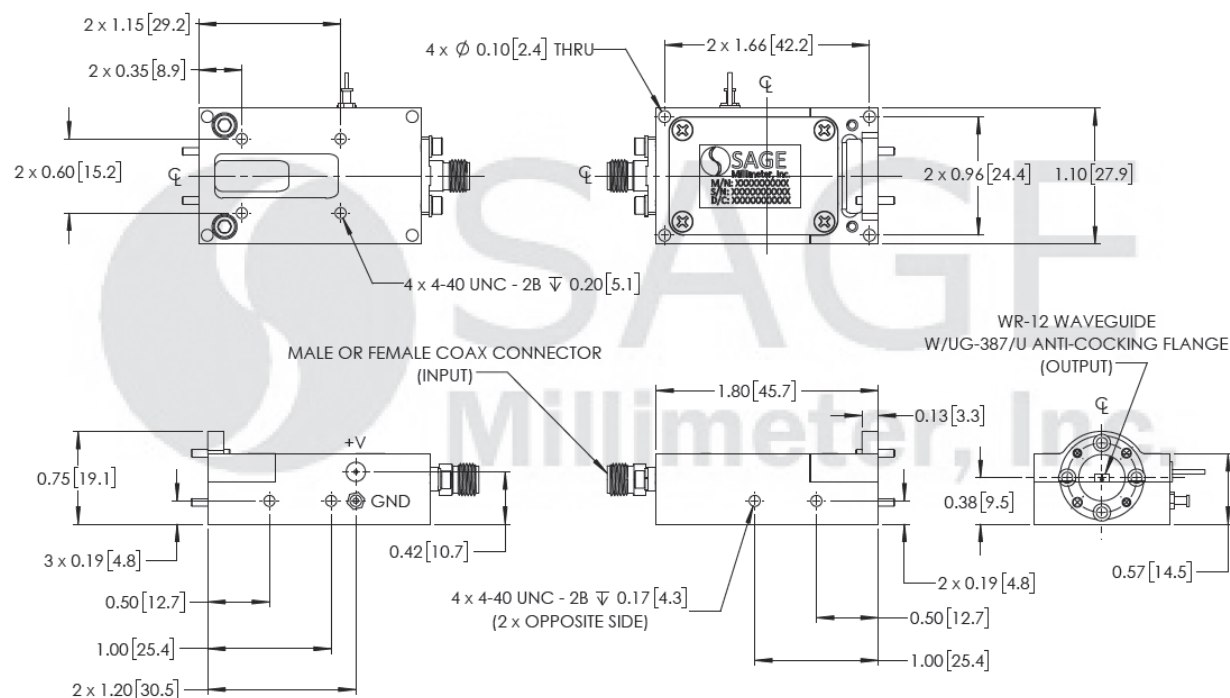

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com



E-Band, X6 Active Frequency Multiplier, 70 to 86 GHz, +10 dBm P_{out}

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

