

F-Band Externally Biased Balanced Mixer

Description:

Model SFB-08-E2 is an F-Band, externally biased balanced mixer. The mixer supports the full waveguide band operation for both LO and RF frequencies from 90 to 140 GHz with an extremely broad IF output from DC to 20 GHz. The mixer offers a typical conversion loss of 13 dB and a high RF to LO port isolation. The main advantage of using an externally biased mixer is that it only requires a local oscillator (LO) power of 0 to +5 dBm when a bias of +5 V_{DC} is applied. This eliminates the need for an expensive local oscillator, making system integrations more affordable.



Features:

- Full Waveguide Band Coverage
- Low LO Power Requirement
- Low Conversion Loss
- IF Frequency up to 40 GHz

Applications:

- Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency	90 GHz		140 GHz
LO Frequency	90 GHz		140 GHz
IF Frequency	DC		20 GHz
LO Pumping Power	+0 dBm	+3 dBm	+10 dBm
Conversion Loss		13 dB	15 dB
Input P-1 dB		-10 dBm	
RF to LO Isolation		30 dB	
Combined RF and LO Power			+13 dBm
External Bias Voltage/Current		+5 V _{DC} /2 mA	+5 V _{DC} /5 mA
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:


Item	Specification
RF Port	WR-08 Waveguide with UG 387/U-M Flange
LO Port	WR-08 Waveguide with UG 387/U-M Flange
IF Port	K(F)
External Bias	SMA (F)
Case Material	Aluminum
Finish	Gold Plated
Weight	0.8 Oz
Size	1.16" (L) X 0.75" (W) X 0.75" (H)
Outline	FB-EF-2




F-Band Externally Biased Balanced Mixer

Typical Conversion Loss vs. Frequency

LO: +3 dBm, RF: -20 dBm, Bias: +5 Vdc/2 mA

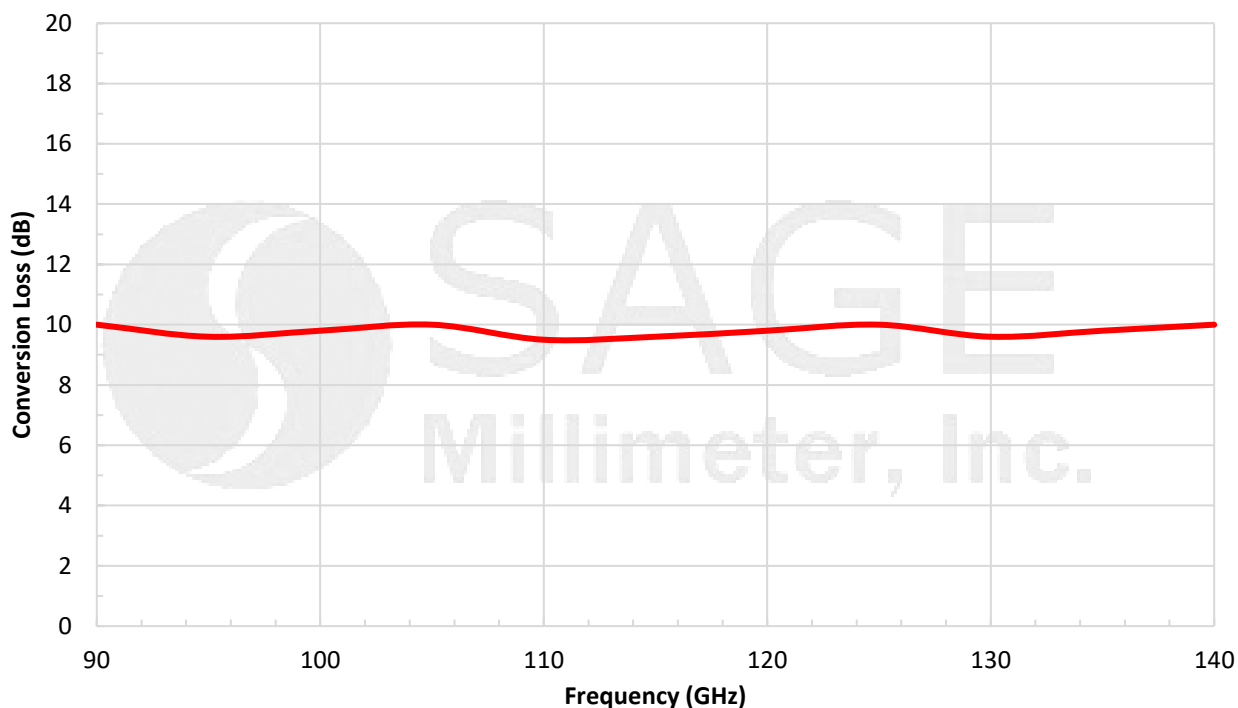

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

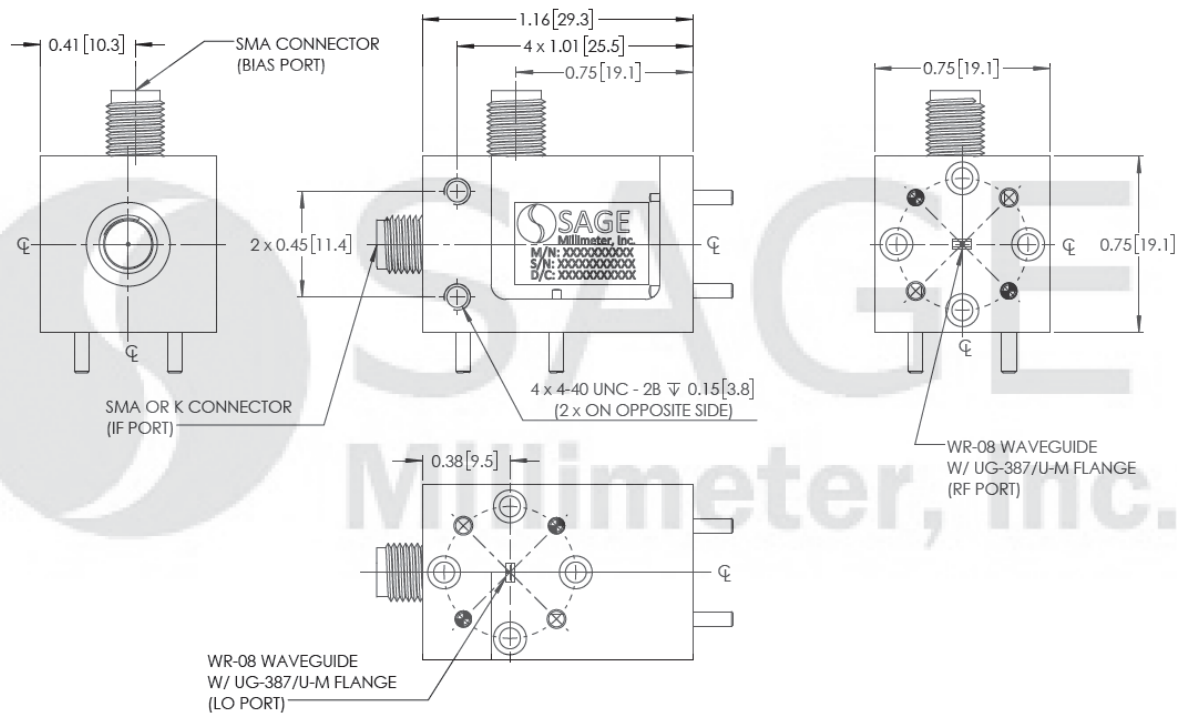

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com





F-Band Externally Biased Balanced Mixer

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- A DC block at IF port may be required when connecting to a device, such as an IF low noise amplifier or a base band mixer which input port is DC coupled.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- **The mixer is a small signal device. The typical RF input level is – 10 dBm or lower.**
- The device is static sensitive. Always follow ESD rules when working with the device.
- The IF port of the externally biased mixer is DC coupled. Due to the external bias, it has a small DC offset voltage (+0.7 V_{DC}), which could upset the connecting device performance or even damage the device. Use a **DC block when connecting to other devices.**
- **Never apply an external bias voltage to the IF port because the mixer will be damaged.**
- Any foreign objects in the waveguide will cause performance degradation and can possibly damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

