

WR-90 to WR-75 Waveguide Taper Transition

Description:

Model SWT-9075-LA is a WR-90 to WR-75 rectangular waveguide taper transition. The taper transition is manufactured by either EDM machining or electroforming techniques to ensure high accuracy and a quality surface finish. The transition only induces a fraction of a dB insertion loss and offers a VSWR of 1.05:1 or better.



Features:

- Rugged Waveguide Configuration
- Low Insertion Loss
- Instrumentation Grade


Applications:

- Test Labs
- Test Instrumentation
- Sub-assemblies

Mechanical Specifications:

Parameter	Connector
Waveguide	WR-90 Waveguide with UG-39/U flange
Waveguide	WR-75 Waveguide with Standard Flange
Material	Aluminum
Finish	Silver Plated (Inner) and Black Paint (Outer)
Weight	4.5 Oz
Insertion Length	3.5"
Outline	WT-X7

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

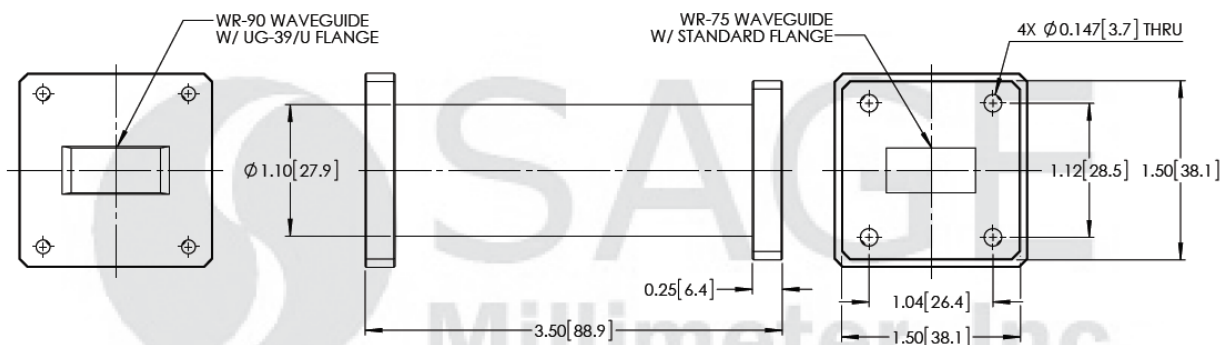

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com