SWG-34118-FB-FT

Rev. 1.0

WR-34 Flexible Waveguide Section, 11.81” (300 mm) Long

Description:



Model SWG-34118-FB-FT is a 11.81” (300 mm) long, WR-34 Band flexible and twistable waveguide section with UG-1530/U flanges. It also has a vulcanized silicone rubber jacket for robustness applications. The waveguide features a flexible bend with a static twist to be long-term stress free when it is integrated into systems. The waveguide is manufactured with a precision manufacturing process to ensure high quality. The waveguide has low insertion loss in the frequency range of 22 to 33 GHz. Various standard and custom length options are available under different model numbers.

Features:

- High Quality
- Flexible Bending and Static Twisting
- Comparable Cost to the Rigid Waveguide

Applications:

- 5G Systems
- Communication Systems
- Test Instrumentation

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	22 GHz		33 GHz
Insertion Loss		0.3 dB	
Return Loss		18 dB	
Power Handling			75 W (CW)
Specification Temperature		+25 ˚C	
Operation Temperature	-40 ˚C		+85 ˚C

Mechanical Specifications:

Item	Specification
Waveguide Port	WR-34 Waveguide with UG-1530/U Flange
Minimum Bending Radius (Static)	E-plane: 1” (35 mm); H-plane: 3” (70 mm)
Maximum Torsion Angle (Static)	510˚/meter
Material	Brass
Flange Finish	Nickel Plated
Waveguide Finish	Silver Plated
Waveguide Jacket Material	Vulcanized Silicone Rubber
Weight	3.5 Oz
Insertion Length	11.81” (300 mm)
Outline	WG-F3-F-L


www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

Copyright © 2018 by SAGE Millimeter, Inc.


SAGE Millimeter, Inc.

WR-34 Flexible Waveguide Section, 11.81” (300 mm) Long

Typical Performance vs. Frequency

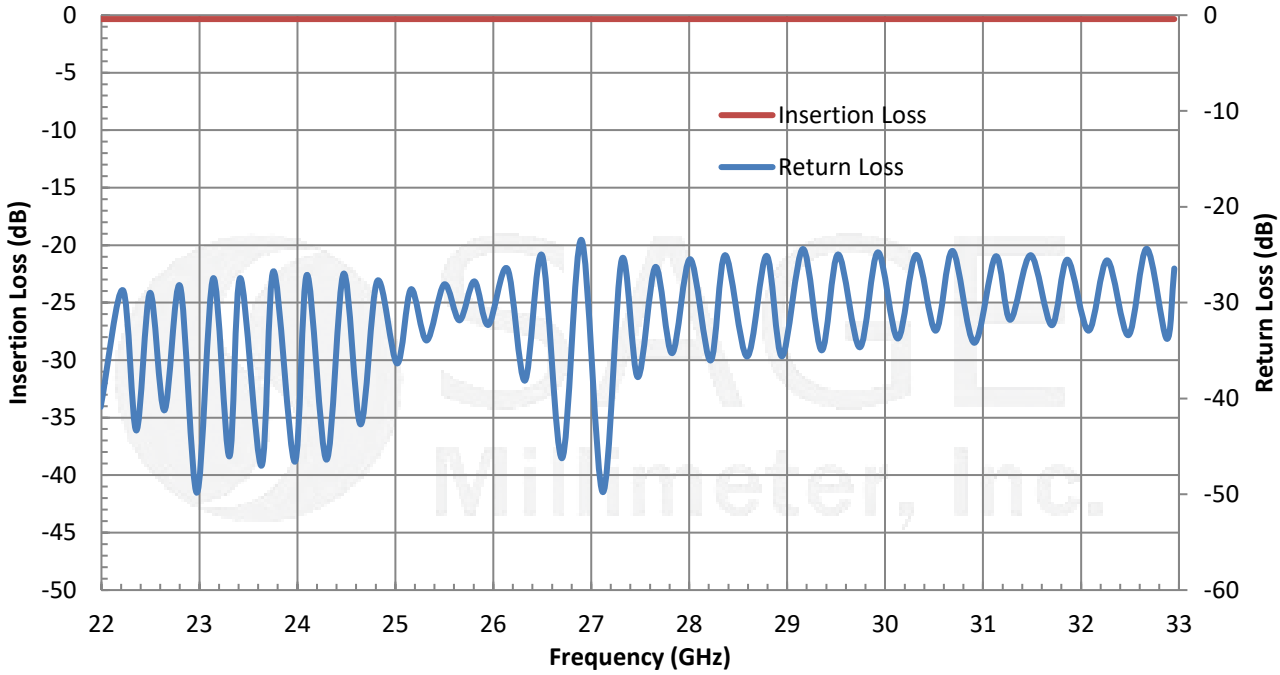

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

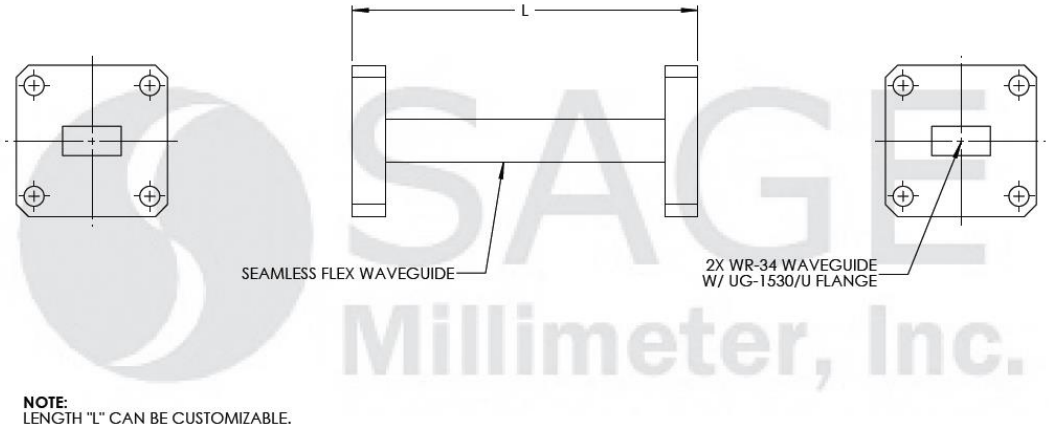

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 ˚C case temperature.
- Other mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

Copyright © 2018 by SAGE Millimeter, Inc.

SAGE Millimeter, Inc.