

- **Remote Terminal ADSL Line Driver**
  - **Ideal for Both Full Rate ADSL and G.Lite**
  - **Compatible With 1:1 Transformer Ratio**
- **Low 2.7 pA/√Hz Noninverting Current Noise**
  - **Reduces Noise Feedback Through Hybrid Into Downstream Channel**
- **Wide Supply Voltage Range ±5 V to ±15 V**
  - **Ideal for ±12-V Operation**
- **Wide Output Swing**
  - **42 Vpp Differential Output Voltage, R_L = 200 Ω, ±12-V Supply**
- **High Output Current**
  - **175 mA (typ)**
- **High Speed**
  - **110 MHz (−3 dB, G=8, ±12 V)**
  - **1500 V/μs Slew Rate (G = 8, ±12 V)**
- **Low Distortion, Single-Ended, G = 8**
  - **−83 dBc (250 kHz, 2 Vpp, 100-Ω load)**
- **Low Power Shutdown (THS6053)**
  - **300-μA Total Standby Current**
- **Thermal Shutdown and Short Circuit Protection**
- **Standard SOIC, SOIC PowerPAD, and TSSOP PowerPAD™ Package**
- **Evaluation Module Available**

THS6052
SOIC (D) AND
SOIC PowerPAD™ (DDA) PACKAGE
(TOP VIEW)




THS6053
SOIC (D) AND
TSSOP PowerPAD™ (PWP) PACKAGE
(TOP VIEW)

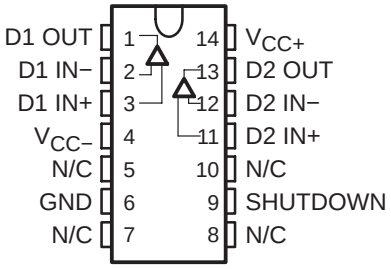

description

The THS6052/3 is a high-speed line driver ideal for driving signals from the remote terminal to the central office in asymmetrical digital subscriber line (ADSL) applications. It can operate from ±12-V supply voltages while drawing only 5.2 mA of supply current per channel. It offers low –83 dBc total harmonic distortion driving a 100-Ω load (2 Vpp). The THS6052/3 offers a high 42-Vpp differential output swing across a 200-Ω load from a ±12-V supply. The THS6053 features a low-power shutdown mode, consuming only 300 μA quiescent current per channel. The THS6052/3 is packaged in a standard SOIC, SOIC PowerPAD™, and TSSOP PowerPAD™ packages.

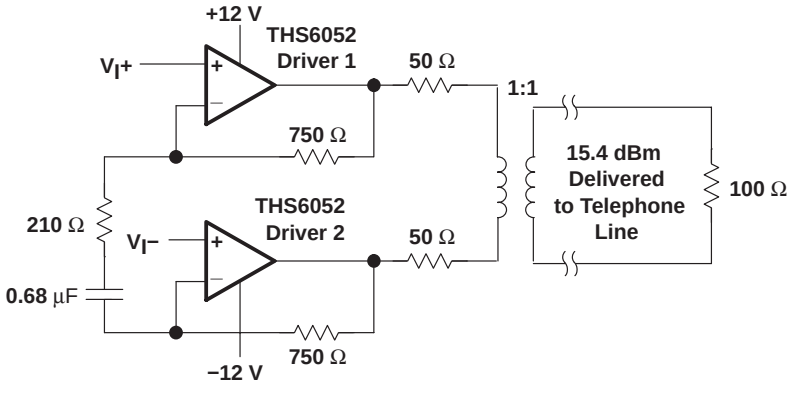

RELATED PRODUCTS

DEVICE	DESCRIPTION
THS6042/3	350-mA, ±12 ADSL CPE line driver
THS6092/3	275-mA, +12 V ADSL CPE line driver
OPA2677	380-mA, +12 V ADSL CPE line driver
THS6062	Low noise ADSL receiver

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerPAD is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2001, Texas Instruments Incorporated

AVAILABLE OPTION

T_A	PACKAGED DEVICE				EVALUATION MODULES
	SOIC-8 (D)	SOIC-8 PowerPAD (DDA)	SOIC-14 (D)	TSSOP-14 (PWP)	
0°C to 70°C	THS6052CD	THS6052CDDA	THS6053CD	THS6053CPWP	THS6052EVM THS6053EVM
−40°C to 85°C	THS6052ID	THS6052IDDA	THS6053ID	THS6053IPWP	—

absolute maximum ratings over operating free-air temperature (unless otherwise noted)†

Supply voltage, V_{CC+} to V_{CC-} . . . . . 33 V
Input voltage . . . . . ± V_{CC}
Output current (see Note 1) . . . . . 275 mA
Differential input voltage . . . . . ± 4 V
Maximum junction temperature . . . . . 150°C
Total power dissipation at (or below) 25°C free-air temperature . . . . . See Dissipation Ratings Table
Operating free-air temperature, T_A: Commercial . . . . . 0°C to 70°C
Industrial . . . . . −40°C to 85°C
Storage temperature, T_{stg} : Commercial . . . . . −65°C to 125°C
Industrial . . . . . −65°C to 125°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds . . . . . 300°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The THS6052 and THS6053 may incorporate a PowerPAD™ on the underside of the chip. This acts as a heatsink and must be connected to a thermally dissipating plane for proper power dissipation. Failure to do so may result in exceeding the maximum junction temperature which could permanently damage the device. See TI technical brief SLMA002 for more information about utilizing the PowerPAD™ thermally enhanced package.

DISSIPATION RATING TABLE

PACKAGE	θ_{JA}	θ_{JC}	T_A = 25°C T_J = 150°C POWER RATING
D-8	95°C/W‡	38.3°C/W‡	1.32 W
DDA	45.8°C/W‡	9.2°C/W‡	2.73 W
D-14	66.6°C/W‡	26.9°C/W‡	1.88 W
PWP	37.5°C/W	1.4°C/W	3.3 W

‡ This data was taken using the JEDEC proposed high-K test PCB. For the JEDEC low-K test PCB, the Θ_{JA} is168°C/W for the D−8 package and 122.3°C/W for the D−14 package.

recommended operating conditions

		MIN	NOM	MAX	UNIT
Supply voltage, V_{CC+} to V_{CC-}	Dual supply	±5		±15	V
	Single supply	10		30	
Operating free-air temperature, T_A	C-suffix	0		70	°C
	I-suffix	−40		85	

electrical characteristics over recommended operating free-air temperature range, T_A = 25°C, V_{CC} = ±12 V, $R_{FEEDBACK}$ = 750 Ω, R_L = 100 Ω (unless otherwise noted)

dynamic performance

PARAMETER		TEST CONDITIONS			MIN	TYP	MAX	UNIT
BW	Small-signal bandwidth (−3 dB)	R_L = 50 Ω	G= 1, R_F = 1 kΩ	V_{CC} = ±5 V		110		MHz
				V_{CC} = ±12 V		120		
			G= 2, R_F = 680 Ω	V_{CC} = ±5 V, ±12 V		100		
			G= 8, R_F = 330 Ω			90		
		R_L = 100 Ω	G= 1, R_F = 1 kΩ	V_{CC} = ±5 V		150		
				V_{CC} = ±12 V		170		
			G= 2, R_F = 680 Ω	V_{CC} = ±5 V, ±12 V		135		
			G= 8, R_F = 330 Ω			110		
SR	Slew rate (see Note 2), G=8	V_O = 4 V_{PP}	V_{CC} = ±5 V	V_{CC} = ±5 V		650		V/µs
			V_{CC} = ±12 V	V_{CC} = ±12 V		850		
			V_{CC} = ±15 V	V_{CC} = ±15 V		950		
		V_O = 16 V_{PP}	V_{CC} = ±12 V	V_{CC} = ±12 V		1500		
			V_{CC} = ±15 V	V_{CC} = ±15 V		1700		

NOTE 2: Slew rate is defined from the 25% to the 75% output levels.

noise/distortion performance

PARAMETER			TEST CONDITIONS		MIN	TYP	MAX	UNIT
THD	Total harmonic distortion (single-ended configuration)		Gain = 8, R_L = 100 Ω, V_{CC} = ±12 V, f = 250 kHz	$V_{O(pp)}$ = 2 V		−83		dBc
				$V_{O(pp)}$ = 16 V		−78		
			Gain = 8, R_L = 50 Ω, V_{CC} = ±5 V, f = 250 kHz	$V_{O(pp)}$ = 2 V		−74		
				$V_{O(pp)}$ = 6 V		−72		
V_n	Input voltage noise		V_{CC} = ±5 V, ±12 V, f = 10 kHz ,			2.1		nV/√Hz
I_n	Input current noise	+Input	f = 10 kHz, V_{CC} = ±5 V, V_{CC} = ±12 V, V_{CC} = ±15 V			2.7		pA/√Hz
		−Input				10.7		
X_T	Crosstalk		f = 250 kHz, G = 2, V_{CC} = ±12 V, R_L= 100 Ω	V_O = 2 Vp-p		−79		dBc
			f = 250 kHz, G = 2, V_{CC} = ±5 V, R_L= 50 Ω	V_O = 2 Vp-p		−71		

electrical characteristics over recommended operating free-air temperature range, T_A = 25°C, V_{CC} = ±12 V, $R_{FEEDBACK}$ = 750 Ω, R_L = 100 Ω (unless otherwise noted) (continued)

dc performance

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V_{OS}	Input offset voltage	V_{CC} = ±12 V, V_{CC} = ±6 V	T_A = 25°C		5	10	mV
			T_A = full range			15	
	Differential offset voltage		T_A = 25°C		3	6	
			T_A = full range			8	
	Offset drift		T_A = full range			30	µV/°C
I_{IB}	− Input bias current	V_{CC} = ±12 V, V_{CC} = ±6 V	T_A = 25°C		5	10	µA
			T_A = full range			12	
	+ Input bias current		T_A = 25°C		2	5	
			T_A = full range			6	
	Differential input bias current		T_A = 25°C		5	10	
			T_A = full range			12	
Z_{OL}	Open loop transimpedance	V_{CC} = ±12 V, V_{CC} = ±6 V	R_L = 1 kΩ,		1		MΩ

input characteristics

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V_{ICR}	Input common-mode voltage range	V_{CC} = ±12 V		±9.7	±10.1		V
		V_{CC} = ±6 V		±3.8	±4.2		
CMRR	Common-mode rejection ratio	V_{CC} = ±12 V, V_{CC} = ±6 V	T_A = 25°C	59	66		dB
			T_A = full range	57			
R_I	Input resistance	+ Input			1.5		MΩ
		− Input			15		Ω
C_I	Input capacitance				2		pF

output characteristics

PARAMETER			TEST CONDITIONS		MIN	TYP	MAX	UNIT
V_O	Output voltage swing	Single ended	R_L = 50 Ω,	V_{CC} = ± 6 V	±4.2	±4.6		V
			R_L = 100 Ω	V_{CC} = ±12 V	±10.1	±10.5		
				V_{CC} = ±6 V	±4.4	±4.8		
I_O	Output current		R_L = 25 Ω,	V_{CC} = ±12 V	150	175		mA
			R_L = 10 Ω,	V_{CC} = ±6 V	150	175		
I_{SC}	Short-circuit current		R_L = 0 Ω,	V_{CC} = ±12 V		250		mA
	Output resistance		Open loop			14		Ω

electrical characteristics over recommended operating free-air temperature range, T_A = 25°C, V_{CC} = ±12 V, $R_{FEEDBACK}$ = 750 Ω, R_L = 100 Ω (unless otherwise noted) (continued)

power supply

PARAMETER			TEST CONDITIONS		MIN	TYP	MAX	UNIT
V_{CC}	Operating range	Dual supply			±4.5		±16.5	V
		Single supply			9		33	
I_{CC}	Quiescent current (each driver)		V_{CC} = ±12 V	T_A = 25°C		5.2	7	mA
				T_A = full range			8	
			V_{CC} = ±6 V	T_A = 25°C		4.5	6.5	
				T_A = full range			7.5	
PSRR	Power supply rejection ratio		V_{CC} = ±12 V	T_A = 25°C	−64	−62		dB
				T_A = full range	−61	−		
			V_{CC} = ±6 V	T_A = 25°C	−60	−70		
				T_A = full range	−58			

shutdown characteristics (THS6053 only)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{IL(SHDN)}$	Shutdown pin voltage for power up	V_{CC} = ±6 V, ±12 V GND = 0 V, (GND Pin as Reference)			0.8	V
$V_{IH(SHDN)}$	Shutdown pin voltage for power down	V_{CC} = ±6 V, ±12 V, GND = 0 V, (GND Pin as Reference)	2			V
$I_{CC(SHDN)}$	Total quiescent current when in shutdown state	V_{GND} = 0 V, V_{CC} = ±6 V, ±12 V		0.3	0.7	mA
t_{DIS}	Disable time (see Note 3)	V_{CC} = ±12 V		0.1		µs
t_{EN}	Enable time (see Note 3)	V_{CC} = ±12 V		0.4		µs
$I_{IL(SHDN)}$	Shutdown pin input bias current for power up	V_{CC} = ±6 V, ±12 V		40	100	µA
$I_{IH(SHDN)}$	Shutdown pin input bias current for power down	V_{CC} = ±6 V, ±12 V, $V_{(SHND)}$ = 3.3 V		50	100	µA

NOTE 3: Disable/enable time is defined as the time from when the shutdown signal is applied to the SHDN pin to when the supply current has reached half of its final value.

APPLICATION INFORMATION

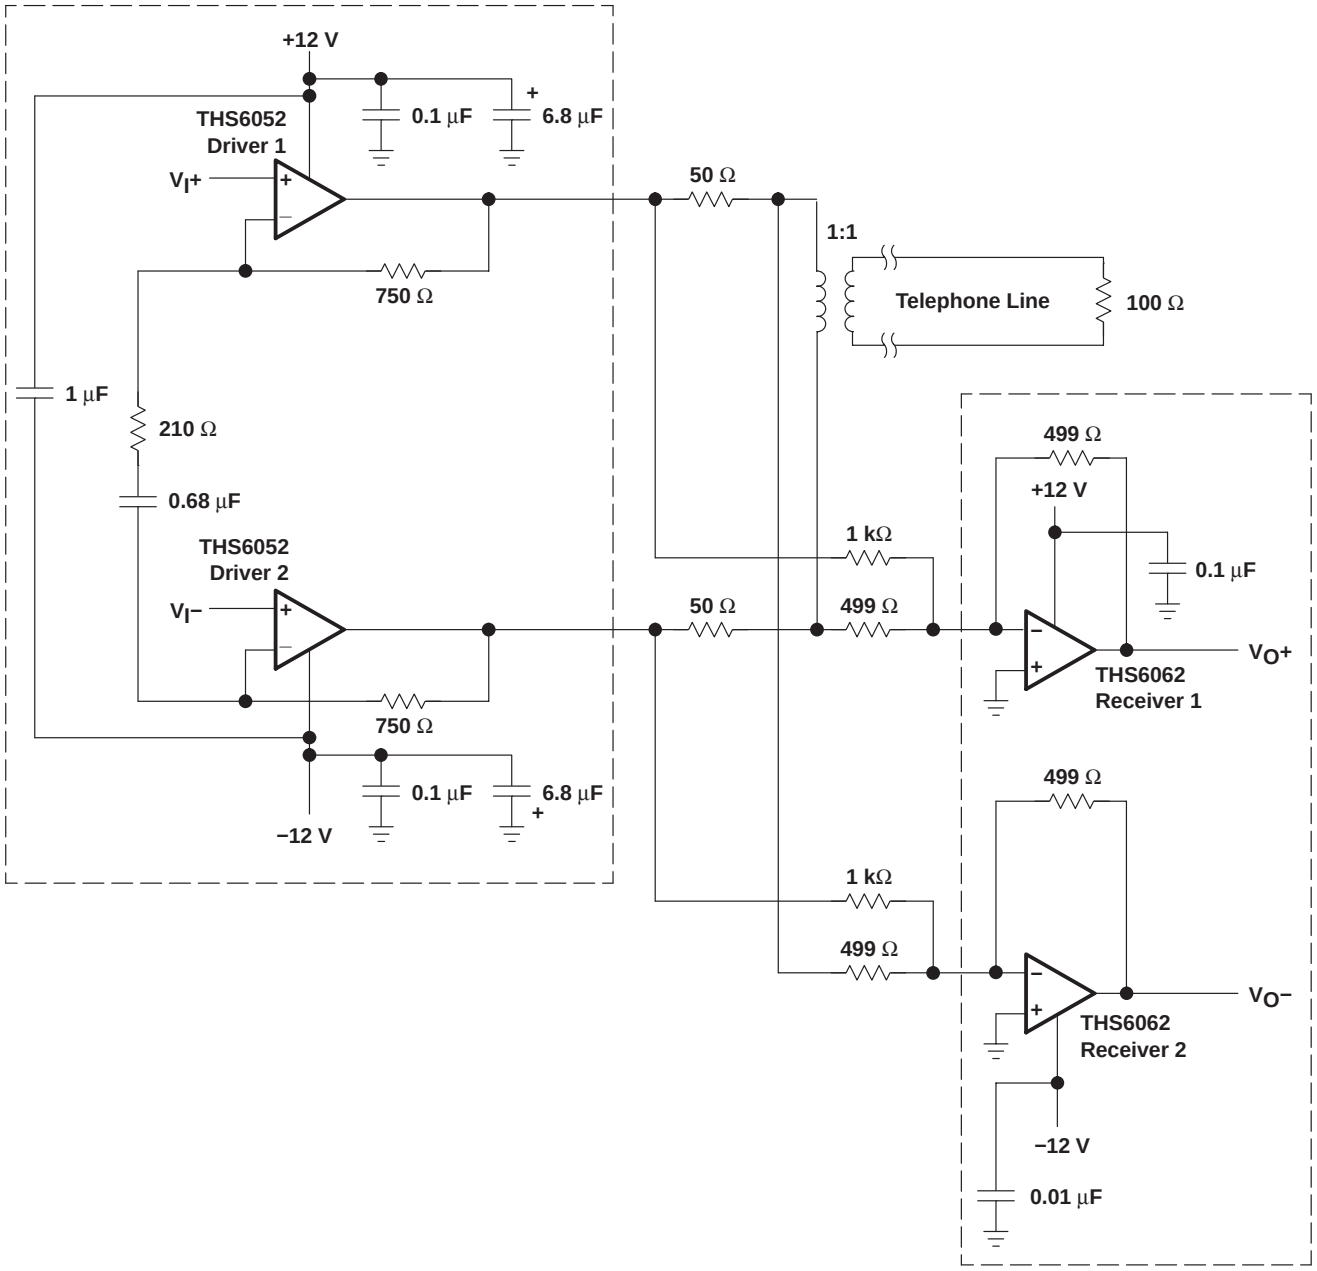


Figure 1. THS6052 ADSL Application With 1:1 Transformer Ratio

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
THS6052CDDA	ACTIVE	SO PowerPAD	DDA	8	75	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	0 to 70	6052C	Samples
THS6052ID	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	6052I	Samples
THS6052IDDA	ACTIVE	SO PowerPAD	DDA	8	75	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	6052I	Samples
THS6053CPWPR	ACTIVE	HTSSOP	PWP	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	0 to 70	HS6053C	Samples
THS6053IPWP	ACTIVE	HTSSOP	PWP	14	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	HS6053I	Samples
THS6053IPWPR	ACTIVE	HTSSOP	PWP	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	HS6053I	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".
RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.
Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.


(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

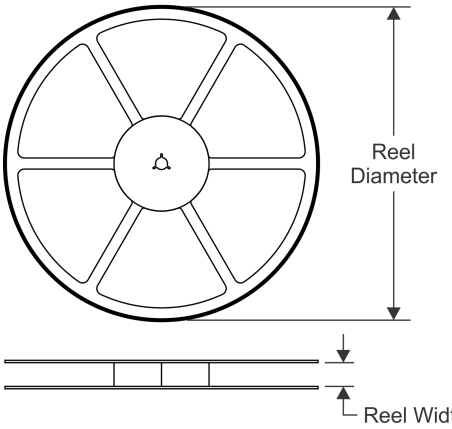


TAPE DIMENSIONS

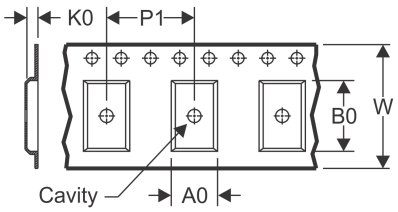

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

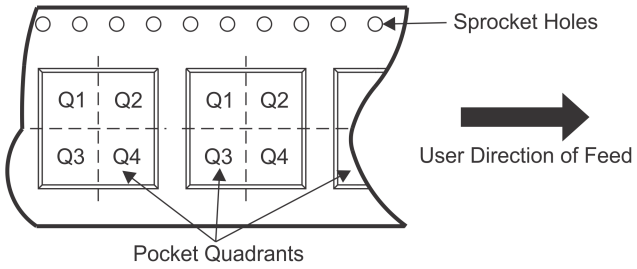

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
THS6053CPWPR	HTSSOP	PWP	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
THS6053IPWPR	HTSSOP	PWP	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

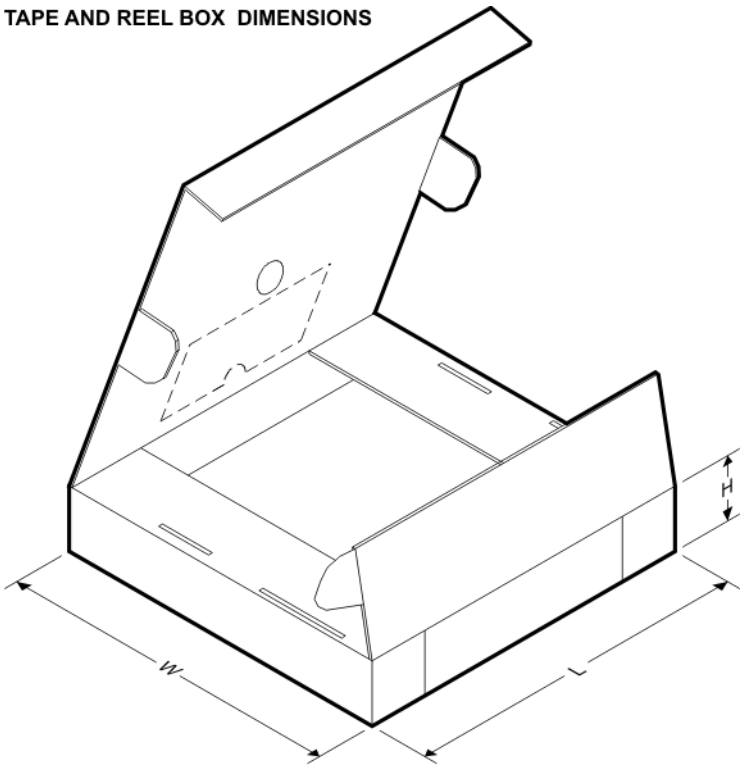


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
THS6053CPWPR	HTSSOP	PWP	14	2000	350.0	350.0	43.0
THS6053IPWPR	HTSSOP	PWP	14	2000	350.0	350.0	43.0

DDA 8 PowerPAD™ SOIC - 1.7 mm max height

PLASTIC SMALL OUTLINE

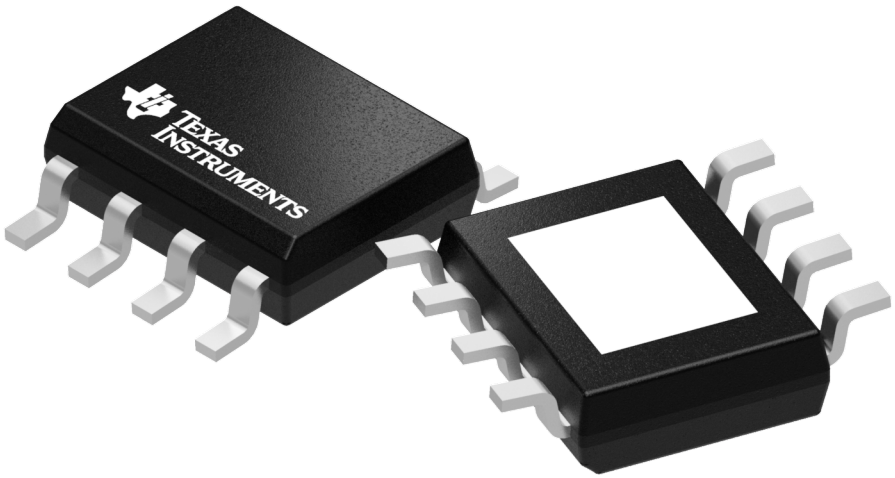


Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

PACKAGE OUTLINE

DDA0008B

PowerPAD™ SOIC - 1.7 mm max height


PLASTIC SMALL OUTLINE

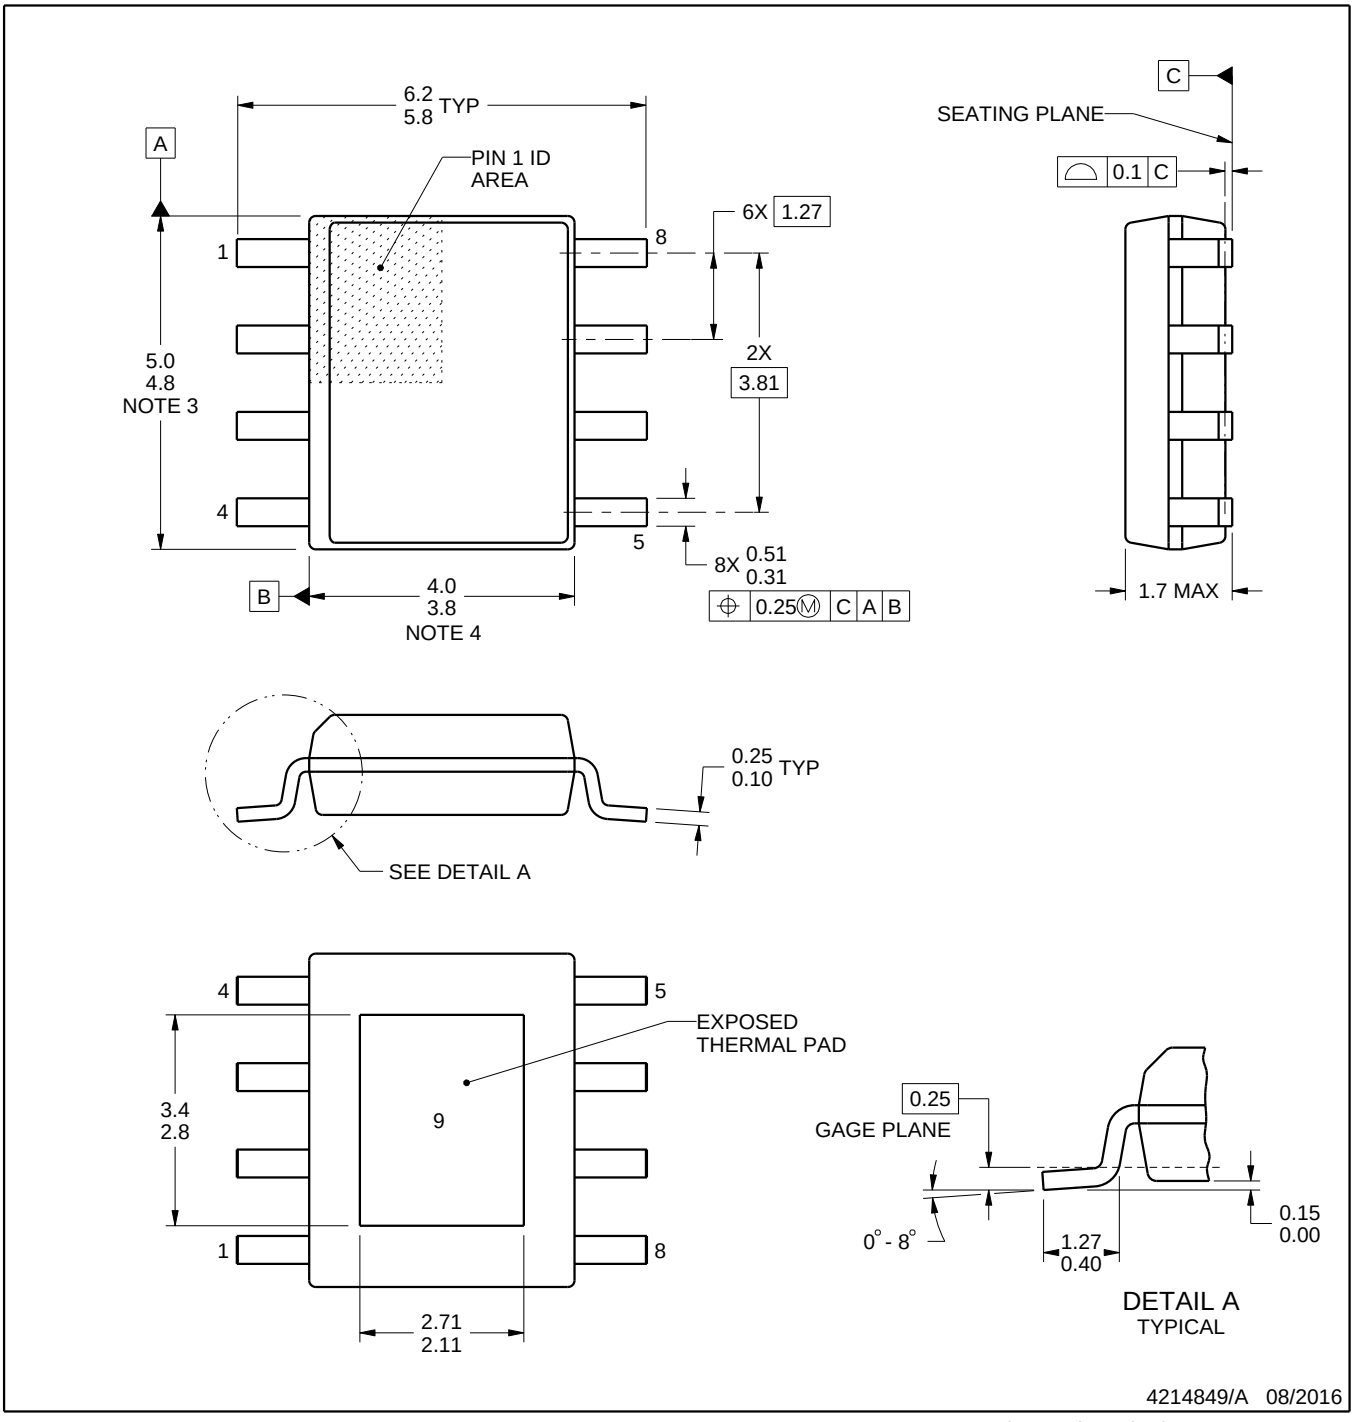


PowerPAD is a trademark of Texas Instruments.

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MS-012.

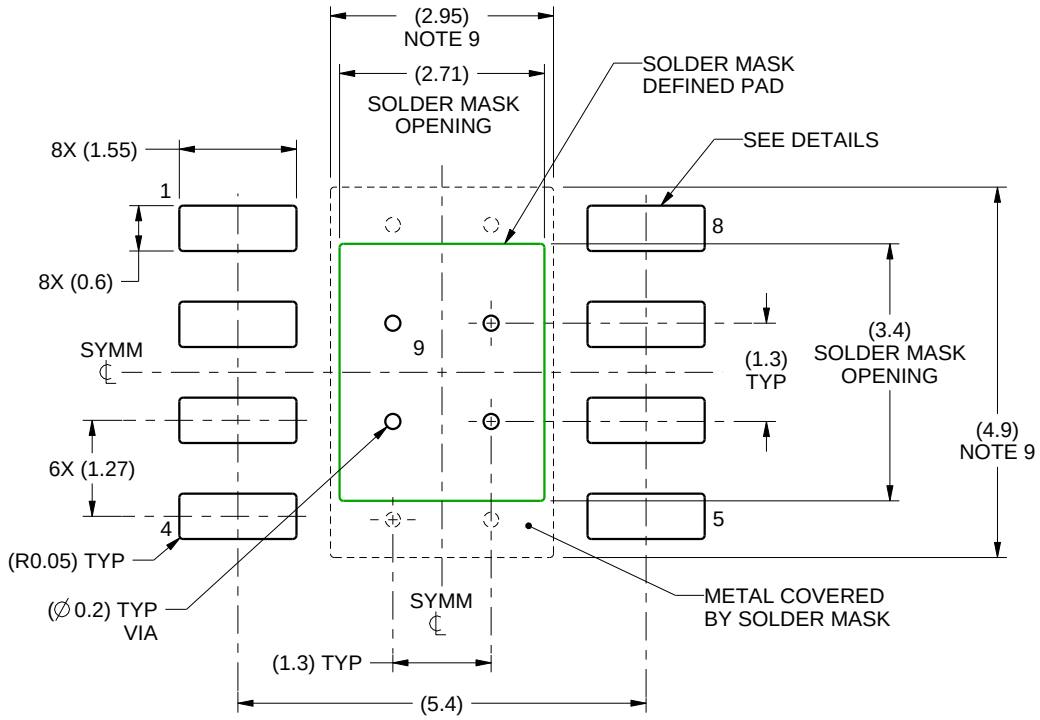

LAND PATTERN EXAMPLE
SCALE:10X

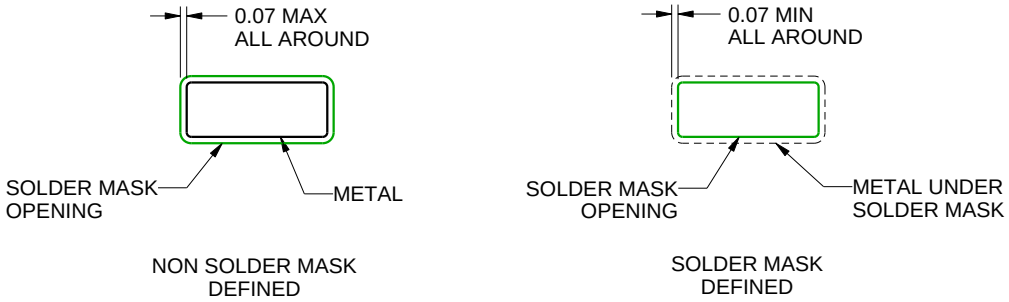

SOLDER MASK DETAILS
PADS 1-8

4214849/A 08/2016

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 (www.ti.com/lit/slma002) and SLMA004 (www.ti.com/lit/slma004).
9. Size of metal pad may vary due to creepage requirement.
10. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

DDA0008B

PowerPAD™ SOIC - 1.7 mm max height

PLASTIC SMALL OUTLINE

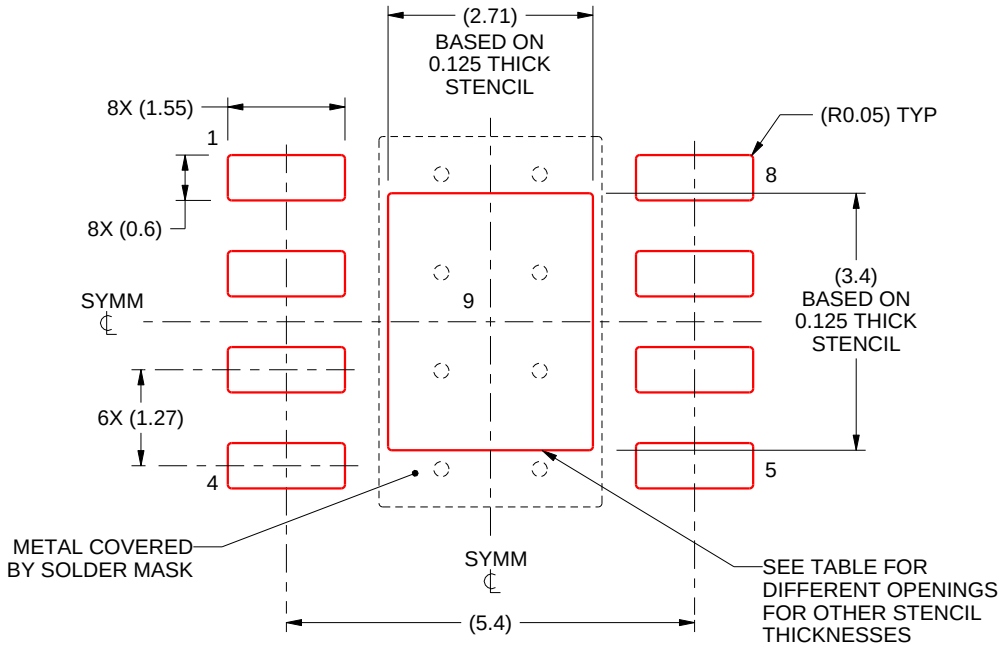


SOLDER PASTE EXAMPLE
EXPOSED PAD
100% PRINTED SOLDER COVERAGE BY AREA
SCALE:10X

STENCIL THICKNESS	SOLDER STENCIL OPENING
0.1	3.03 X 3.80
0.125	2.71 X 3.40 (SHOWN)
0.150	2.47 X 3.10
0.175	2.29 X 2.87

4214849/A 08/2016

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.




PACKAGE OUTLINE

D0008A


SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

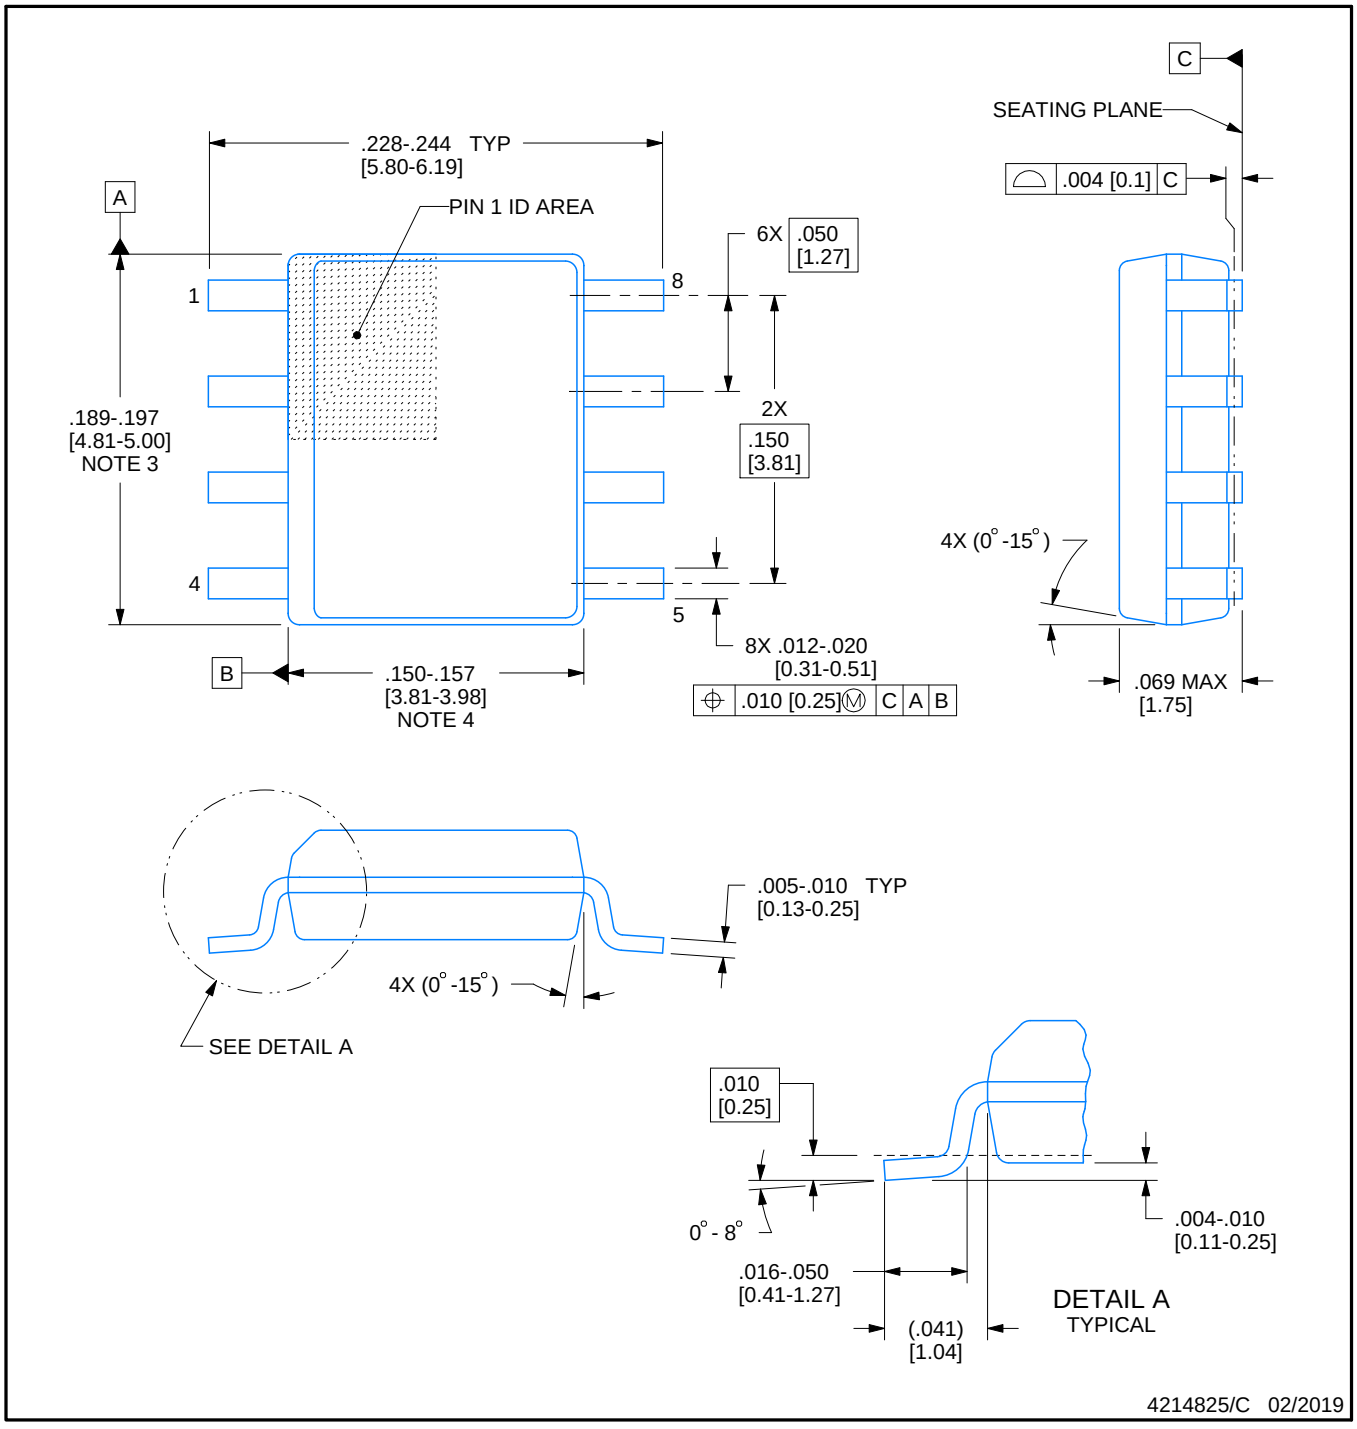


NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

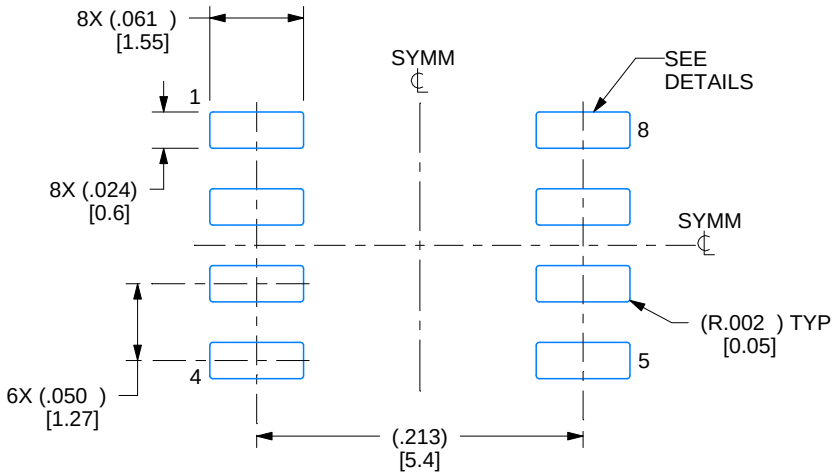

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

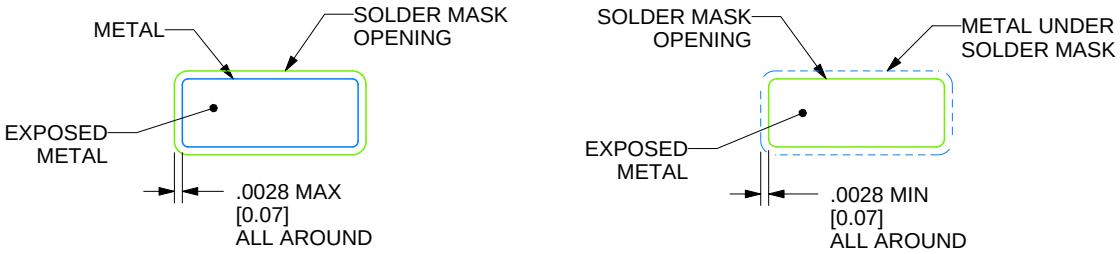

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

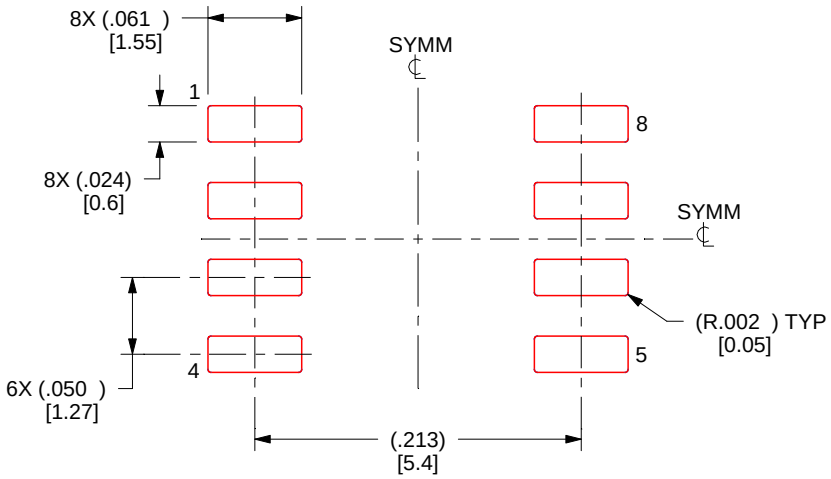


SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

PWP (R–PDSO–G14) PowerPAD™ PLASTIC SMALL OUTLINE

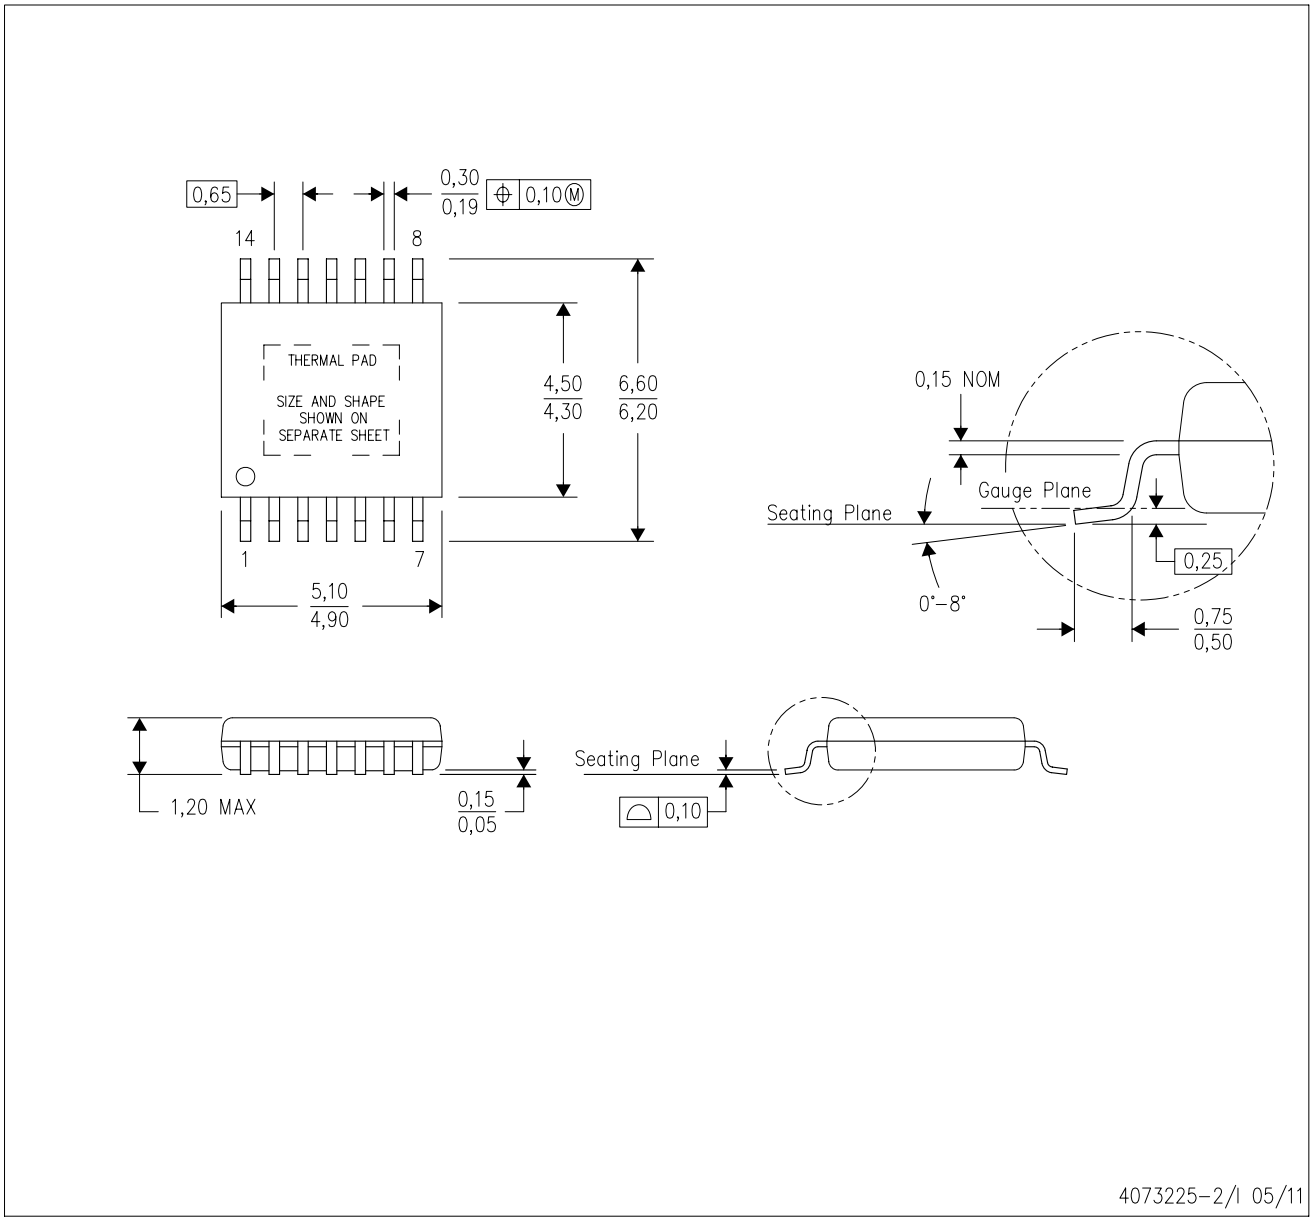

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusions. Mold flash and protrusion shall not exceed 0.15 per side.
D. This package is designed to be soldered to a thermal pad on the board. Refer to Technical Brief, PowerPad Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 for information regarding recommended board layout. This document is available at www.ti.com <http://www.ti.com>.
E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
E. Falls within JEDEC MO–153

PowerPAD is a trademark of Texas Instruments.


PWP (R–PDSO–G14) PowerPAD™ SMALL PLASTIC OUTLINE

THERMAL INFORMATION

This PowerPAD™ package incorporates an exposed thermal pad that is designed to be attached to a printed circuit board (PCB). The thermal pad must be soldered directly to the PCB. After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For additional information on the PowerPAD package and how to take advantage of its heat dissipating abilities, refer to Technical Brief, PowerPAD Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 and Application Brief, PowerPAD Made Easy, Texas Instruments Literature No. SLMA004. Both documents are available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

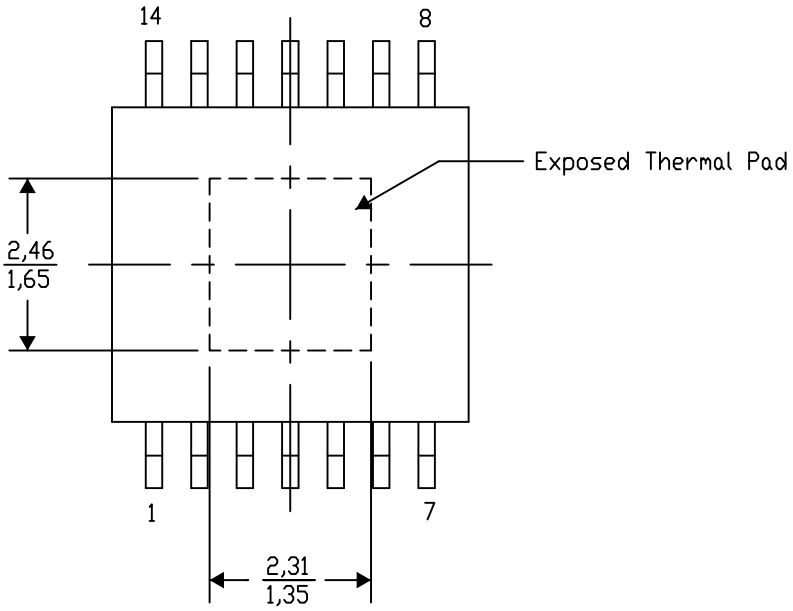

Top View


Exposed Thermal Pad Dimensions

4206332–2/AO 01/16

NOTE: A. All linear dimensions are in millimeters

PowerPAD is a trademark of Texas Instruments

PWP (R–PDSO–G14) PowerPAD™ PLASTIC SMALL OUTLINE

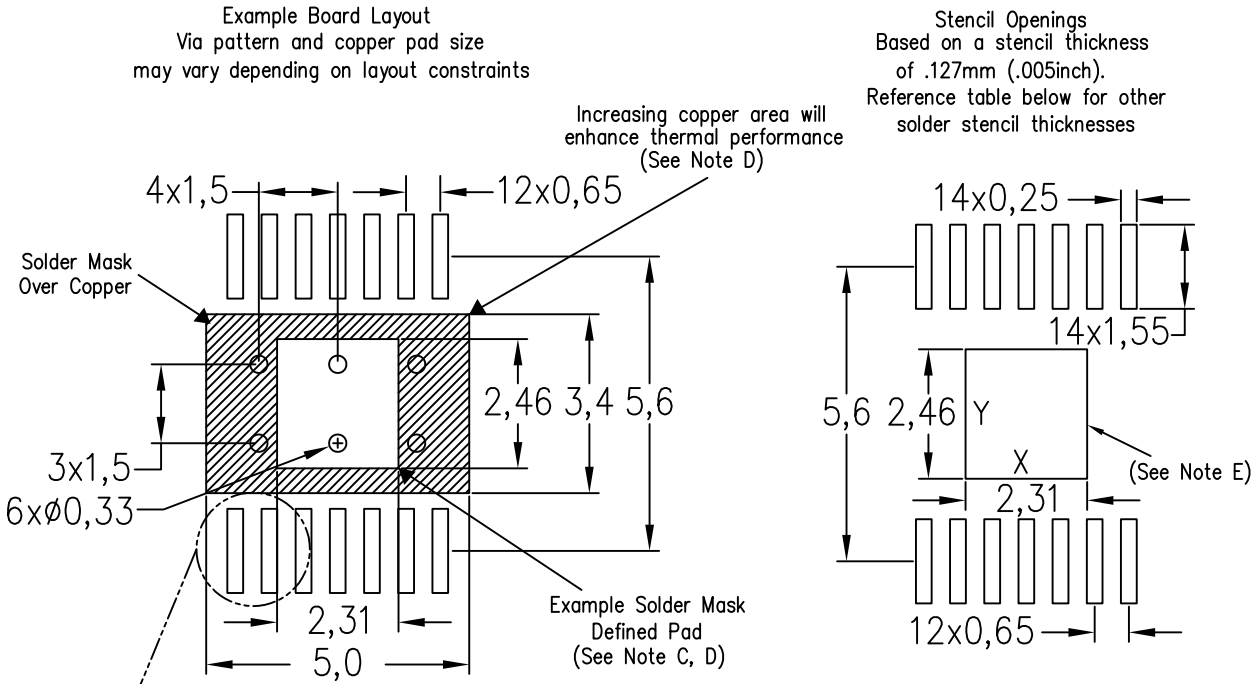

Center Power Pad Solder Stencil Opening		
Stencil Thickness	X	Y
0.1mm	2.5	2.65
0.127mm	2.31	2.46
0.152mm	2.15	2.3
0.178mm	2.05	2.15

4207609–2/W 09/15

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
D. This package is designed to be soldered to a thermal pad on the board. Refer to Technical Brief, PowerPad Thermally Enhanced Package, Texas Instruments Literature No. SLMA002, SLMA004, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <http://www.ti.com>. Publication IPC–7351 is recommended for alternate designs.
E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC–7525 for other stencil recommendations.
F. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.


PWP (R–PDSO–G14) PowerPAD™ SMALL PLASTIC OUTLINE

THERMAL INFORMATION

This PowerPAD™ package incorporates an exposed thermal pad that is designed to be attached to a printed circuit board (PCB). The thermal pad must be soldered directly to the PCB. After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For additional information on the PowerPAD package and how to take advantage of its heat dissipating abilities, refer to Technical Brief, PowerPAD Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 and Application Brief, PowerPAD Made Easy, Texas Instruments Literature No. SLMA004. Both documents are available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

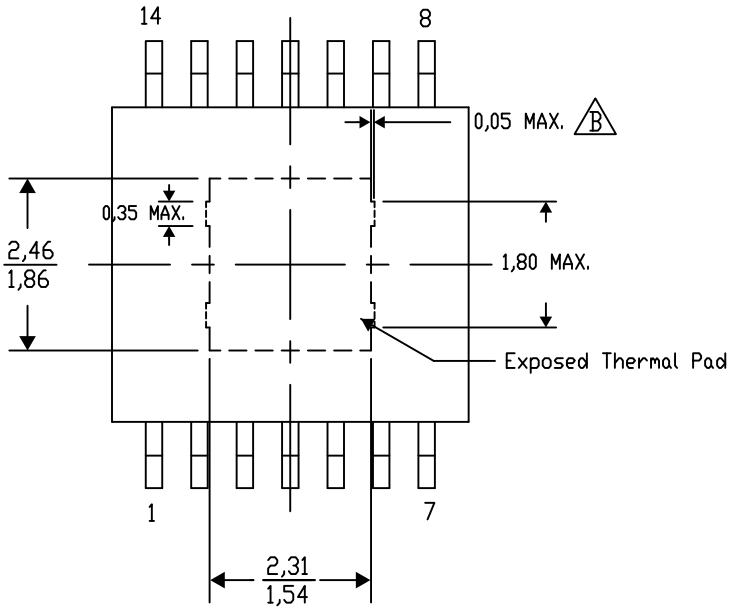

Top View

Exposed Thermal Pad Dimensions


4206332–44/AO 01/16

NOTE: A. All linear dimensions are in millimeters

B. Exposed tie strap features may not be present.

PowerPAD is a trademark of Texas Instruments

PWP (R–PDSO–G14) PowerPAD™ PLASTIC SMALL OUTLINE

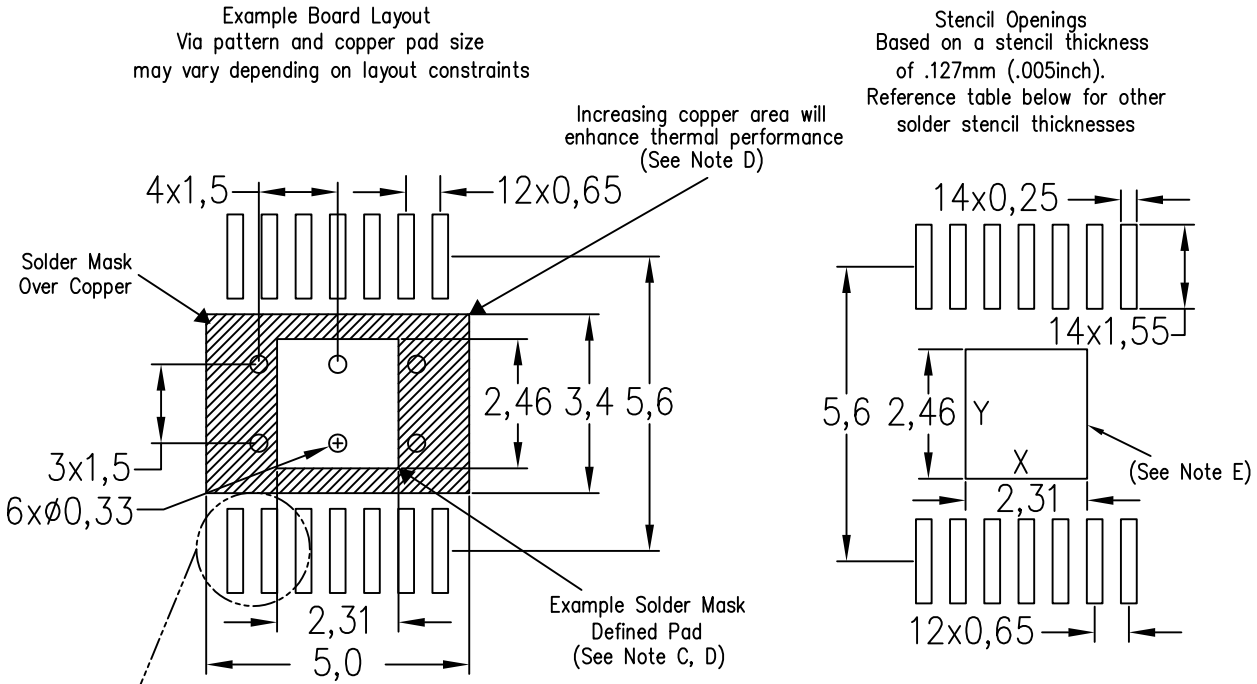

Center Power Pad Solder Stencil Opening		
Stencil Thickness	X	Y
0.1mm	2.5	2.65
0.127mm	2.31	2.46
0.152mm	2.15	2.3
0.178mm	2.05	2.15

4207609–2/W 09/15

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
D. This package is designed to be soldered to a thermal pad on the board. Refer to Technical Brief, PowerPad Thermally Enhanced Package, Texas Instruments Literature No. SLMA002, SLMA004, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <http://www.ti.com>. Publication IPC–7351 is recommended for alternate designs.
E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC–7525 for other stencil recommendations.
F. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2019, Texas Instruments Incorporated