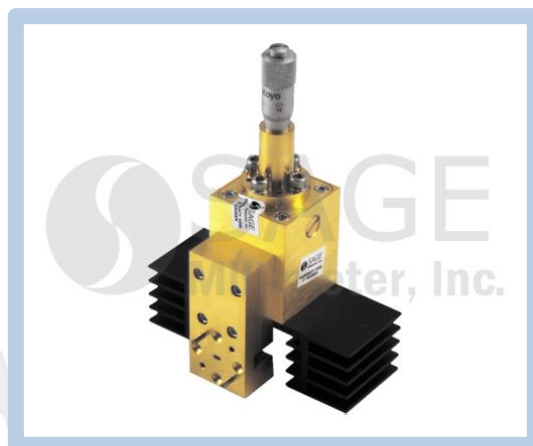


W-Band Wide Mechanical Tuning Bandwidth Gunn Oscillator, 80 to 110 GHz

Description:

Model SOF-1003-M1 is a W-Band, wide mechanical tuning bandwidth Gunn oscillator that utilizes a high-performance GaAs Gunn diode and proprietary cavity design to deliver 0 dBm typical power with low AM/FM noise and harmonic emissions. The oscillator has a center frequency of 95 GHz and a mechanical tuning range of ± 15 GHz. Compared to its multiplier based counterparts, the Gunn oscillator is a lower cost alternative and a cleaner source. The Gunn oscillator is equipped with a micrometer for quick frequency tuning when used as a bench top unit. Models with a self-locking set screw for frequency tuning are available under a different model number for use in system integration applications. The performance of the oscillator can be further enhanced by adding an optional integrated isolator, Gunn oscillator modulator/regulator, and temperature heater.



Features:

- Low AM/FM Noise and Harmonics
- Broad Mechanical Tuning Bandwidth
- Micrometer Tuner

Applications:

- Test Sources
- Signal Generation
- Lab Test Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency		95 GHz	
Mechanical Tuning Range		± 15 GHz	
Output Power		0 dBm	
Bias Voltage		+4.5 V _{DC}	+5.5 V _{DC}
Bias Current		1.0 A	
Specification Temperature		+25 °C	
Case Temperature	0 °C		+50 °C

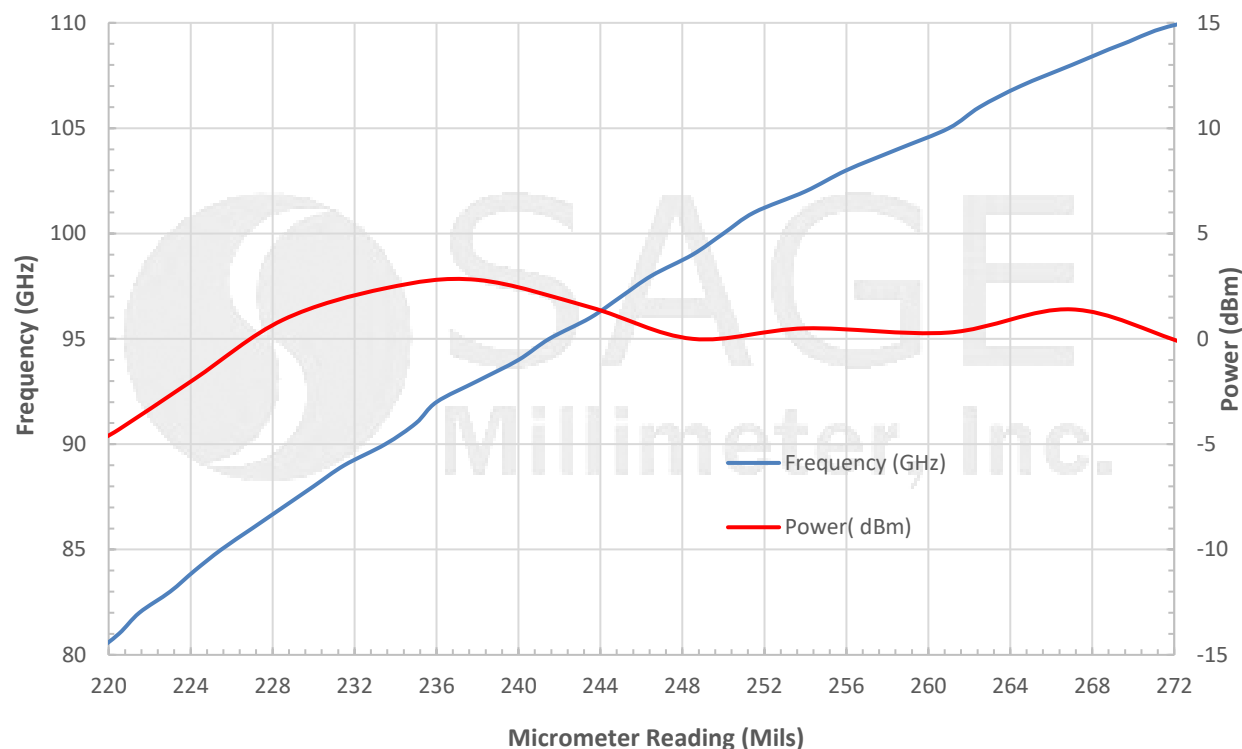
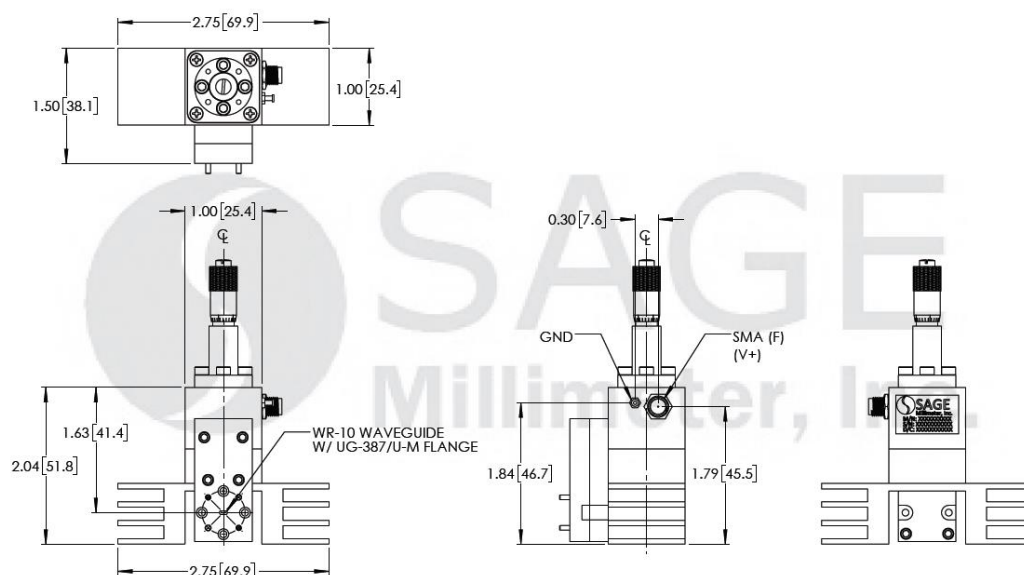
Mechanical Specifications:

Item	Specification
RF Port	WR-10 Waveguide with UG-387/U-M Flange
Bias Port	SMA (F)
Case Material	Aluminum
Finish	Gold Plated
Weight	4 Oz
Size	2.75" (W) X 1.50" (L)
Outline	OF-MW-C-M



W-Band Wide Mechanical Tuning Bandwidth Gunn Oscillator, 80 to 110 GHz

Typical Frequency and Power Output vs. Micrometer Reading

Bias: +5 V_{DC}/875 mA**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

W-Band Wide Mechanical Tuning Bandwidth Gunn Oscillator, 80 to 110 GHz

Note:

- All data presented is collected from a sample lot. It is for illustration only. Actual data varies unit to unit.
- The data given above was tested under case temperature **+35° C.**
- Always set micrometer reading to around **95 GHz** when turning on the oscillator to ensure correct mode operation.
- SAGE Millimeter Gunn oscillator regulator, **model SOR-R3**, is highly recommended to prevent the Gunn oscillator damage due to possible over voltage and/or reverse bias. The outline of the regulator is shown in the appendix section below.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Reversing polarity will destroy the device.
- Bias voltage should not exceed **+5.5 Volts.**
- The case temperature of the device should not exceed **+55° C.** Use an additional heatsink or fan if necessary.
- When handling coax connectors, proper torque, 8.0 ± 0.4 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will destroy the device.

Appendix: Outline of Gunn Oscillator Regulator, Model SOR-R3

