

E-Band Waveguide to 1.0 mm Connector Adapter, Right Angle

Description:

Models SWC-121F-R1 and SWC-121M-R1 are right angle (90°) E-Band waveguide to coax adapters that cover the frequency range of 60 to 90 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and 1.0 mm coax connector. The end launch (180°) versions are offered under model numbers SWC-121F-E1 and SWC-121M-E1.



Features:

- Full Waveguide Band Coverage
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Open Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	60 GHz		90 GHz
Insertion Loss		1.0 dB	
Return Loss		14 dB	
Power Handling	A	Manusco I	10 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:


Item	Specification	
Waveguide	WR-12 with UG387/U Flange	
Coaxial	1.0 mm Female for Model Number: SWC-121F-R1	
Coaxial	1.0 mm Male for Model Number: SWC-121M-R1	
Size	1.05" (L) x 0.75" (D)	
Housing Material	Aluminum	
Finish	Gold Plated	
Weight	0.4 Oz	
Outline	WC-ER	




www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

E-Band Waveguide to 1.0 mm Connector Adapter, Right Angle

Typical Insertion Loss and Return Loss vs. Frequency (Back to Back)

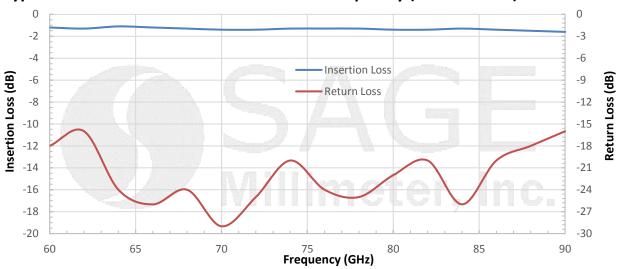

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

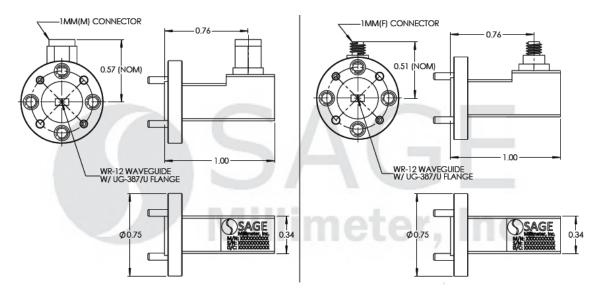

Note:

- All data are presented using a limited sample lot, actual data may vary unit to unit.
- All testing was performed under 25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and may damage the adapter.
- Proper torque, 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm), should be used. **SAGE Millimeter** torque wrench, model SCH-06004-S1, is highly recommended.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com