
REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

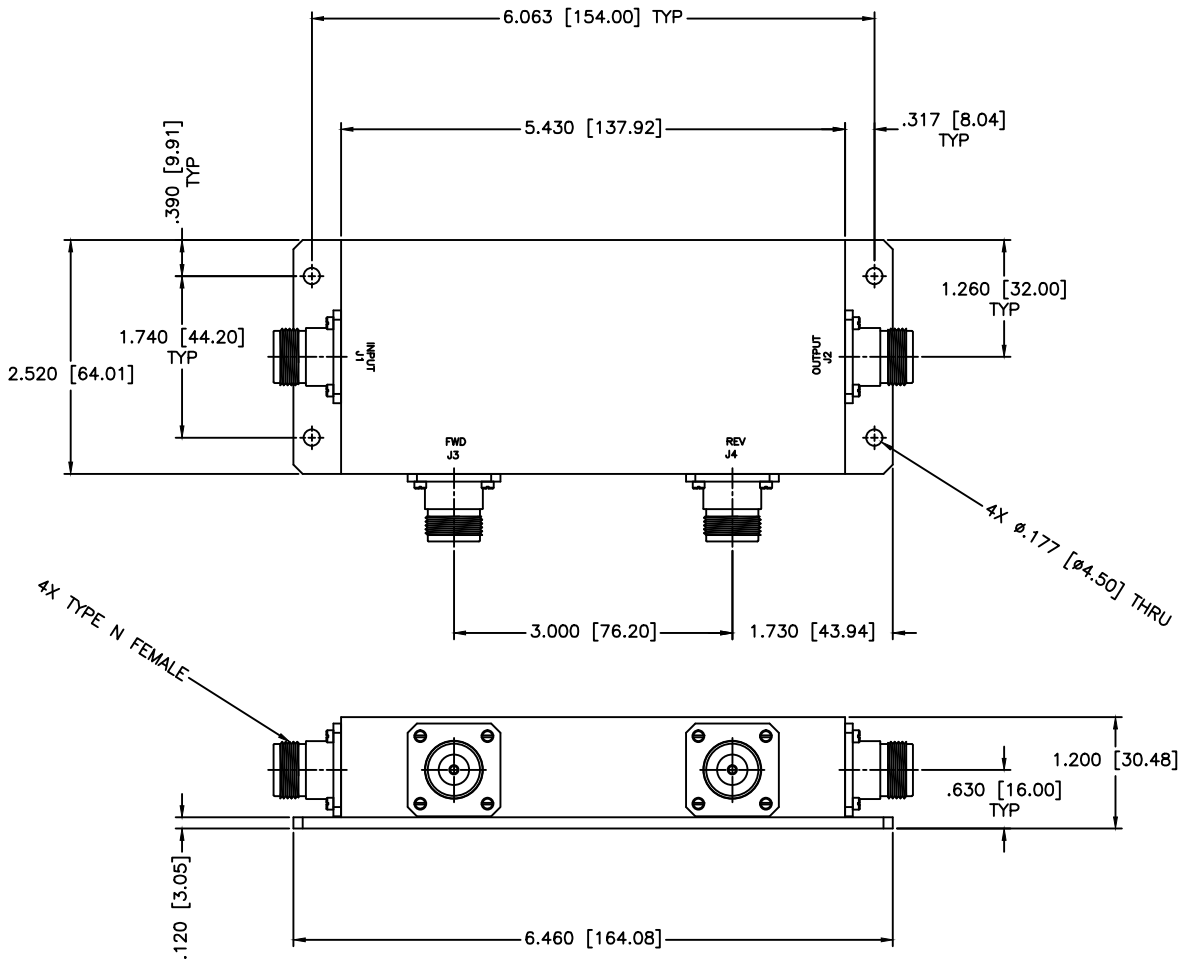

SPECIFICATIONS

FREQUENCY RANGE:	0.5–32 MHz
FREQUENCY SENSITIVITY:	±0.30dB
INSERTION LOSS:	0.20dB Max.
DIRECTIVITY:	25dB Min.
VSWR PRIME LINE:	1.10:1 Max.
POWER:	3,000 Watts

MATERIAL:

DRAWN: Paiboon Luekhamhan — DATE: 03-27-1999

APPROVED: T. Nguyen — DATE: 03-27-1999

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.02 ±.008
ANGLE: ±1/2°

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

MCLI
MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

SCALE: N/A
SHEET: N/A

DRAWING TITLE: HIGH POWER DUAL DIRECTIONAL COUPLER

PART NO. HDL-18-40

CAGE CODE: 0D2L5
SIZE: C
REV: N/A
DWG NO. 81249

DO NOT SCALE THE DRAWING