SCW-SMSM024-F1-A

Rev. 1.0

SMA (M) to SMA (M) Coaxial Cable, Flexible, Armored, 24”

Description:

Model SCW-SMSM024-F1-A is a 24” long, flexible, armored coaxial cable with SMA male connectors that cover the frequency range of DC to 26.5 GHz. The coaxial cable utilizes high performance material and a precision manufacturing process to guarantee superior microwave performance and mechanical durability. The impedance of the cable is 50 ohms. Other lengths are offered under different models.



Customizable Length

Features:

- High Return Loss
- Low Insertion Loss
- Flexible and Durable

Applications:

- Test Lab
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		26.5 GHz
Insertion Loss @ 3 GHz		< 0.5 dB	
Insertion Loss @ 6 GHz		< 0.8 dB	
Insertion Loss @ 12 GHz		< 1.2 dB	
Insertion Loss @ 18 GHz		< 1.5 dB	
Insertion Loss @ 26.5 GHz		< 1.9 dB	
Return Loss @ 26.5 GHz		20 dB	
Impedance		50 Ω	
Breakdown Voltage			1000 Volts
Radiation Shielding		90 dB	
Power Handling @ 26.5 GHz			105 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:

Item	Specification
Connectors	SMA Male
Connector Contact Material/Plating	Brass/Gold Plating Per MIL-G-45204
Connector / Cable Insulation Layer Material	Passivated Stainless Steel / PTFE
Cable Jacket Material	FEP
Cable Outer Diameter	0.181”
Length	24”
Minimum Bending Radius	0.79”
Weight	0.9 Oz
Outline	CW-SS-F8-A


www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

Copyright © 2019 by SAGE Millimeter, Inc.


SAGE Millimeter, Inc.

SMA (M) to SMA (M) Coaxial Cable, Flexible, Armored, 24”

Typical Insertion Loss & Return Loss vs. Frequency

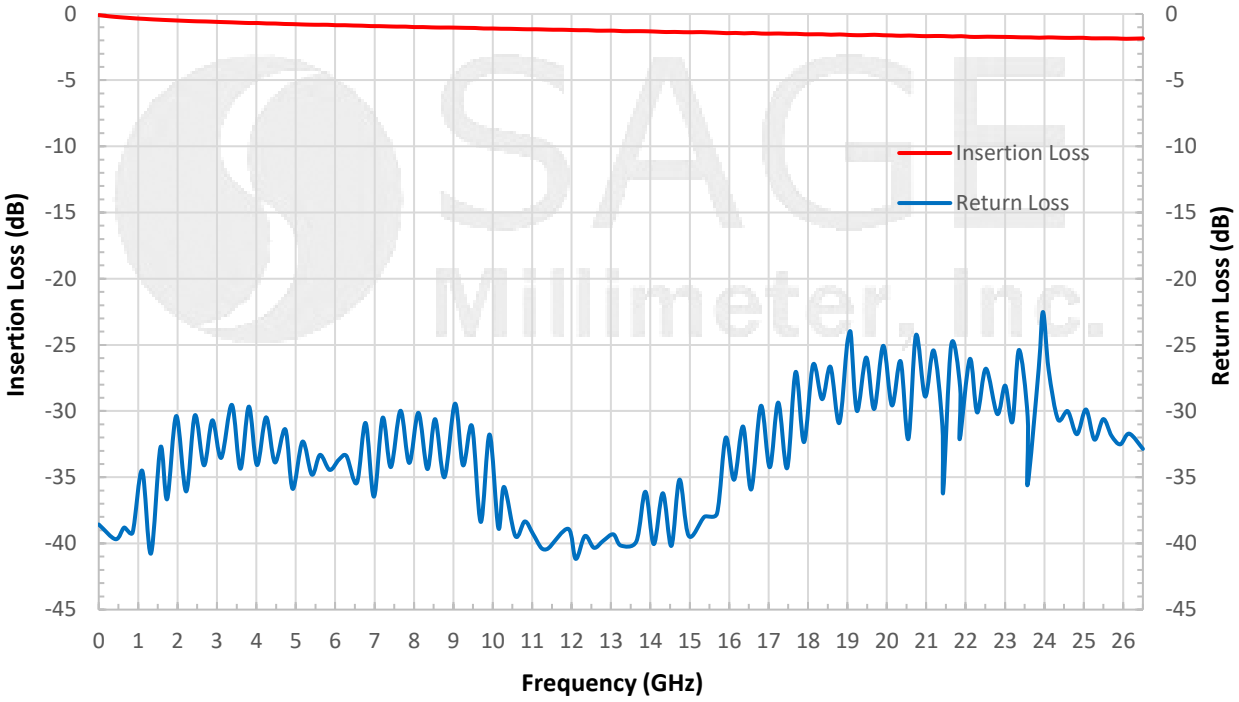

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

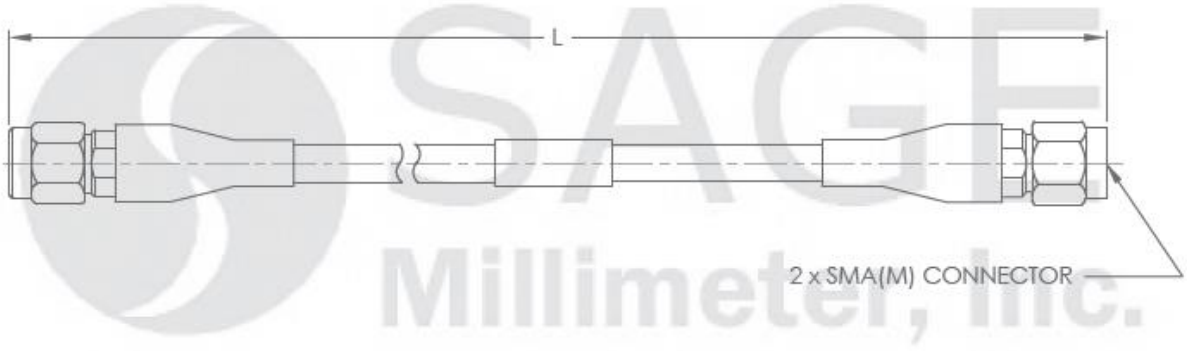

Note:

- Length “L” can be customizable.
- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-U3, is highly recommended.**

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

Copyright © 2019 by SAGE Millimeter, Inc.

SAGE Millimeter, Inc.