# SCW-2M2M006-F1

Rev. 1.0

## 2.4 mm (M) to 2.4 mm (M) Coaxial Cable, Flexible, 6”

### Description:

**Model SCW-2M2M006-F1** is a 6” long, flexible, coaxial cable with 2.4 mm male connectors that cover the frequency range of DC to 50 GHz. The coaxial cable utilizes high performance material and a precision manufacturing process to guarantee superior microwave performance and mechanical durability. The impedance of the cable is 50 ohms. Other lengths are offered under different models.



### Features:

- High Return Loss
- Low Insertion Loss
- Flexible and Durable

### Applications:

- Test Lab
- Sub-assemblies

### Electrical Specifications:

| Parameter | Minimum | Typical | Maximum |
|---|---|---|---|
| Frequency | DC | | 50 GHz |
| Insertion Loss @ 18 GHz | | < 0.6 dB | |
| Insertion Loss @ 26.5 GHz | | < 0.7 dB | |
| Insertion Loss @ 40 GHz | | < 1.0 dB | |
| Insertion Loss @ 50 GHz | | < 1.1 dB | |
| Return Loss @ 50 GHz | | 14 dB | |
| Impedance | | 50 Ω | |
| Breakdown Voltage | | | 500 Volts |
| Radiation Shielding | | 90 dB | |
| Power Handling @ 40 GHz | | | 15 W (CW) |
| Specification Temperature | | +25 °C | |
| Operating Temperature | -40 °C | | +85 °C |

### Mechanical Specifications:

| Item | Specification |
|---|---|
| Connectors | 2.4 mm Male |
| Connector Contact Material/Plating | Beryllium Copper (BeCu)/Gold Plating Per MIL-G-45204 |
| Connector / Cable Insulation Layer Material | Passivated Stainless Steel / PEEK/PEI |
| Cable Jacket Material | PFA |
| Cable Outer Diameter | 0.087” |
| Length | 6” |
| Minimum Bending Radius | 0.5” |
| Repeated Bending Radius | 0.867” |
| Weight | 0.7 Oz |
| Outline | CW-22-F8 |


www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

Copyright © 2018 by SAGE Millimeter, Inc.




SAGE Millimeter, Inc.

## 2.4 mm (M) to 2.4 mm (M) Coaxial Cable, Flexible, 6”

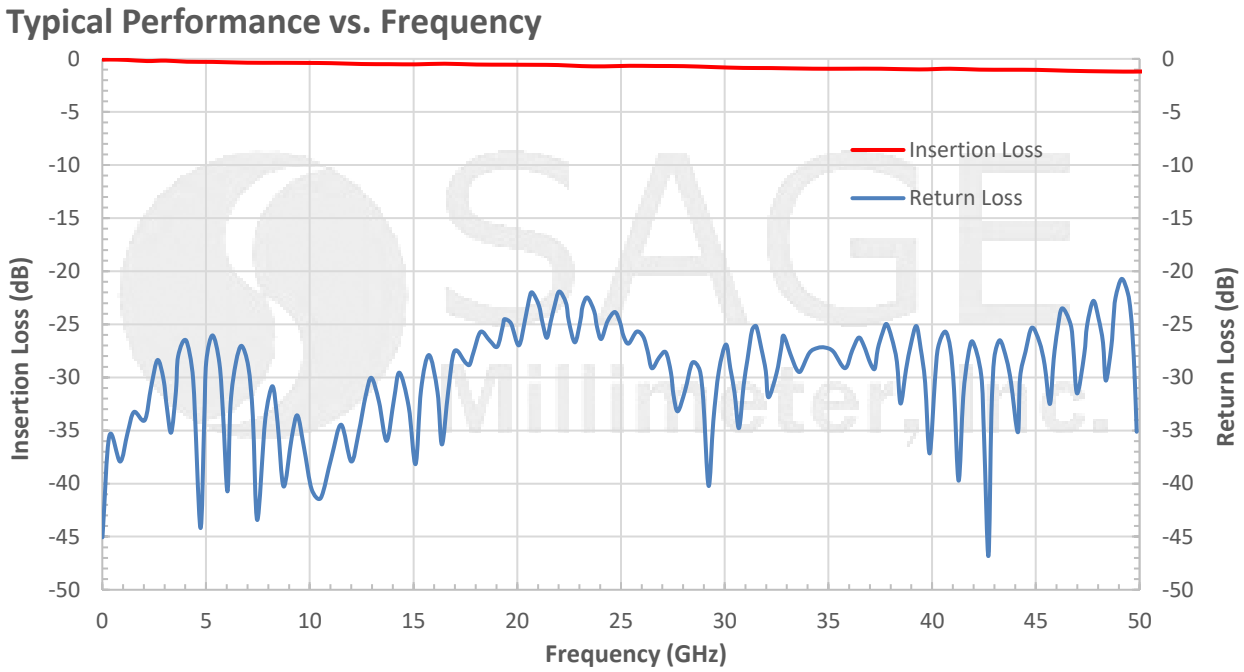


**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches)

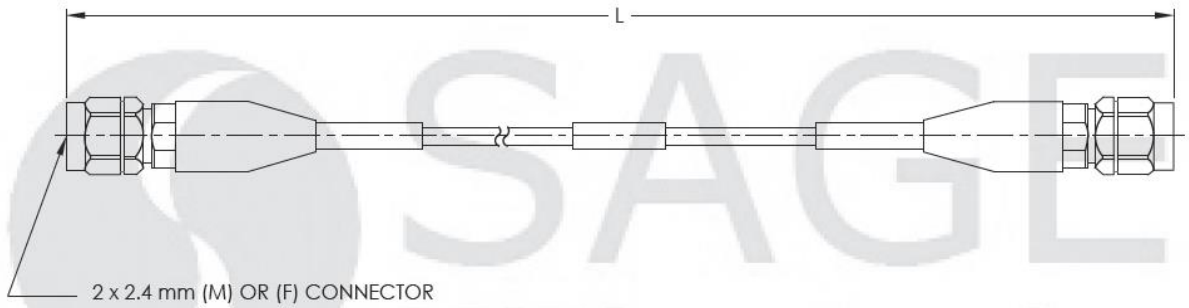


**Note:**

- Length “L” can be customizable.
- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-U3, is highly recommended.**

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

Copyright © 2018 by SAGE Millimeter, Inc.