

1.35 mm (M) to 1.35 mm (M) Coaxial Cable, Flexible, 3", Phase Matched

Description:

Model SCW-EMEM003-F1-PM is a 3" long, flexible, phase matched coaxial cable with 1.35 mm (E) male connectors that cover the frequency range of DC to 90 GHz. The coaxial cable utilizes the highest quality test instrumentation grade cable and a precision manufacturing process to guarantee superior microwave performance and mechanical durability. The impedance of the cable is 50 ohms. Other lengths are offered under different models.



Features:

- High Return Loss
- Low Insertion Loss
- Flexible and Durable

Applications:

- Test Lab
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		90 GHz
Insertion Loss		1.9 dB	
Return Loss		14 dB	
Impedance		50 Ω	
Phase Match (Unit to Unit)		$\pm 45^\circ$	
Power Handling			2 W (CW)
Specification Temperature		+25 $^\circ\text{C}$	
Operating Temperature	-40 $^\circ\text{C}$		+85 $^\circ\text{C}$


Mechanical Specifications:

Item	Specification
Connectors	1.35 mm Male
Connector Contact Material/Plating	Beryllium Copper (BeCu)/Gold Plating Per MIL-G-45204
Connector / Cable Insulation Layer Material	Passivated Stainless Steel / PEI
Cable Jacket Material	Fluorinated Ethylene Propylene (FEP)
Cable Outer Diameter	0.057"
Length	3"
Minimum Bending Radius	0.25"
Weight	0.6 Oz
Outline	CW-EE-F10




1.35 mm (M) to 1.35 mm (M) Coaxial Cable, Flexible, 3", Phase Matched

Typical Performance vs. Frequency

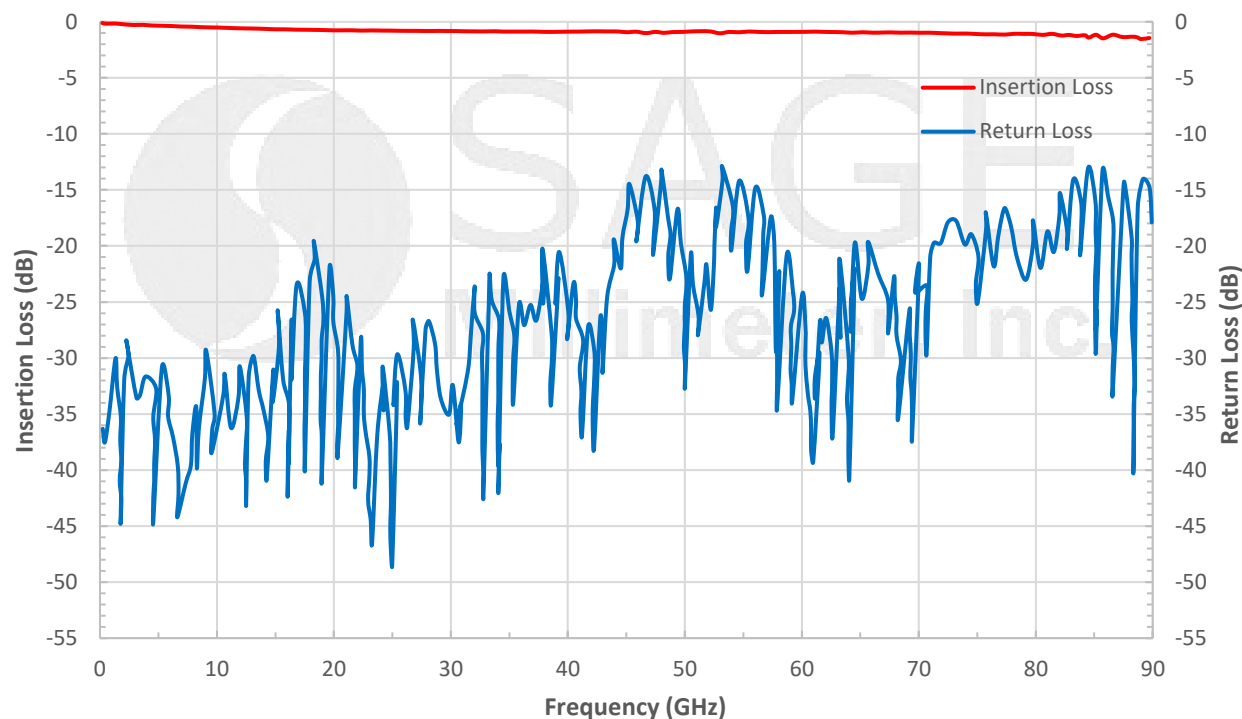

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

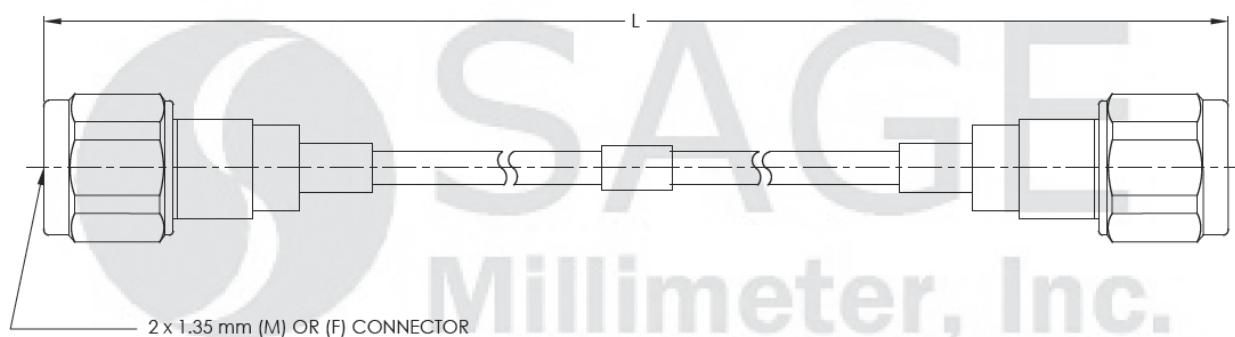

Note:

- Length "L" can be customizable.
- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-U3, is highly recommended.**



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com