

26.8 GHz Integrated Transmitter Module, Space Qualified

Description:

Model SST-2730223027-28-S1 is a Ka Band compact transmitter module operating at 26.8 GHz. This product is designed and manufactured for small satellite applications. The module incorporates a phase locked oscillator to convert 1.0 GHz signal to 26.8 GHz signal. A robust filtering system greatly reduces the harmonic and spurious levels, making the module a great choice for ground, ground to satellite and satellite to satellite communication applications.



Features:

- 26.8 GHz Operation
- High Linear Output Power
- Space Qualified

Applications:

- Communication Systems
- Small Satellite Systems
- CubeSat Systems

Electrical Specifications:


Parameter	Minimum	Typical	Maximum
TX Frequency Range	26.7 GHz		26.9 GHz
TX Output P_{1dB}	+ 27 dBm	+29 dBm	
IF Frequency Range	0.9 GHz		1.1 GHz
IF to TX Gain		23 dB	
IF P_{in}	0 dBm	+4 dBm	+8 dBm
IF Input VSWR		1.5:1	
Harmonics		-50 dBc	
Spurious		-60 dBc	
Phase Noise	-80 dBc/Hz @ 1 KHz; -90 dBc/Hz @ 10 KHz and -100 dBc/Hz @ 100 KHz		
DC Supply Voltage		+8 V_{DC} /1.5 A	
Specification Temperature		+25 °C	
Operating Temperature	-25 °C		+65 °C

Mechanical Specifications:

Item	Specification
IF Input	SMA(F)
RF Output	WR-28 Waveguide with UG-599/U Flange
Bias and Others	Micro-D, 15 Pins (Female)
Weight	17.3 Oz
Size	3.68" (W) X 3.44" (L) X 1.2" (H)
Outline	ST-SA-CS

26.8 GHz Integrated Transmitter Module, Space Qualified

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

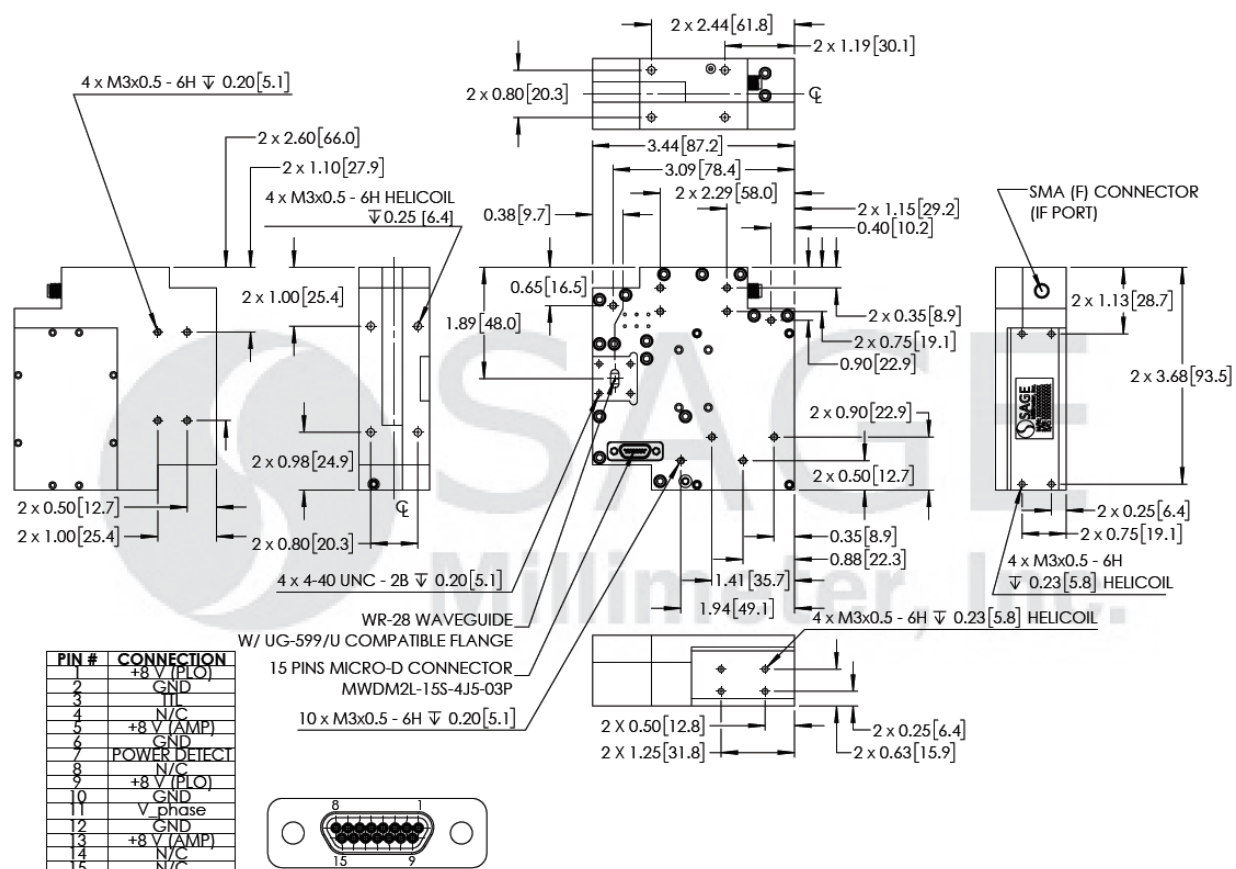

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +85°C. Use additional heatsink or fan if necessary.