

## Coaxial Bandpass Filter, 12 to 16 GHz

### Description:

**SCF-14304360-SFSF-B3** is a coaxial bandpass filter with a passband frequency of 12 to 16 GHz. The typical insertion loss of the bandpass filter is 1 dB and the passband ripple is  $\pm 0.3$  dB. The rejection frequencies are 10.5 GHz or less and 17.5 GHz or higher. The typical rejection is 60 dB and the typical passband return loss of the filter is 12 dB. The RF connectors of the the filter are SMA Female connectors. Other configurations are available under different model numbers.



### Features:

- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts
- Field Replaceable RF Connectors

### Applications:

- Instrumentations
- Sub-assemblies
- System Integrations

### Electrical Specifications:


Parameter	Minimum	Typical	Maximum
Passband Frequency	12 GHz		16 GHz
Passband Insertion Loss		1 dB	
Passband Ripple		$\pm 0.3$ dB	
Rejection Frequency, Low Side	DC		10.5 GHz
Rejection, Low Side		60 dB	
Rejection Frequency, High Side	17.5 GHz		
Rejection, High Side		60 dB	
Passband Return Loss		12 dB	
Impedance		50 $\Omega$	
Power Handling			5 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

### Mechanical Specifications:


Item	Specifications
RF Port 1	SMA Female
RF Port 2	SMA Female
Material	Aluminum
Finish	Black Paint
Outline	CF-B6-LJ3

## Coaxial Bandpass Filter, 12 to 16 GHz

## Typical Performance vs. Frequency

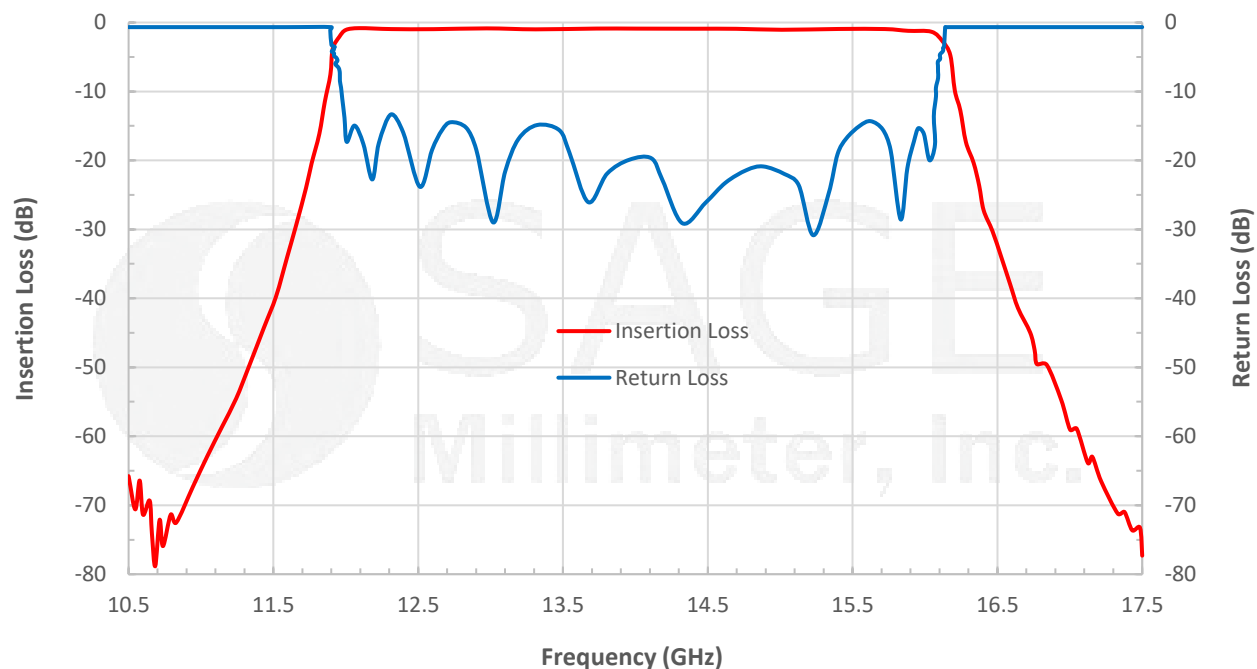

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

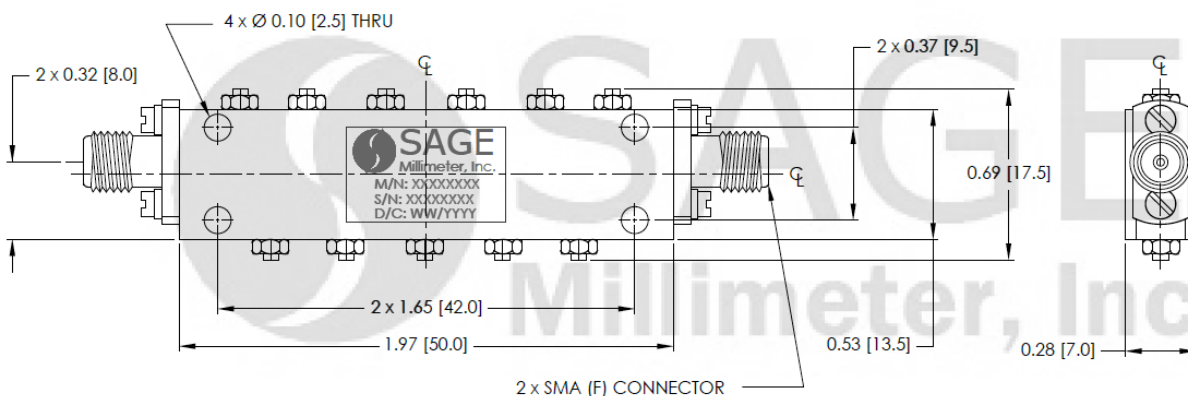**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-U3, is highly recommended.**