

D-Band Fixed Attenuator, 10 dB

Description:

Model STA-10-06-F2 is a 10 dB fixed attenuator that is used in millimeterwave systems and operates from 110 to 170 GHz. The attenuator has a fixed attenuation value of 10 dB at the center frequency, 140 GHz. While the attenuator is designed and fabricated for full waveguide band applications, the attenuation value of this model does show a minor slope within the band due to its distinct mechanical configuration. Various attenuation values are available under different model numbers.



Features:

- Full Band Coverage
- Low Cost
- Accurate Attenuation Value at Center Frequency

Applications:

- Test Lab
- Instrumentations
- System Integration

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	110 GHz		170 GHz
Attenuation @ 140 GHz		10 dB	
Return Loss		16 dB	
Power Handling			0.5 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


Mechanical Specifications:

Item	Specification
RF Ports	WR-06 Waveguide with UG-387/U-M Flange
Setting	Fixed
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated Waveguide Faces; Black Painted Body
Insertion Length	2.0"
Outline	TA-FD-BX1



D-Band Fixed Attenuator, 10 dB

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

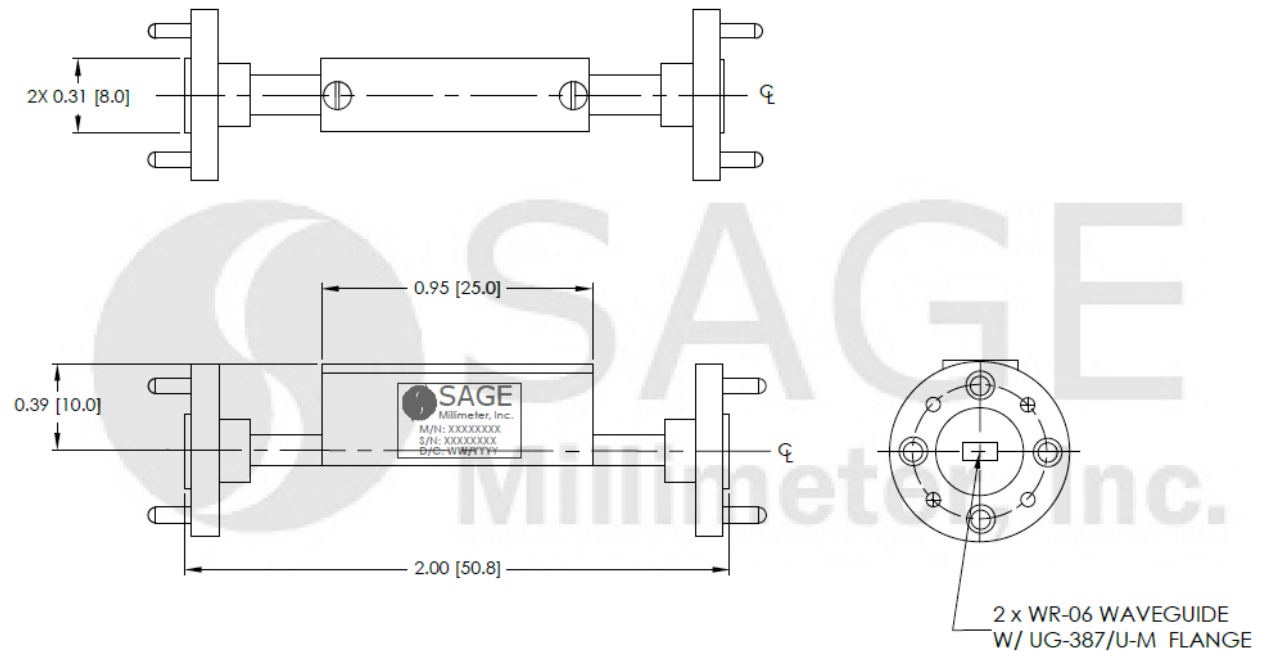

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.