

Waveguide Highpass Filter, E Band

Description:

Model SWF-67363340-12-H1 is an E band waveguide highpass filter with a passband frequency of 67 GHz and higher and a rejection frequency from DC to 65 GHz. The filter provides a nominal insertion loss of 1.0 dB across its passband with a low ripple and a typical rejection of 40 dB. Since the low end cutoff frequency can be changed by modifying the design, custom designs can be offered under different model numbers.



Features:

- Low Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communication Systems
- Radar Systems
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	67 GHz		
Passband Insertion Loss		1.0 dB	
Passband Ripple		±0.3 dB	
Rejection Frequency	DC		63 GHz
Rejection		40 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C


Mechanical Specifications:

Item	Specification
Waveguide	WR-12 with UG-387/U Flange
Size	1.20" (L) X 0.75" (Ø)
Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	WF-HE




Waveguide Highpass Filter, E Band

Typical Insertion Loss vs. Frequency

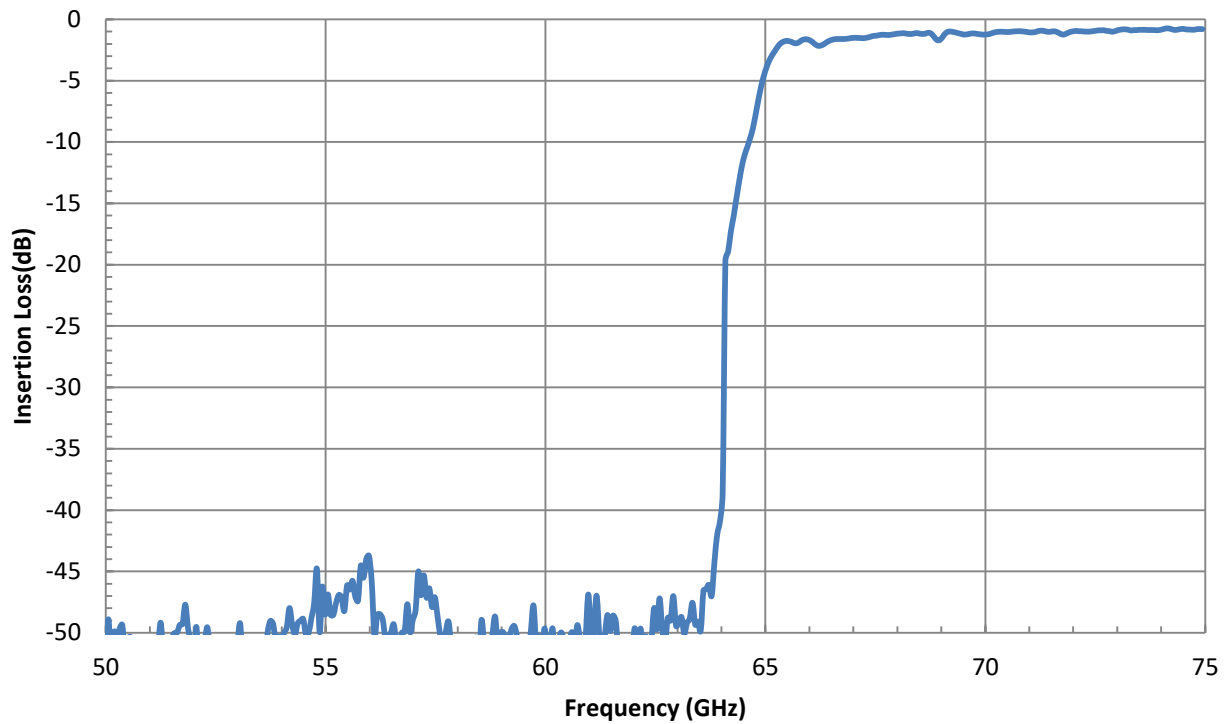

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

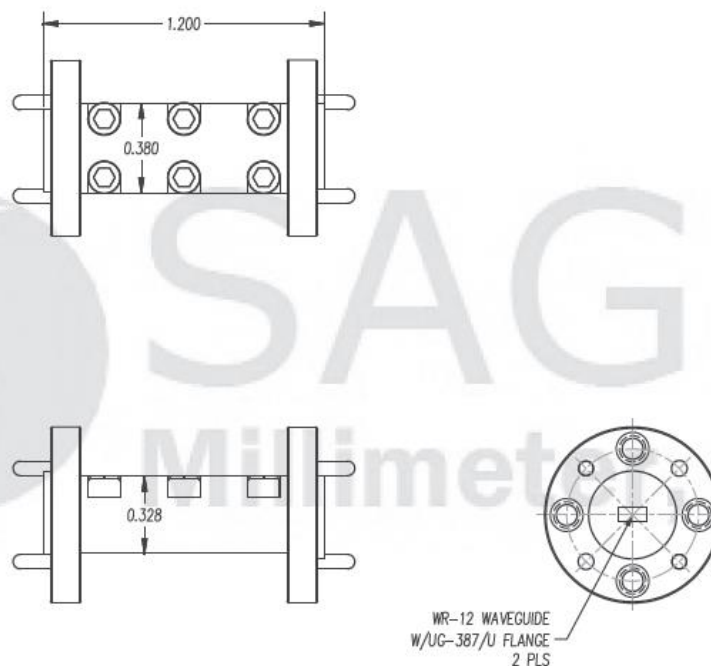

Waveguide Highpass Filter, E Band

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.

