


Waveguide Crossguide Coupler, W Band, 20 dB

Description:

Model SWX-92396320-10-4B is a four-port, split block crossguide coupler that is offered for power sampling where directivity is of concern. Compared to a multi-hole directional coupler, crossguide couplers offer lower insertion loss and a smaller form factor and insertion length. This model operates between 92 to 96 GHz with a 20 dB typical coupling level, 0.8 dB nominal insertion loss, and 15 dB typical directivity. The input, output, and coupled ports are all WR-10 waveguides with UG-387/U-M flanges.

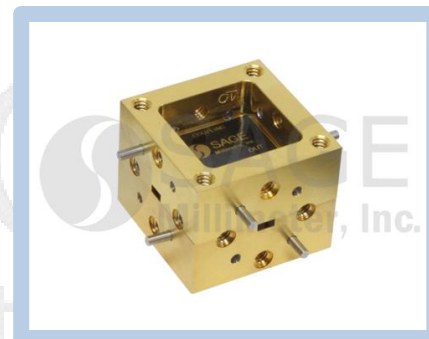

Features:

- Low Insertion Loss
- Moderate Directivity
- Four Port Configuration

Applications:

- Test Labs
- Test Instrumentation
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	92 GHz		96 GHz
Coupling Level		20.0 dB	
Insertion Loss		0.8 dB	
Directivity		15.0 dB	
Input/Output VSWR		1.1:1	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C


Mechanical Specifications:

Item	Specification
Input	WR-10 waveguide with UG-387/U-M flange
Output	WR-10 waveguide with UG-387/U-M flange
Coupled	WR-10 waveguide with UG-387/U-M flange
Size	1.00" (L) x 1.00" (W) x 0.81" (H)
Material	Aluminum
Finish	Gold Plated
Weight	0.8 Oz
Outline	WX-BW-4




Waveguide Crossguide Coupler, W Band, 20 dB

Typical Insertion Loss and Coupling vs. Frequency

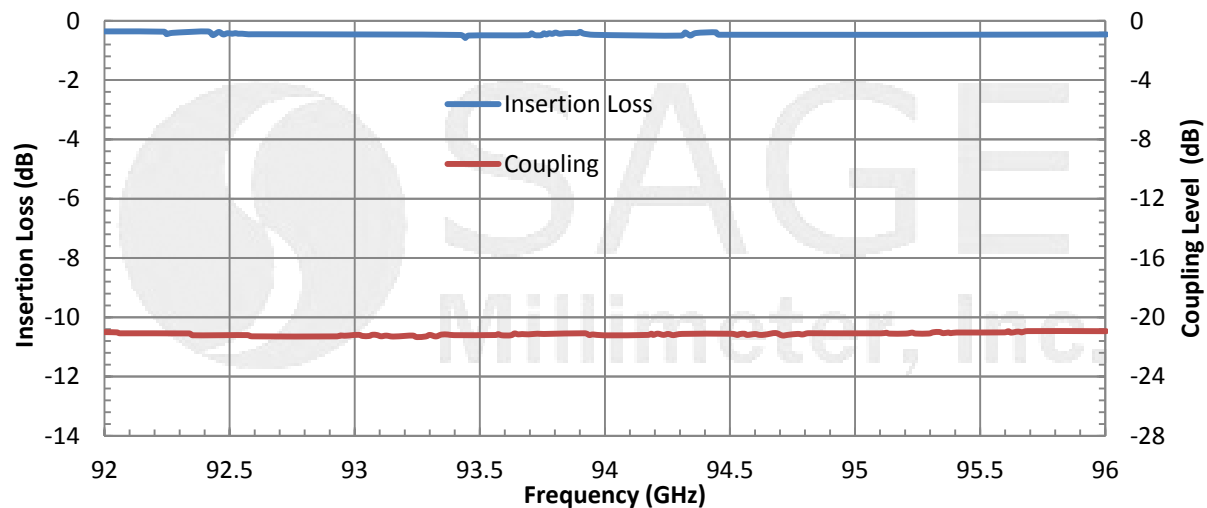

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

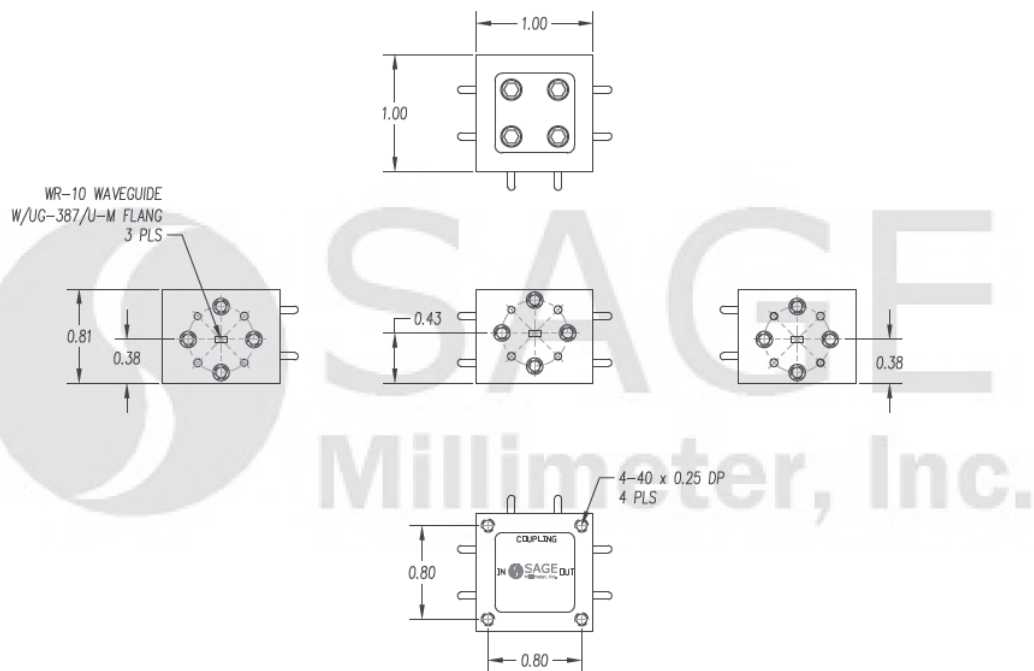**Note:**

- All data was presented using a limited sample lot. Actual data may vary unit to unit.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com