

Waveguide Highpass Filter, U Band, Pass Frequency 44 GHz

Description:

Model SWF-44340340-19-H1 is a U band waveguide highpass filter with a passband frequency of 44 GHz and higher and a rejection frequency from DC to 40 GHz. The filter provides a nominal insertion loss of 1.0 dB across its passband and a typical rejection of 40 dB. Since the low end cutoff frequency can be changed by modifying the design, custom designs can be offered under different model numbers.



Features:

- Low Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communication Systems
- Radar Systems
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	44 GHz		
Passband Insertion Loss		1.0 dB	
Rejection Frequency	DC		40 GHz
Rejection		40 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C


Mechanical Specifications:

Item	Specification
Waveguide	WR-19 with UG-383/U-M Flange
Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	2.20" (L) X 1.13" (Ø)
Outline	WF-HU




Waveguide Highpass Filter, U Band, Pass Frequency 44 GHz

Typical Insertion Loss vs. Frequency

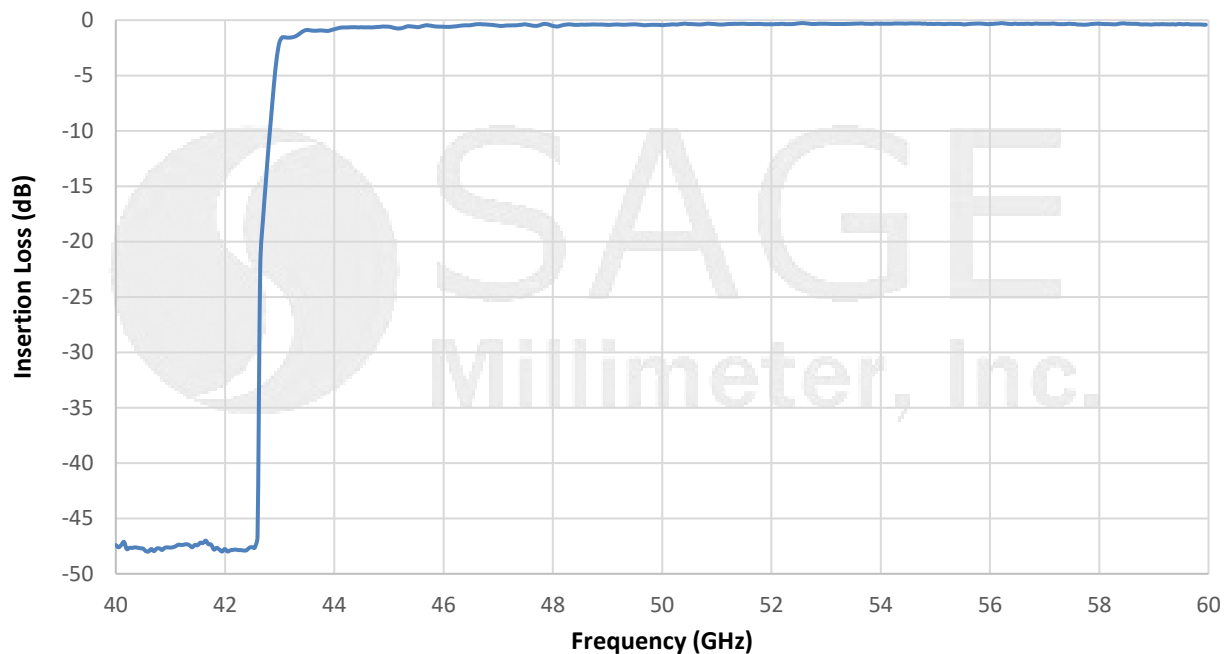

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

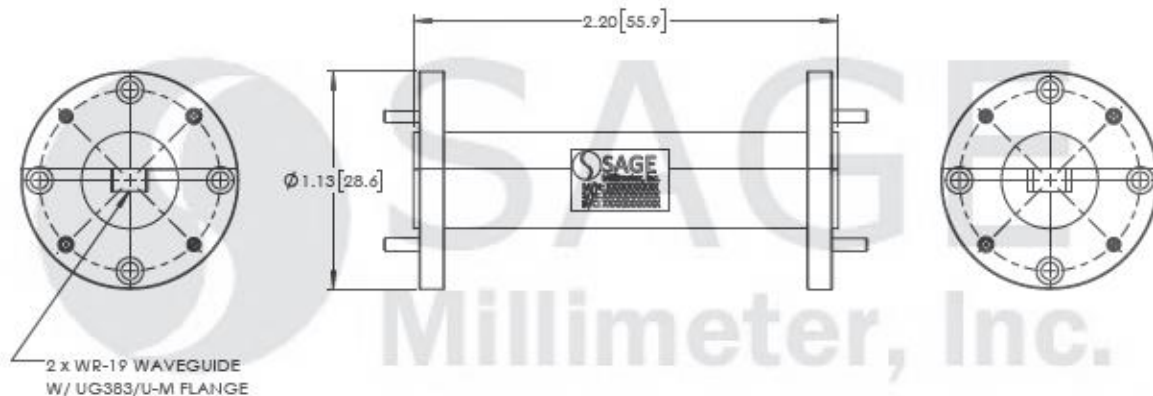

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com