

## Waveguide Highpass Filter, V Band, Anti-Cocking

### Description:

**Model SWF-55350340-15-H1-A** is a V band waveguide highpass filter with a passband frequency of 55 GHz and higher and a rejection frequency from DC to 50 GHz. The filter provides a nominal insertion loss of 0.8 dB across its passband with a low ripple and a typical rejection of 40 dB. The waveguide interface for the filter incorporates UG-385/U anti-cocking flanges to enhance waveguide interface contact and reduce leakage. Since the low end cutoff frequency can be changed by modifying the design, custom designs can be offered under different model numbers.



### Features:

- Low Cost
- Low Insertion Loss
- High Rejection

### Applications:

- IEEE 802.11ad WiGig Systems
- Communication Systems
- Radar Systems
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	55 GHz		
Passband Insertion Loss		0.8 dB	
Passband Ripple		±0.3 dB	
Rejection Frequency	DC		50 GHz
Rejection @ 52 GHz		30 dB	
Rejection @ 50 GHz		40 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C


### Mechanical Specifications:

Item	Specification
Waveguide	WR-15 with UG-385/U Anti-Cocking Flange
Size	1.20" (L) X 0.75" (Ø)
Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	WF-HV-A



## Waveguide Highpass Filter, V Band, Anti-Cocking

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

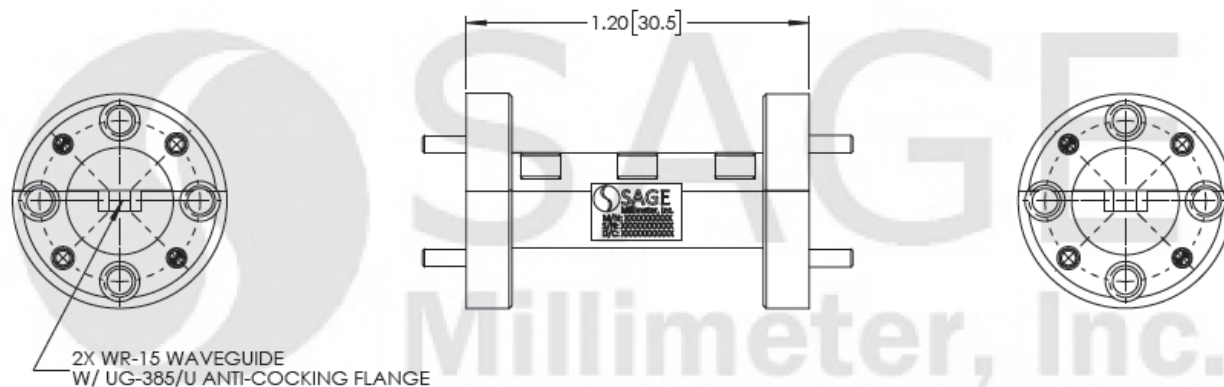

**Note:**

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- Any foreign objects in the waveguide will degrade performance and/or damage the device.

