

RF AMPLIFIER

MODEL *TM3013*

Available as: TM3013, 4 Pin TO-8 (T4)
 TN3013, 4 Pin Surface Mount (SM3)
 FP3013, 4 Pin Flatpack (FP4)
 BX3013, Connectorized Housing (H1)

Features

- High Output Power with Low Noise Figure
- High Third Order Intercept: +37 dBm Typical
- Operating Temp. - 55 °C to + 85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 1700 MHz	10 - 1700 MHz
Gain (dB)	14.0	13.0 Min.
Power @ 1 dB Comp. (dBm)	>+23.0	+22.5 Min.
Reverse Isolation (dB)	- 20	-18 Max.
VSWR In	<1.8:1	2:0:1 Max.
Out	<1.5:1	2:0:1 Max.
Noise Figure (dB) *	<2.5	3.2 Max.
Power Vdc	+15	+15
mA	108	115 Max.

Note: Care should always be taken to effectively ground the case of each unit.

* Noise Figure is greater below 50 MHz

Typical Intermodulation Performance at 25 ° C


Second Order Harmonic Intercept Point +56 dBm (Typ.)
 Second Order Two Tone Intercept Point +50 dBm (Typ.)
 Third Order Two Tone Intercept Point +37 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 20 dBm
 Short Term RF Input Power 150 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Legend ——— + 25 °C - - - + 85 °C - - - - -55 °C

Typical Performance Data

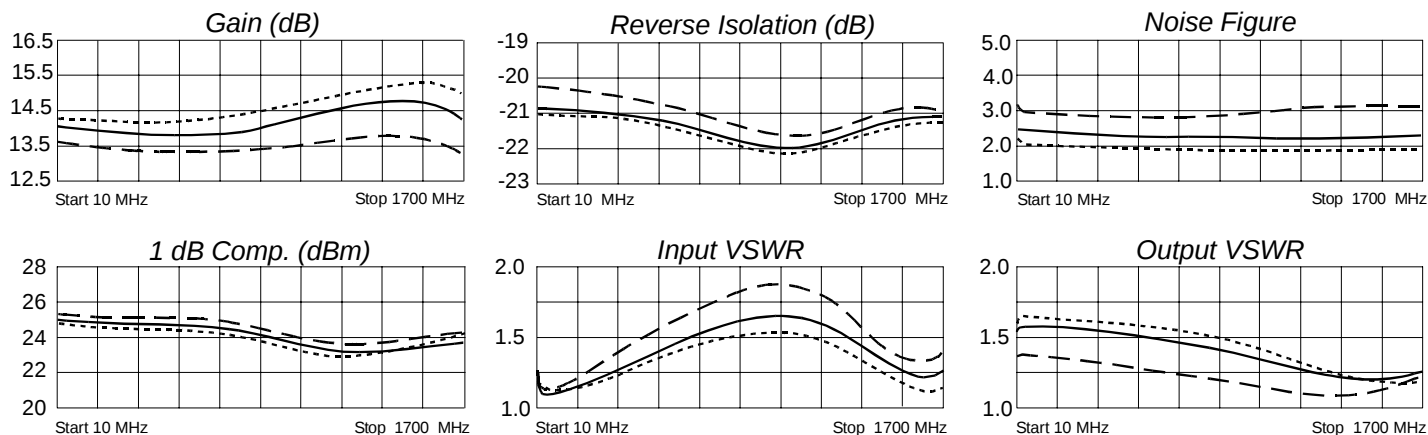

Linear S-Parameters

Freq. MHz	---S11---		---S21---		---S12---		---S22---	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	.09	-85	5.04	-172	.09	0	.21	1.25
200	.07	-103	5.04	161	.09	-8	.22	1.27
500	.16	-124	5.05	132	.09	-20	.20	1.29
800	.21	-147	5.09	103	.09	-32	.17	1.29
1100	.23	-176	5.19	72	.09	-45	.12	1.28
1400	.17	139	5.38	36	.09	-60	.10	1.24
1700	.14	34	5.15	-7	.09	-83	.17	1.27



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 03/15/06

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001