


**FMP-25G36.7G-03-KWR10** is a high performance, compact size, x3 frequency multiplier, with input frequency from 25GHz to 36.67GHz, and it could handle 23dBm input power with very compact size. We could supply various of frequency multiplier covering different frequency range, and our products are widely used a lot of applications.

## Mechanical Outline(Inch):

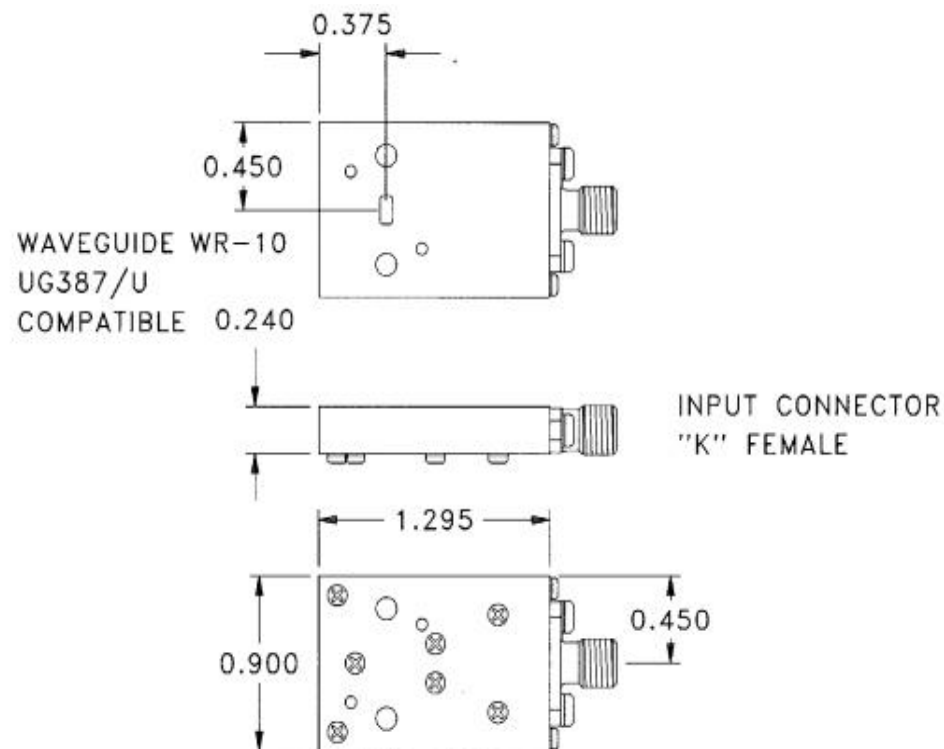


## Environmental Ratings:

Temperature:	-25°C to +71 °C Operating -65 °C to +100 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

## Specifications:

Input Frequency:	25 to 36.67 GHz
Multipliers:	3
Output Frequency:	75 to 110 GHz
Input Power:	23 dBm
Output Power:	-3 dBm
Input Connector:	2.92 Female
Output Connector:	waveguide WR10

### Passive Frequency Multiplier FMP-25G36.7G-03-KWR10

DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@connphy.com">sales@connphy.com</a>
CHECKRD:	DATE: 25/06/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.