


FMA-20G30G-02-KV is a high performance, compact size, x2 active frequency multiplier, with input frequency from 20GHz to 30GHz, and it could handle 10dBm input power, and output 10dBm, with a power supply of +12V @500mA, all in a very compact size. Some models could be built with smaller input power, please request.

Mechanical Outline(Inch):

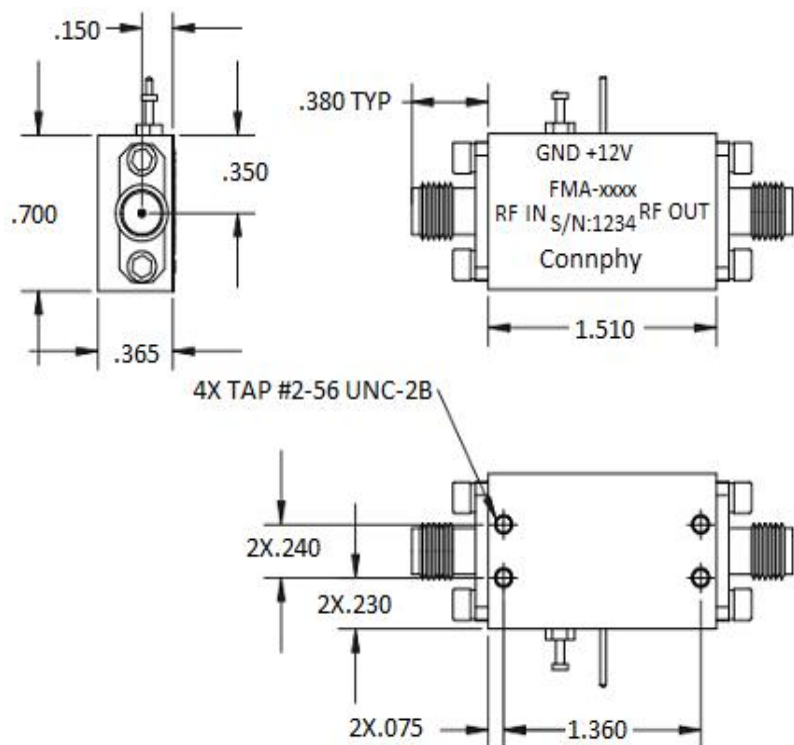


Environmental Ratings:

Temperature: -25°C to +71 °C Operating
 -65 °C to +100 °C Non-Operating
 Vibration: MIL-STD-202F, Method 204D Cond. B
 Altitude: MIL-STD-202F, Method 105C Cond. B
 Temperature Cycle: MIL-STD-202F, Method 107D Cond. A

Specifications:

Input Frequency: 20 to 30 GHz
 Multipliers: 2
 Output Frequency: 40 to 60 GHz
 Input Power: 10 dBm
 Output Power: 10 dBm
 Input Connector: 2.92 Female
 Output Connector: 1.85 Female
 Power Supply: +12V @500mA

Active Frequency Multiplier FMA-20G30G-02-KV

DRAWN:	DWG NO.:	REV CODE: Rev.1.0	<div>CONNPHY Microwave Inc. www.connphy.com sales@connphy.com</div>
CHECKRD:	DATE: 25/06/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.