
FMA-25G37.5G-02-KV is a high performance, compact size, x2 active frquency muliplier, with input frequency from 25GHz to 37.5GHz, and it could handle 10dBm input power, and output 10dBm, with a power supply of +12V @500mA, all in a very compact size. Some models could be built with smaller input power, please request.

Mechanical Outline(Inch):

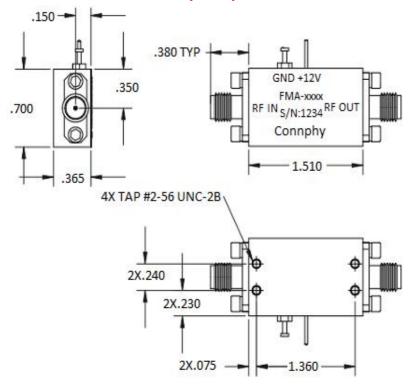

Environmental Ratings:

Temperature: -25°C to +71 °C Operating

-65 °C to +100 °C Non-Operating

Vibration: MIL-STD-202F, Method 204D Cond. B
Altitude: MIL-STD-202F, Method 105C Cond. B
Temperature Cycle: MIL-STD-202F, Method 107D Cond. A

Specifications:

Input Frequency: 25 to 37.5 GHz

Multipliers: 2

Output Frequency: 50 to 75 GHz
Input Power: 10 dBm
Output Power: 10 dBm
Input Connctor: 2.92 Female
Output Connector: 1.85 Female
Power Supply: +12V @500mA

Active Frequency Multiplier FMA-25G37.5G-02-KV			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	CONNPHY Microwave Inc.
CHECKRD:	DATE: 25/06/15	SHEET : 1 OF 1	www.connphy.com sales@connphy.com
ISSUED:	SIZE: A	SCALE : N / A	Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.