
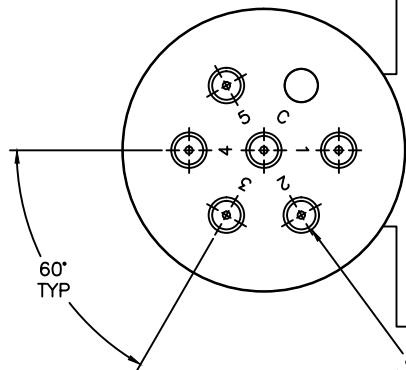


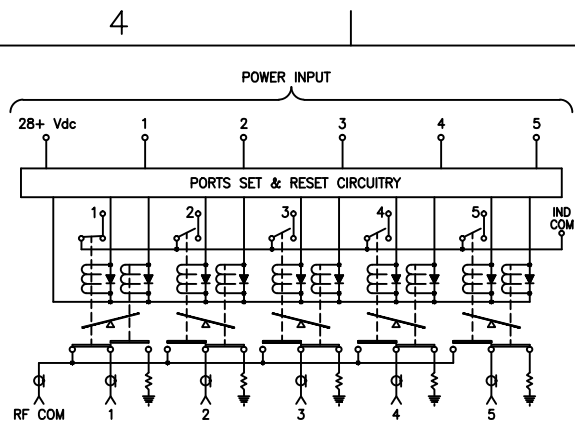

SPECIFICATIONS

FREQUENCY RANGE: DC-18.0 GHz
VSWR: 1.50:1 MAX.
INSERTION LOSS: 0.50dB MAX.
ISOLATION: 60dB MIN.

MECHANICAL


CONTACT: BREAK BEFORE MAKE
ACTUATOR: LATCHING
SWITCHING SPEED: 20 mSEC MAX

ELECTRICAL


ACTUATOR VOLTAGE: 28.0 Vdc (22.0-32.0 Vdc)
ACTUATOR CURRENT: 500mA MAX @ 28.0 Vdc
POWER HANDLING: 200W CW @ 1.0GHz
IMPEDANCE: 50 Ohms

ENVIRONMENTAL

OPERATING TEMP: -54°C to +90°C
SINE VIBRATION: 30 G'S rms
LIFE: 1,000,000 CYCLES
RANDOM VIBRATION: 20 G'S rms

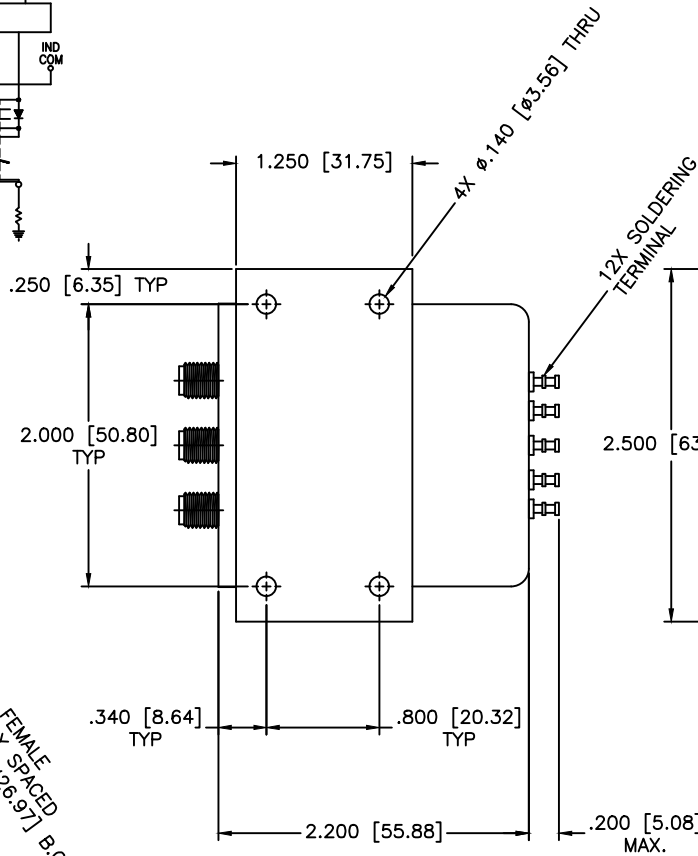

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

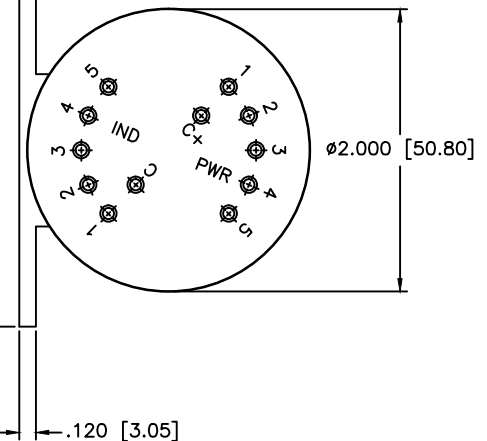

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE:		ELECTROMECHANICAL SWITCHES		
PART NO.		W5-7-LIS/28P		
CAGE CODE:	SIZE:	REV:	DWG. NO.	
OD2L5	N/A	N/A	84232	
DO NOT SCALE THE DRAWING				

DRAWN: Palboon Luekhamhan	DATE: 03-02-2009	APPROVED: T. Nguyen	DATE: 03-02-2009
---------------------------	------------------	---------------------	------------------