


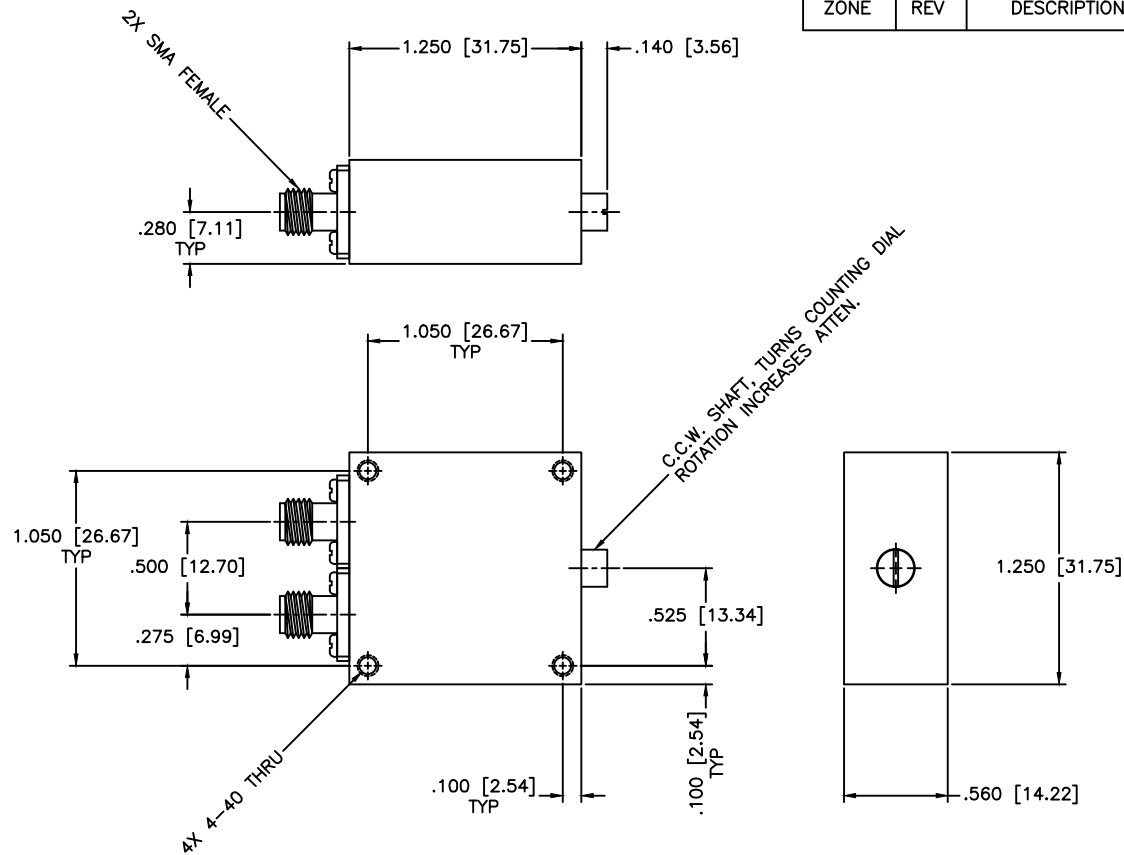

GENERAL SPECIFICATIONS

Mechanical
 Body: Aluminum
 Connectors: Stainless Steel
 Finish: Corrosion resistant epoxy coating, Grey
 Electrical
 RF Power: 0.5W Average
 RF Connectors: Per order
 Environmental
 Temperature: -24°C to +70°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paitoon Luekhamhan		DATE: 08-10-2016		DRAWING TITLE: MULTI-TURN CVA, STANDARD MODEL
APPROVED: T. Nguyen		DATE: 08-10-2016		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO. AM-X		
THIRD ANGLE PROJECTION		CAGE CODE: OD2L5	SIZE: A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. XXXXX