


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

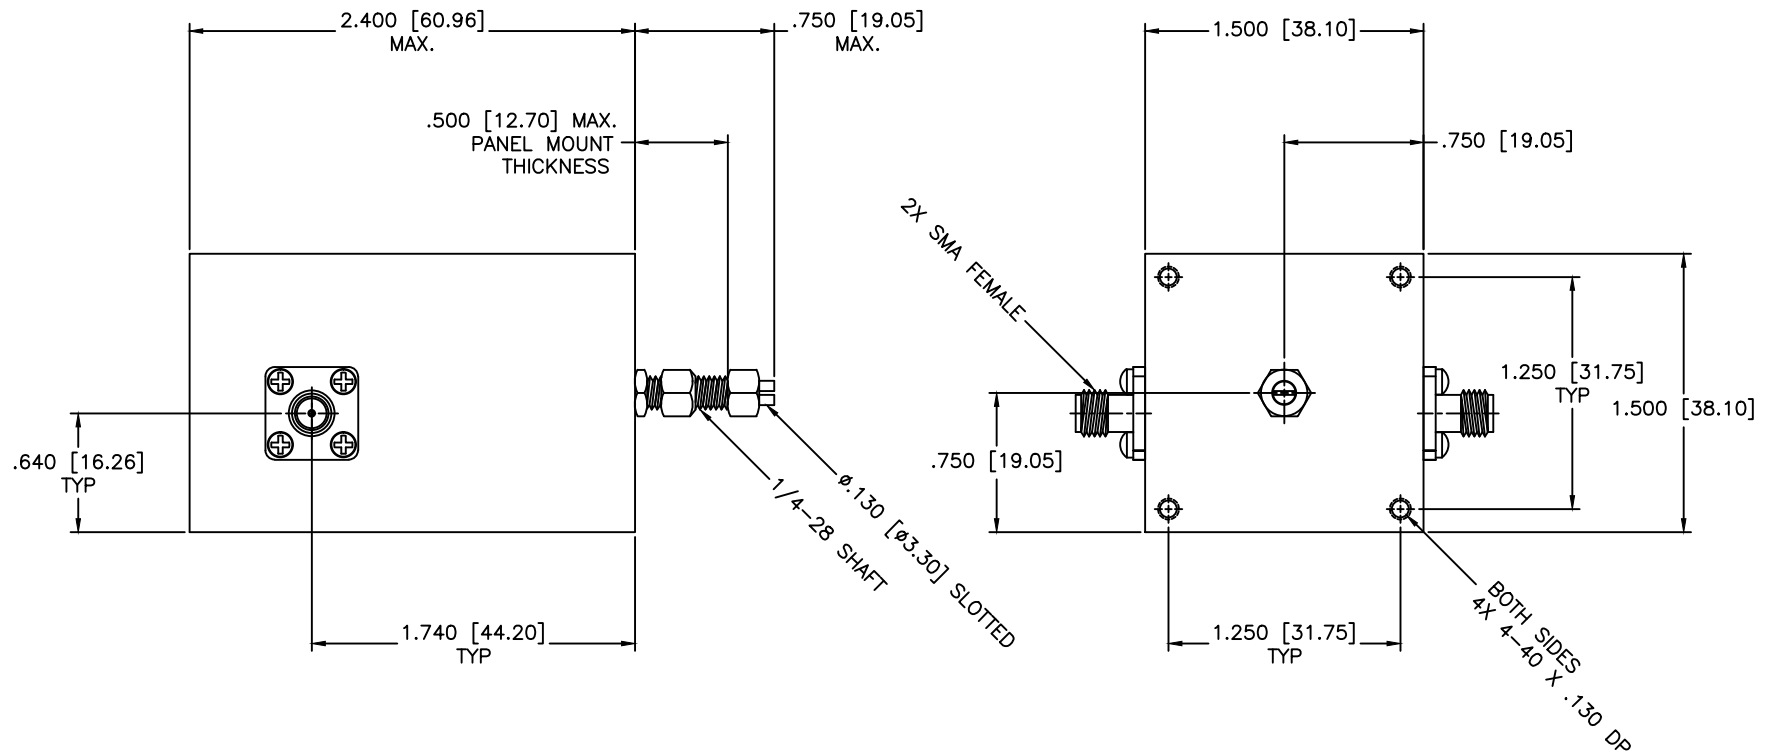

GENERAL SPECIFICATIONS

Mechanical

Body: Aluminum

Connectors: Stainless Steel

Finish: Corrosion resistant 316 stainless steel
epoxy coating IAW MIL-F-14072 Color Dusty Grey

Electrical

RF Power: 0.5W Average

RF Connectors:

50 ohm models: SMA Female (/BF For BNC Female)

75 ohm models: BNC Female

Connector Options: Type-N and other connectors available.

Configuration Options: Rear mounted connector adding /RM

Environmental

Temperature: -24°C to +70°C

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.05$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:		SHEET: N/A	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.		CONTINUOUSLY VARIABLE ATTENUATOR	
DRAWN: Paiboon Luekhamhan		DATE: 08-11-2016		AS-X			
APPROVED: T. Nguyen		DATE: 08-11-2016		CAGE CODE: OD2L5		SIZE: A	
		THIRD ANGLE PROJECTION 		REV: A		DWG NO. XXXXX	
				DO NOT SCALE THE DRAWING			