


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

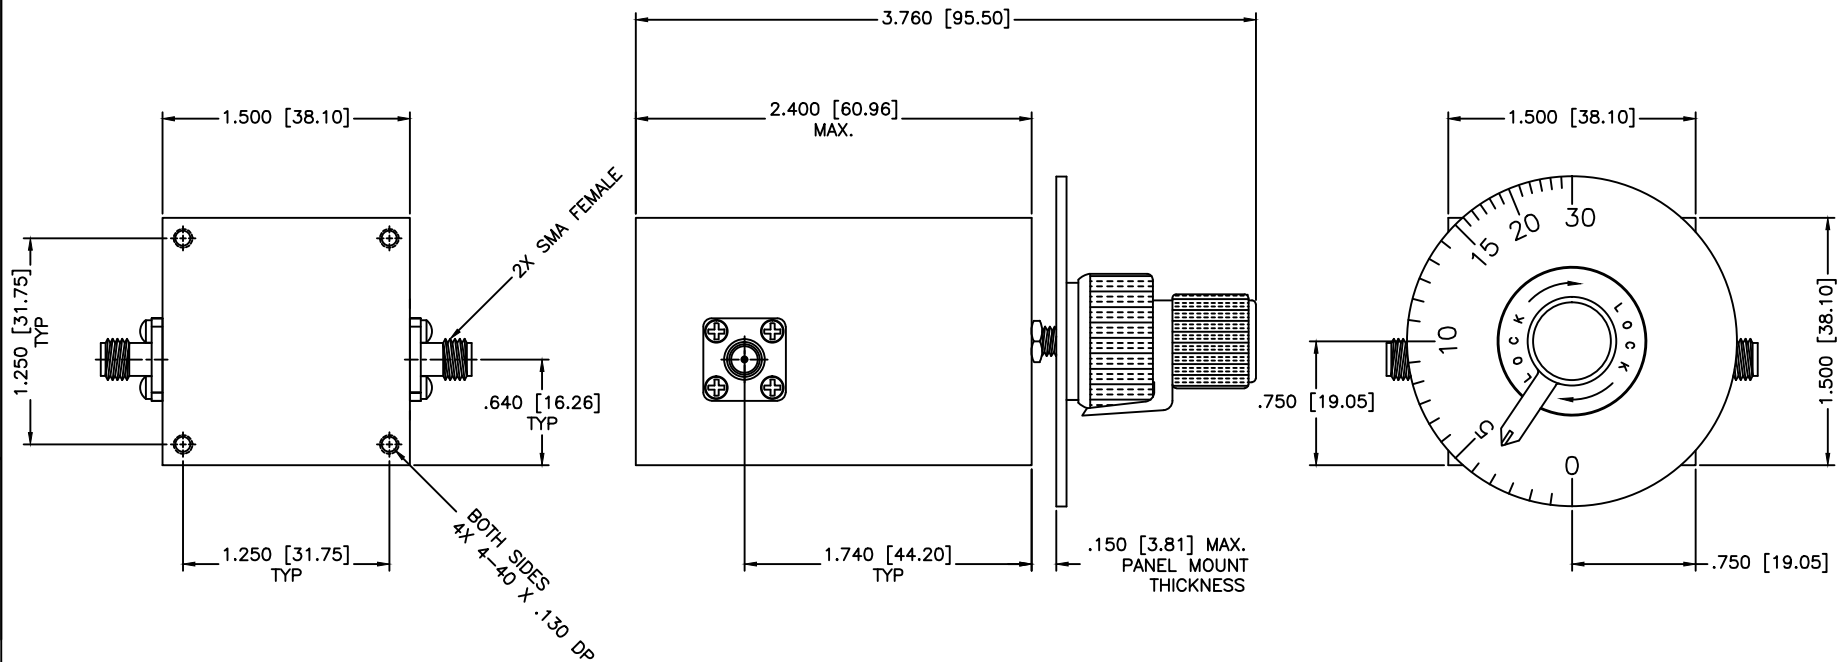

GENERAL SPECIFICATIONS

Mechanical

Body: Aluminum

Connectors: Stainless Steel

Finish: Corrosion resistant 316 stainless steel epoxy coating IAW MIL-F-14072 Color Dusty Grey

Electrical

RF Power: 0.5W Average

RF Connectors:

50 ohm models: SMA Female (/BF For BNC Female)

75 ohm models: BNC Female

Connector Options: Type-N and other connectors available.

Configuration Options: Rear mounted connector adding /RM

Environmental

Temperature: -24°C to +70°C

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan DATE: 08-12-2016 APPROVED: T. Nguyen DATE: 08-12-2016		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$ THIRD ANGLE PROJECTION 		DRAWING TITLE: CONTINUOUSLY VARIABLE ATTENUATOR	
				PART NO. ASC-X	
		CAGE CODE: OD2L5		SIZE: N/A	REV: N/A
				DO NOT SCALE THE DRAWING	
				DWG NO. XXXXX	