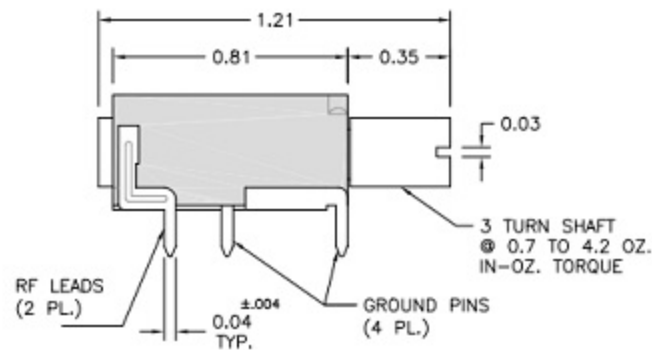


MOUNTING HOLES

GENERAL SPECIFICATIONS

Electrical
RF Power: 0.5W average
RF Connectors: 2 RF Leads
Environmental
Temperature: -24 to +70C

MATERIAL: 		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: CONTINUOUSLY VARIABLE ATTENUATOR	
		SCALE: N/A		SHEET: N/A	
DRAWN: Potheon Luthamhan		DATE: 08-12-2018		PART NO.: APC-X	
APPROVED: T. Nguyen		DATE: 08-12-2018		CAGE CODE: 0D2L5	
REVISIONS: 1.00		SIZE: N/A		REV: N/A	
DO NOT SCALE THE DRAWING		DWG NO.: XXXXX			