


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

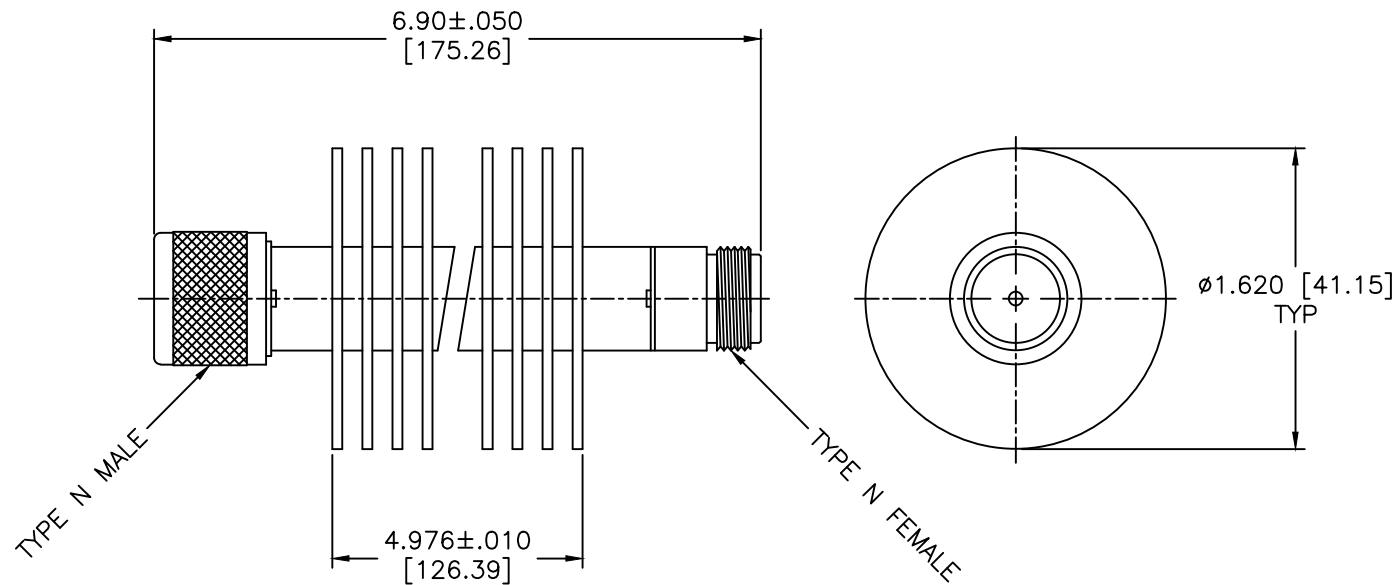

SPECIFICATIONS

Frequency Range: DC–5 GHz

VSWR: 1.35:1 Max.

Power: 50 Watts

Attenuation Value: 5dB to 20dB

Operating Temperature: –65°C to +125°C

Impedance: 50 ohms

Mechanical

Shell: Passivated Stainless Steel

Contact: Gold Plated Beryllium Copper

Housing: Anodized Aluminum

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		SHEET: N/A		
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 50 WATTS ATTENUATOR		
		PART NO. FAN-8		
DRAWN: Paiboon Luekhamhan	DATE: 01-31-2005	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		
APPROVED: T. Nguyen	DATE: 01-31-2005	CAGE CODE: OD2L5	SIZE: A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 82225