


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

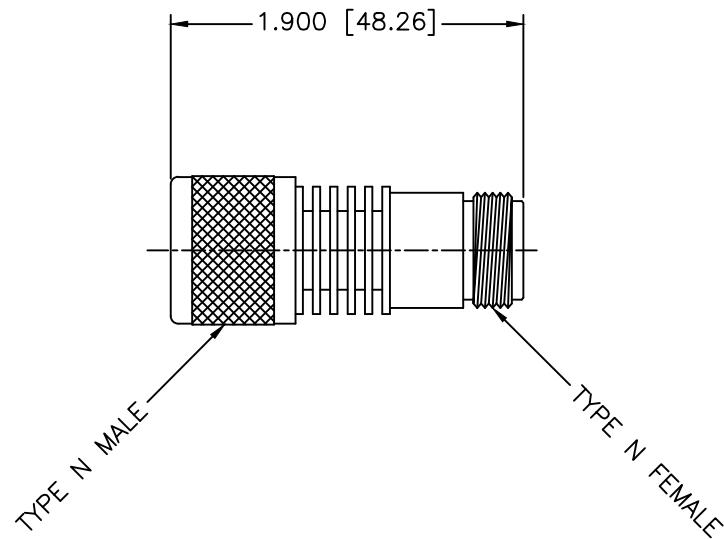

SPECIFICATIONS

Frequency Range: DC–18 GHz

VSWR: 1.35:1 Max.

Power @ 25°C: 5 Watts

Attenuation Accuracy: 3 ± 0.3 dB

Operating Temperature: –55°C to +85°C

Impedance: 50 Ohms

MECHANICAL

Connector Shell: Stainless Steel

Connector Contact: Gold Plated Beryllium Copper

Housing: Aluminum

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.05$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 03-14-2008		DRAWING TITLE: 5 WATTS ATTENUATOR
				PART NO. FAN-17-3
APPROVED: T. Nguyen		DATE: 03-14-2008		CAGE CODE: OD2L5
				SIZE: A REV: N/A DO NOT SCALE THE DRAWING
		DWG NO. 83095		