


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

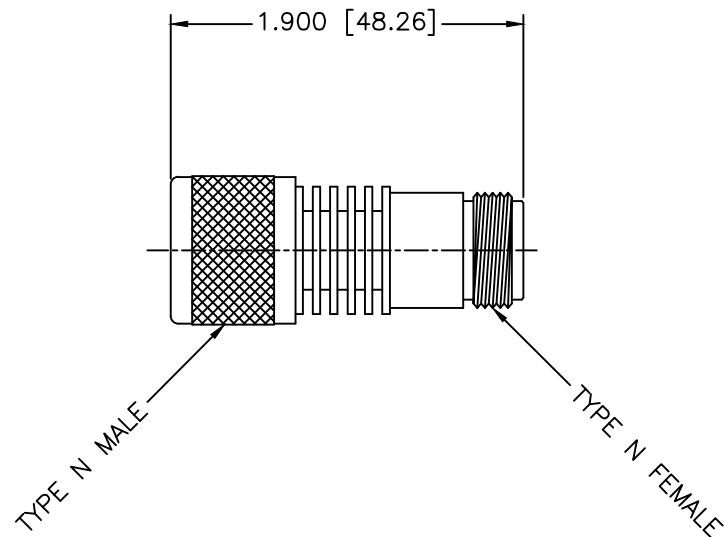

SPECIFICATIONS

Frequency Range: DC–18 GHz

VSWR: 1.35:1 Max.

Power @ 25°C: 5 Watts

Attenuation Accuracy: 20±0.3dB

Operating Temperature: –55°C to +85°C


Impedance: 50 Ohms

MECHANICAL

Connector Shell: Stainless Steel

Connector Contact: Gold Plated Beryllium Copper

Housing: Aluminum

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWN: Paiboon Luekhamhan DATE: 03-14-2008		DRAWING TITLE: 5 WATTS ATTENUATOR		
		PART NO. FAN-17-20		
APPROVED: T. Nguyen DATE: 03-14-2008		PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		
		THIRD ANGLE PROJECTION 		
		CAGE CODE: OD2L5	SIZE: A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 83098