



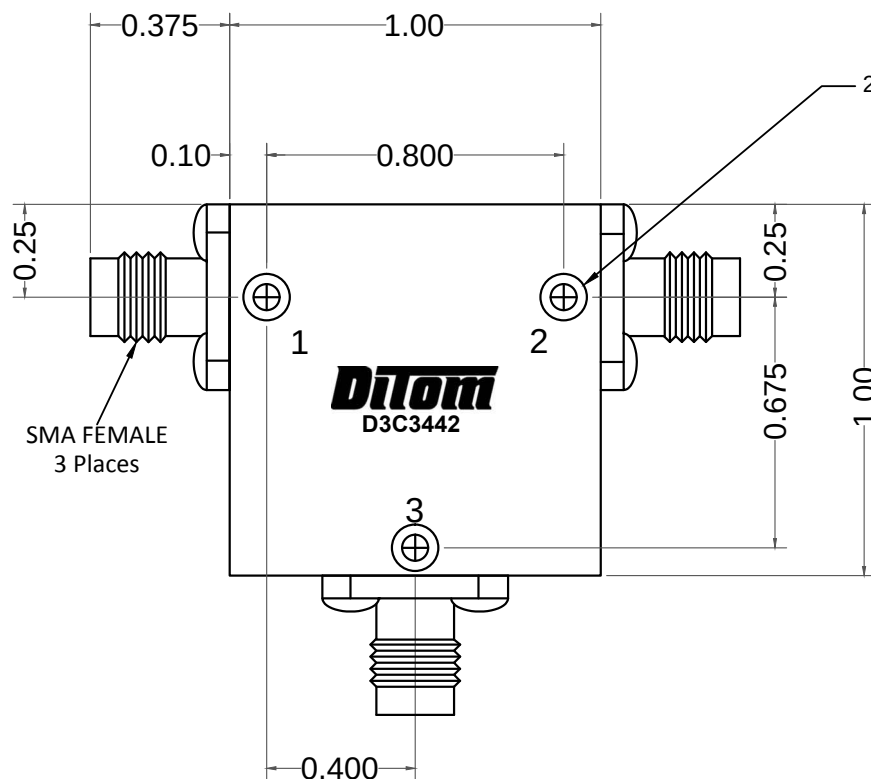

2-56 X 0.15 DP 3 Places (Tapped Holes, Both Sides)

SMA FEMALE
3 Places

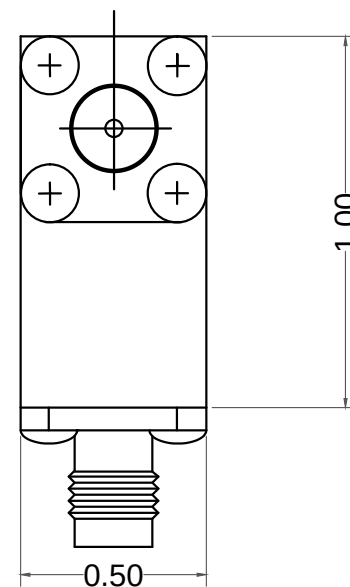

ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz):	3.400 - 4.200
ISOLATION (dB):	20 MIN
INSERTION LOSS (dB):	0.40 MAX
VSWR:	1.25 MAX
POWER: AVG (All PORTS):	20W
PEAK:	30W

MECHANICAL SPECIFICATIONS

CONNECTORS:	SMA-FEMALE, STAINLESS STEEL, PASSIVATE
CONTACT PINS:	BERYLLIUM COPPER, GOLD PLATE
OPERATING TEMPERATURE:	-30° to +65°C
WEIGHT (APPROX):	1.40 OUNCES

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED		 Fresno, California, US	
TOLERANCE XX±0.03 XXX±0.010		TITLE 3.4 - 4.2 SMA Circulator	
SCALE 4:1		MODEL NO D3C3442	REV