

140 to 300MHz – Dual Junction Coaxial Isolator

Design Features

- ◆ Can be dual junction even three for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYCDI11256A140T142SF	140 ~ 142	1.6	36	1.3	100	30	SMA-F	-10 ~ +60
UIYCDI11256A147T150NF	147 ~ 150	1.6	36	1.3	300	30	N-F	-10 ~ +60
UIYCDI11256A150T155SF	150 ~ 155	1.0	40	1.25	100	30	SMA-F	-10 ~ +70
UIYCDI11256A150T170SF	150 ~ 170	1.4	36	1.3	100	30	SMA-F	-10 ~ +70
UIYCDI11256A168T171NF	168 ~ 171	0.8	45	1.2	300	30	N-F	-30 ~ +70
UIYCDI11256A170T200SF	170 ~ 200	1.4	36	1.3	100	30	SMA-F	-30 ~ +70
UIYCDI11256A180T220SF	180 ~ 220	1.2	36	1.3	100	30	SMA-F	-30 ~ +70
UIYCDI11256A192T232NF	192 ~ 232	0.8	40	1.25	300	30	N-F	-30 ~ +70
UIYCDI11256A1975T2075SMTSF	197.5~207.5	0.8	45	1.2	100	30	SMA-M to SMA-F	-30 ~ +70
UIYCDI11256A200T250SF	200 ~ 250	1.2	40	1.25	100	30	SMA-F	-30 ~ +70
UIYCDI11256A230T250NF	230 ~ 250	0.8	45	1.2	300	30	N-F	-30 ~ +70
UIYCDI11256A250T300SF	250 ~ 300	0.8	40	1.25	100	30	SMA-F	-30 ~ +70

² List are specify frequency range and other ranges available.


² Please enter below information when inquiry and mark * is must.

* 1. The specific frequency range

* 2. Power handling (Forward, Reverse, Peak, etc.)

3. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

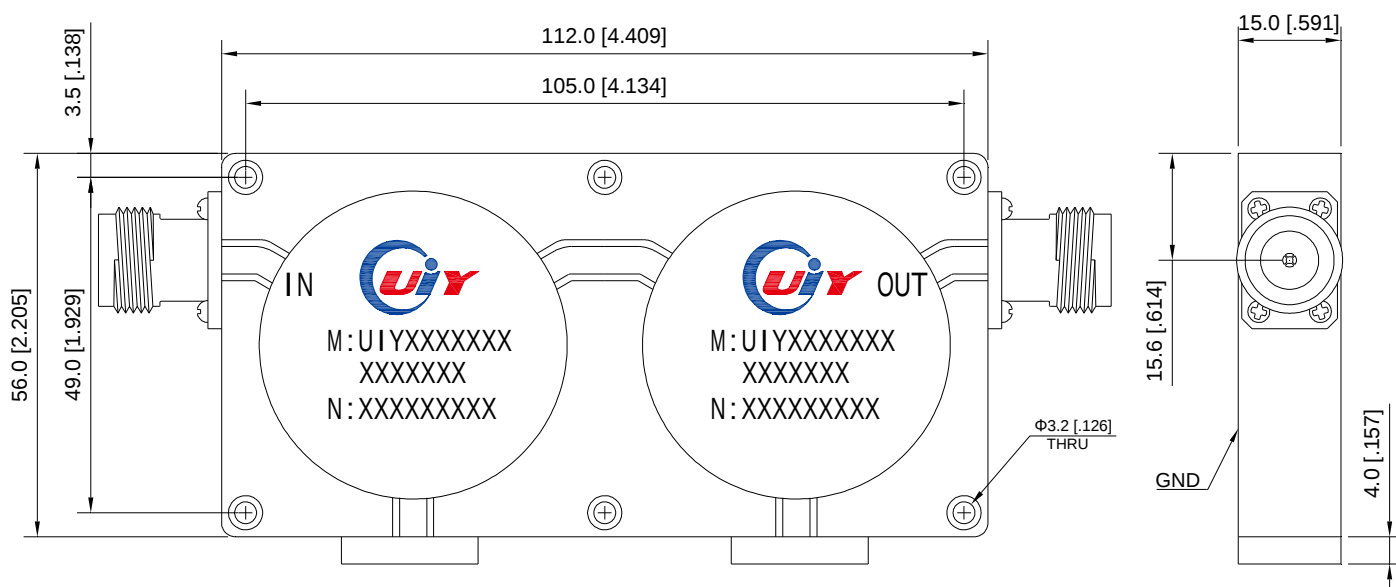

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5