
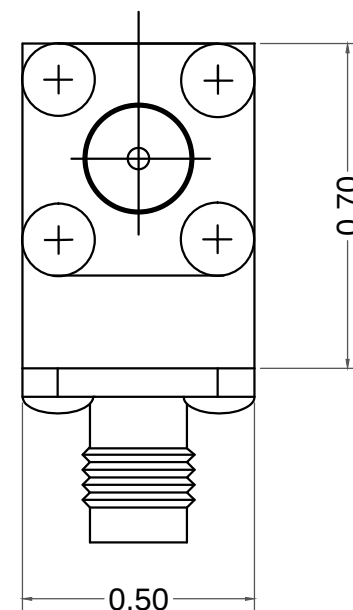


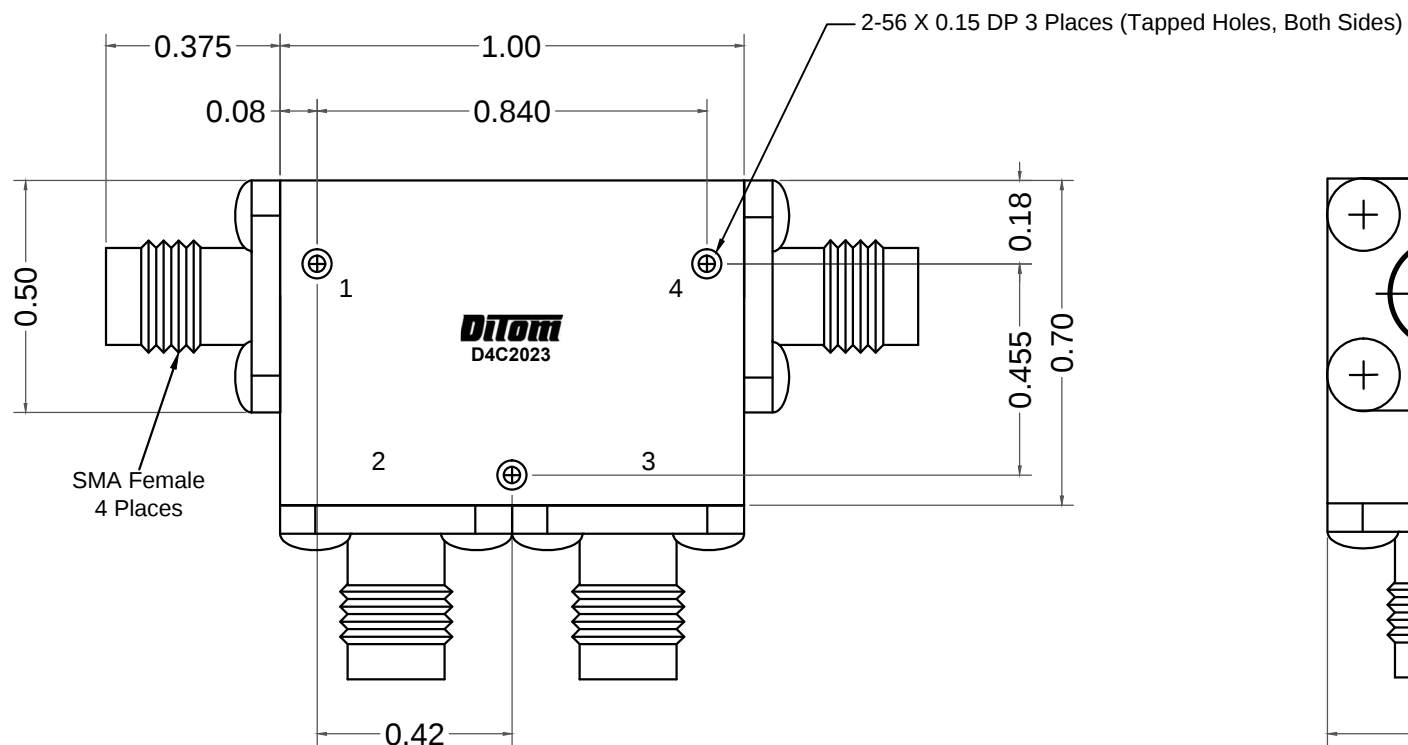

ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz):	20.0 - 23.0
ISOLATION (dB):	22 MIN (PER JUNCTION)
INSERTION LOSS (dB):	0.40 MAX (PER JUNCTION)
VSWR:	1.20 MAX
POWER: AVG (ALL PORTS):	10W
PEAK:	50W

MECHANICAL SPECIFICATIONS

CONNECTORS:	SMA-FEMALE, PASSIVATED STAINLESS STEEL
CONTACT PINS:	BERYLLIUM COPPER, GOLD PLATE
OPERATING TEMPERATURE:	-20° to +65°C
WEIGHT (APPROX):	1.30 OUNCES

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED		 Fresno, California, USA	
TOLERANCE	XX±0.03 XXX±0.010	TITLE 20.0 - 23.0GHz SMA Circulator	
SCALE	5:1	MODEL NO	REV
		D4C2023	