


DASH #	BODY FINISH	CONTACT FINISH		
-1	PASSIVATED	GOLD		
-2	GOLD	GOLD		

NOTES:

A.) ELECTRICAL SPECS:

- 1.) VOLTAGE RATING/335 VRMS
- 2.) IMPEDANCE/50 OHMS
- 3.) FREQUENCY RANGE/0 TO 12.4 GHz.
- 4.) DIELECTRIC WITHSTANDING VOLTAGE/1,500VRMS
- 5.) INSULATION RESISTANCE/5,000 MEGOHMS MIN.

B.) TEMPERATURE RANGE/-65° TO +165° C.

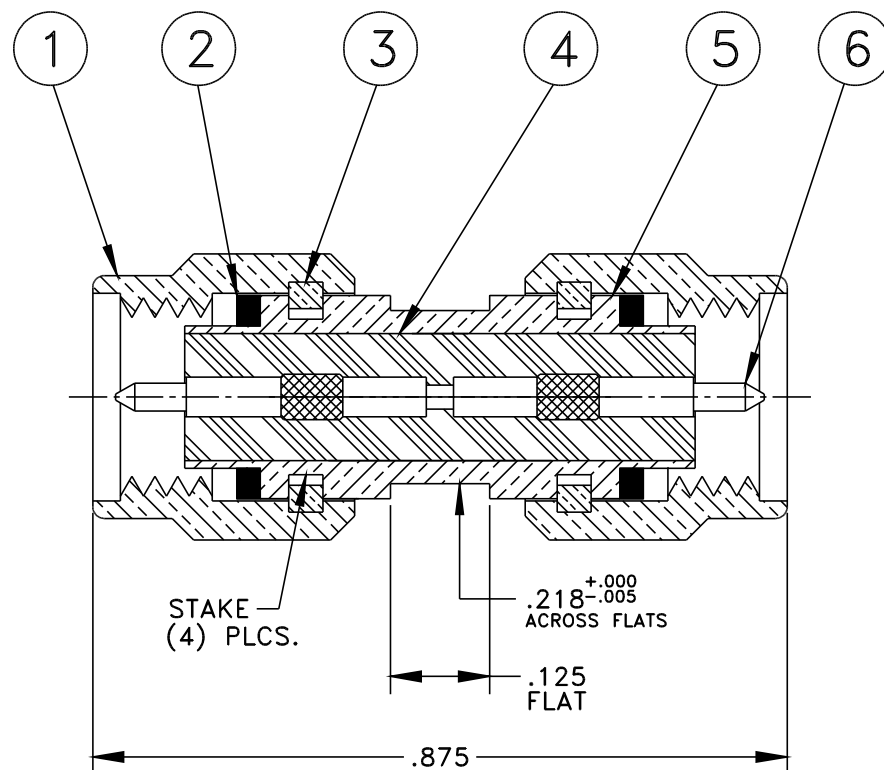

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION
& MAY NOT BE REPRODUCED OR DISCLOSED TO OTHERS
WITHOUT WRITTEN CONSENT FROM CONNECTRONICS, INC.

CONNECTRONICS, INC.
EDINBURGH, INDIANA

FSCM 43608

TOLERANCES
UNLESS OTHERWISE SPECIFIED

DWG BY: RLC DATE: 6/26/01

APVD BY: SCALE: _____

MATERIAL: _____

FINISH: _____

DESCRIPTION: SMA
ADAPTOR, PLUG
TO PLUG

2 PL DEC $\pm .020$ 3 PL DEC $\pm .005$ ANG. DIM $\pm 1/2^\circ$

DRAWING NO.
42-607
SHT 1 OF 1

REVISIONS

-B-
ECN2715
DRAWN ON CAD
REMOVED EPOXY &
ADDED STAKING.
RLC 6/26/01