
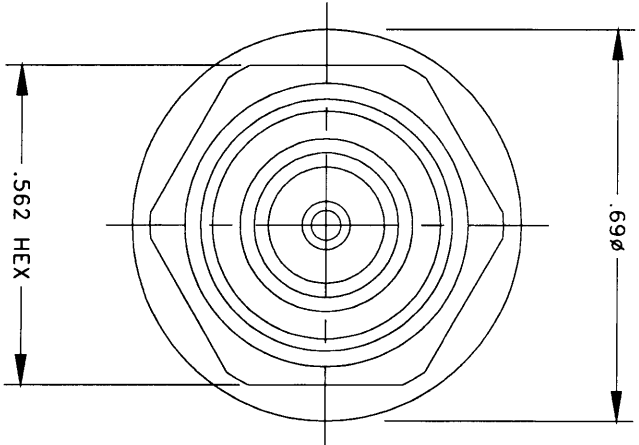


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION
& MAY NOT BE REPRODUCED OR DISCLOSED TO OTHERS
WITHOUT WRITTEN CONSENT FROM CONNECTRONICS, INC.

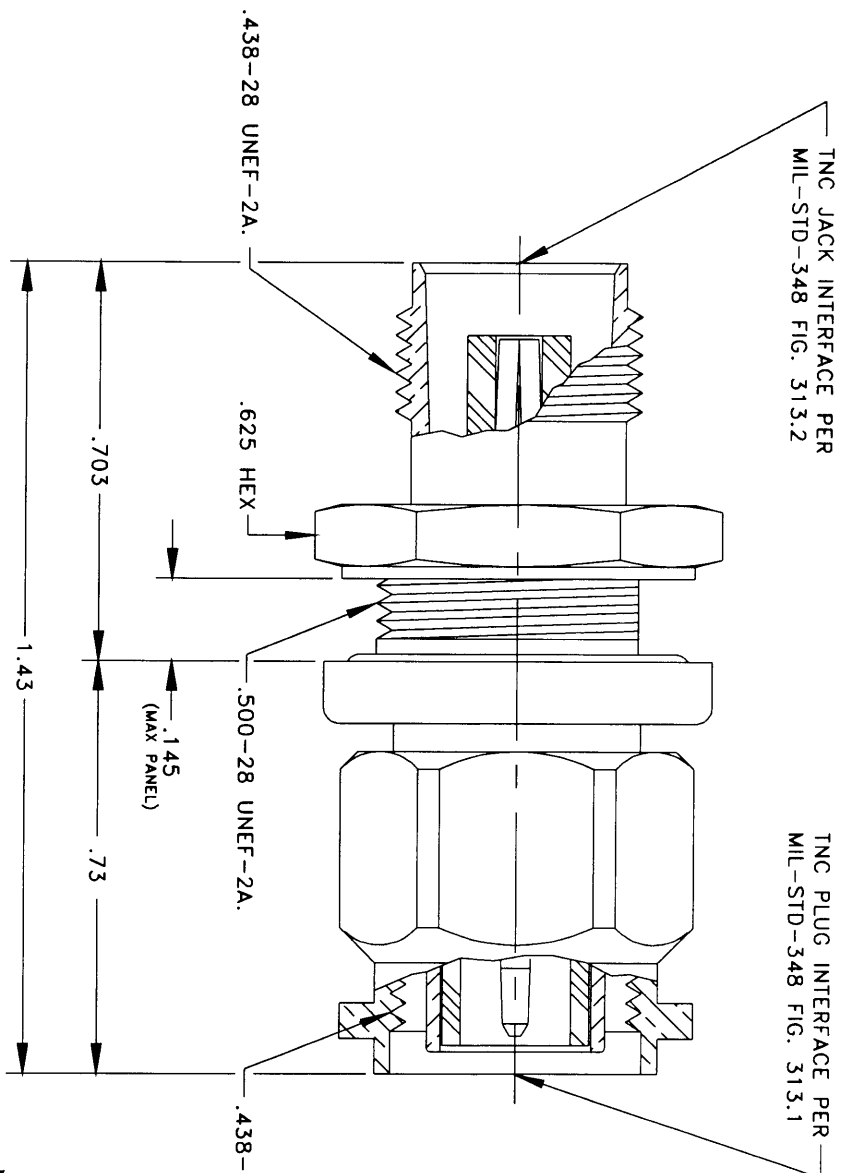

— OUTLINE DRAWING —

 CONNECTRONICS, INC. EDINBURGH, INDIANA		FSCM 43608	
DWG BY: JOHN B		DATE: 3/16/09	
APVD BY:		SCALE:	
MATERIAL:		2 PL DEC ±.020	
FINISH:		3 PL DEC ±.005	
DESCRIPTION: TNC ADAPTOR, PLUG TO JACK, BULKHEAD MOUNT		ANG. DIM ±1/20	
		DRAWING NO. 44-626-1	
		SHT 1 OF 2	

REVISIONS

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION
& MAY NOT BE REPRODUCED OR DISCLOSED TO OTHERS
WITHOUT WRITTEN CONSENT FROM CONNECTRONICS, INC.

NOTES:

A.) ELECTRICAL SPECS:

- 1.) IMPEDANCE / 50 OHMS.
- 2.) VOLTAGE RATING / 500 VRMS.
- 3.) DIELECTRIC WITHSTANDING VOLTAGE / 1,500 VRMS.
- 4.) INSULATION RESISTANCE / 5,000 MEGOHMS MIN.
- 5.) FREQUENCY RANGE / DC TO 11Ghz.


B.) TEMPERATURE RANGE / -65° TO +165°C

C.) MATERIAL:

- 1.) BODY, SLEEVE & HEX NUT / 360 BRASS PER QQ-B-626.
- 2.) CONTACT / BERYLLIUM COPPER PER QQ-C-530.
- 3.) INSULATORS / TEFLON PER ASTM-D1457.
- 4.) O-RING & GASKET / SILICONE RUBBER PER ZZ-R-765.
- 5.) LOCKWASHER & SNAP RING / PHOSPHOR BRONZE.

D.) FINISH:

- 1.) BODY, SLEEVE, HEX NUT & LOCKWASHER / .0002 MIN. NICKEL PER QQ-N-290.
- 2.) CONTACT / .00005 MIN. GOLD OVER NICKEL PER MIL-G-45204.



—MOUNTING HOLE—

— OUTLINE DRAWING —

 CONNECTRONICS, INC. EDINBURGH, INDIANA		FSCM 43608
DWG BY: JOHN B	DATE: 3/16/09	TOLERANCES UNLESS OTHERWISE SPECIFIED
APVD BY:	SCALE:	2 PL DEC ±.020
MATERIAL:		3 PL DEC ±.005
FINISH:		ANG. DIM ±1/2°
DESCRIPTION: TNC ADAPTOR, PLUG TO JACK, BULKHEAD MOUNT		DRAWING NO. 44-626-1 SHT 2 OF 2

REVISIONS