

46-608

SHT 1 OF 1

DASH #	BODY FINISH	CONTACT FINISH				
-1	SILVER	SILVER				
-2	SILVER	GOLD				
-3	NICKEL	GOLD				
-4	TRI-M3	GOLD				



This document contains proprietary information
& may not be reproduced or disclosed to others
without written consent from Connectronics, Inc.

NOTES:

A. ELECTRICAL SPECS:

- 1.) IMPEDANCE - 50 OHMS.
- 2.) VOLTAGE RATING - 1,000 V RMS.
- 3.) FREQUENCY RANGE - 0 TO 11 GHz.
- 4.) DIELECTRIC WITHSTANDING VOLTAGE - 2,500 VRMS.
- 5.) INSULATION RESISTANCE - 5,000 MEGOHMS MIN.

B) TEMPERATURE RANGE -65° TO +165°C

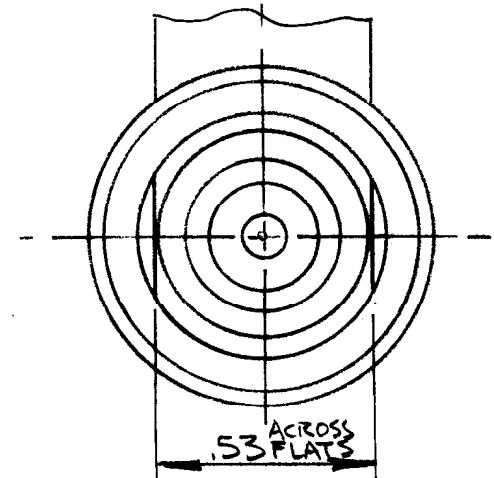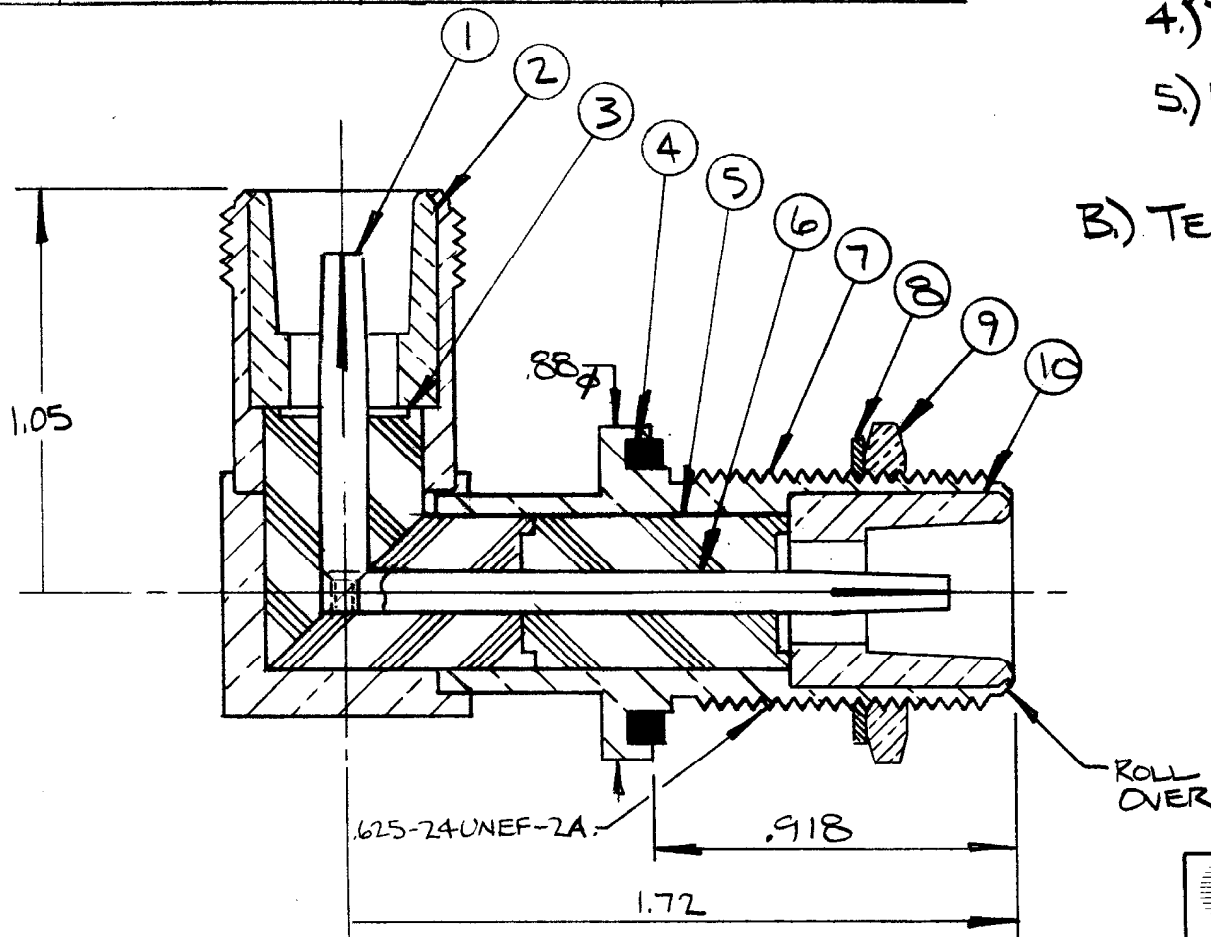

Connectronics, Inc. FRANKLIN, INDIANA		FSCM NO. 43608
DWG BY: <u>JOHN B</u>	DATE: <u>6-6-91</u>	TOLERANCES UNLESS OTHERWISE SPECIFIED
APP'D BY: <u>JPB</u>	SCALE: <u> </u>	2 PL DEC ± .020
MATERIAL: <u> </u>		3 PL DEC ± .005
FINISH: <u> </u>		ANG. DIM ± 1/2°
DESCRIPTION: N ADAPTOR, JACK TO JACK, R/A, S.H.M.		DRAWING NO. 46-608
		SHT 1 OF 1

REVISIONS

-A-	ECN1599
ADDED -3	
KLR	5/7/96
-B-	ECN2537
ADDED -4	
RLC	11/10/00